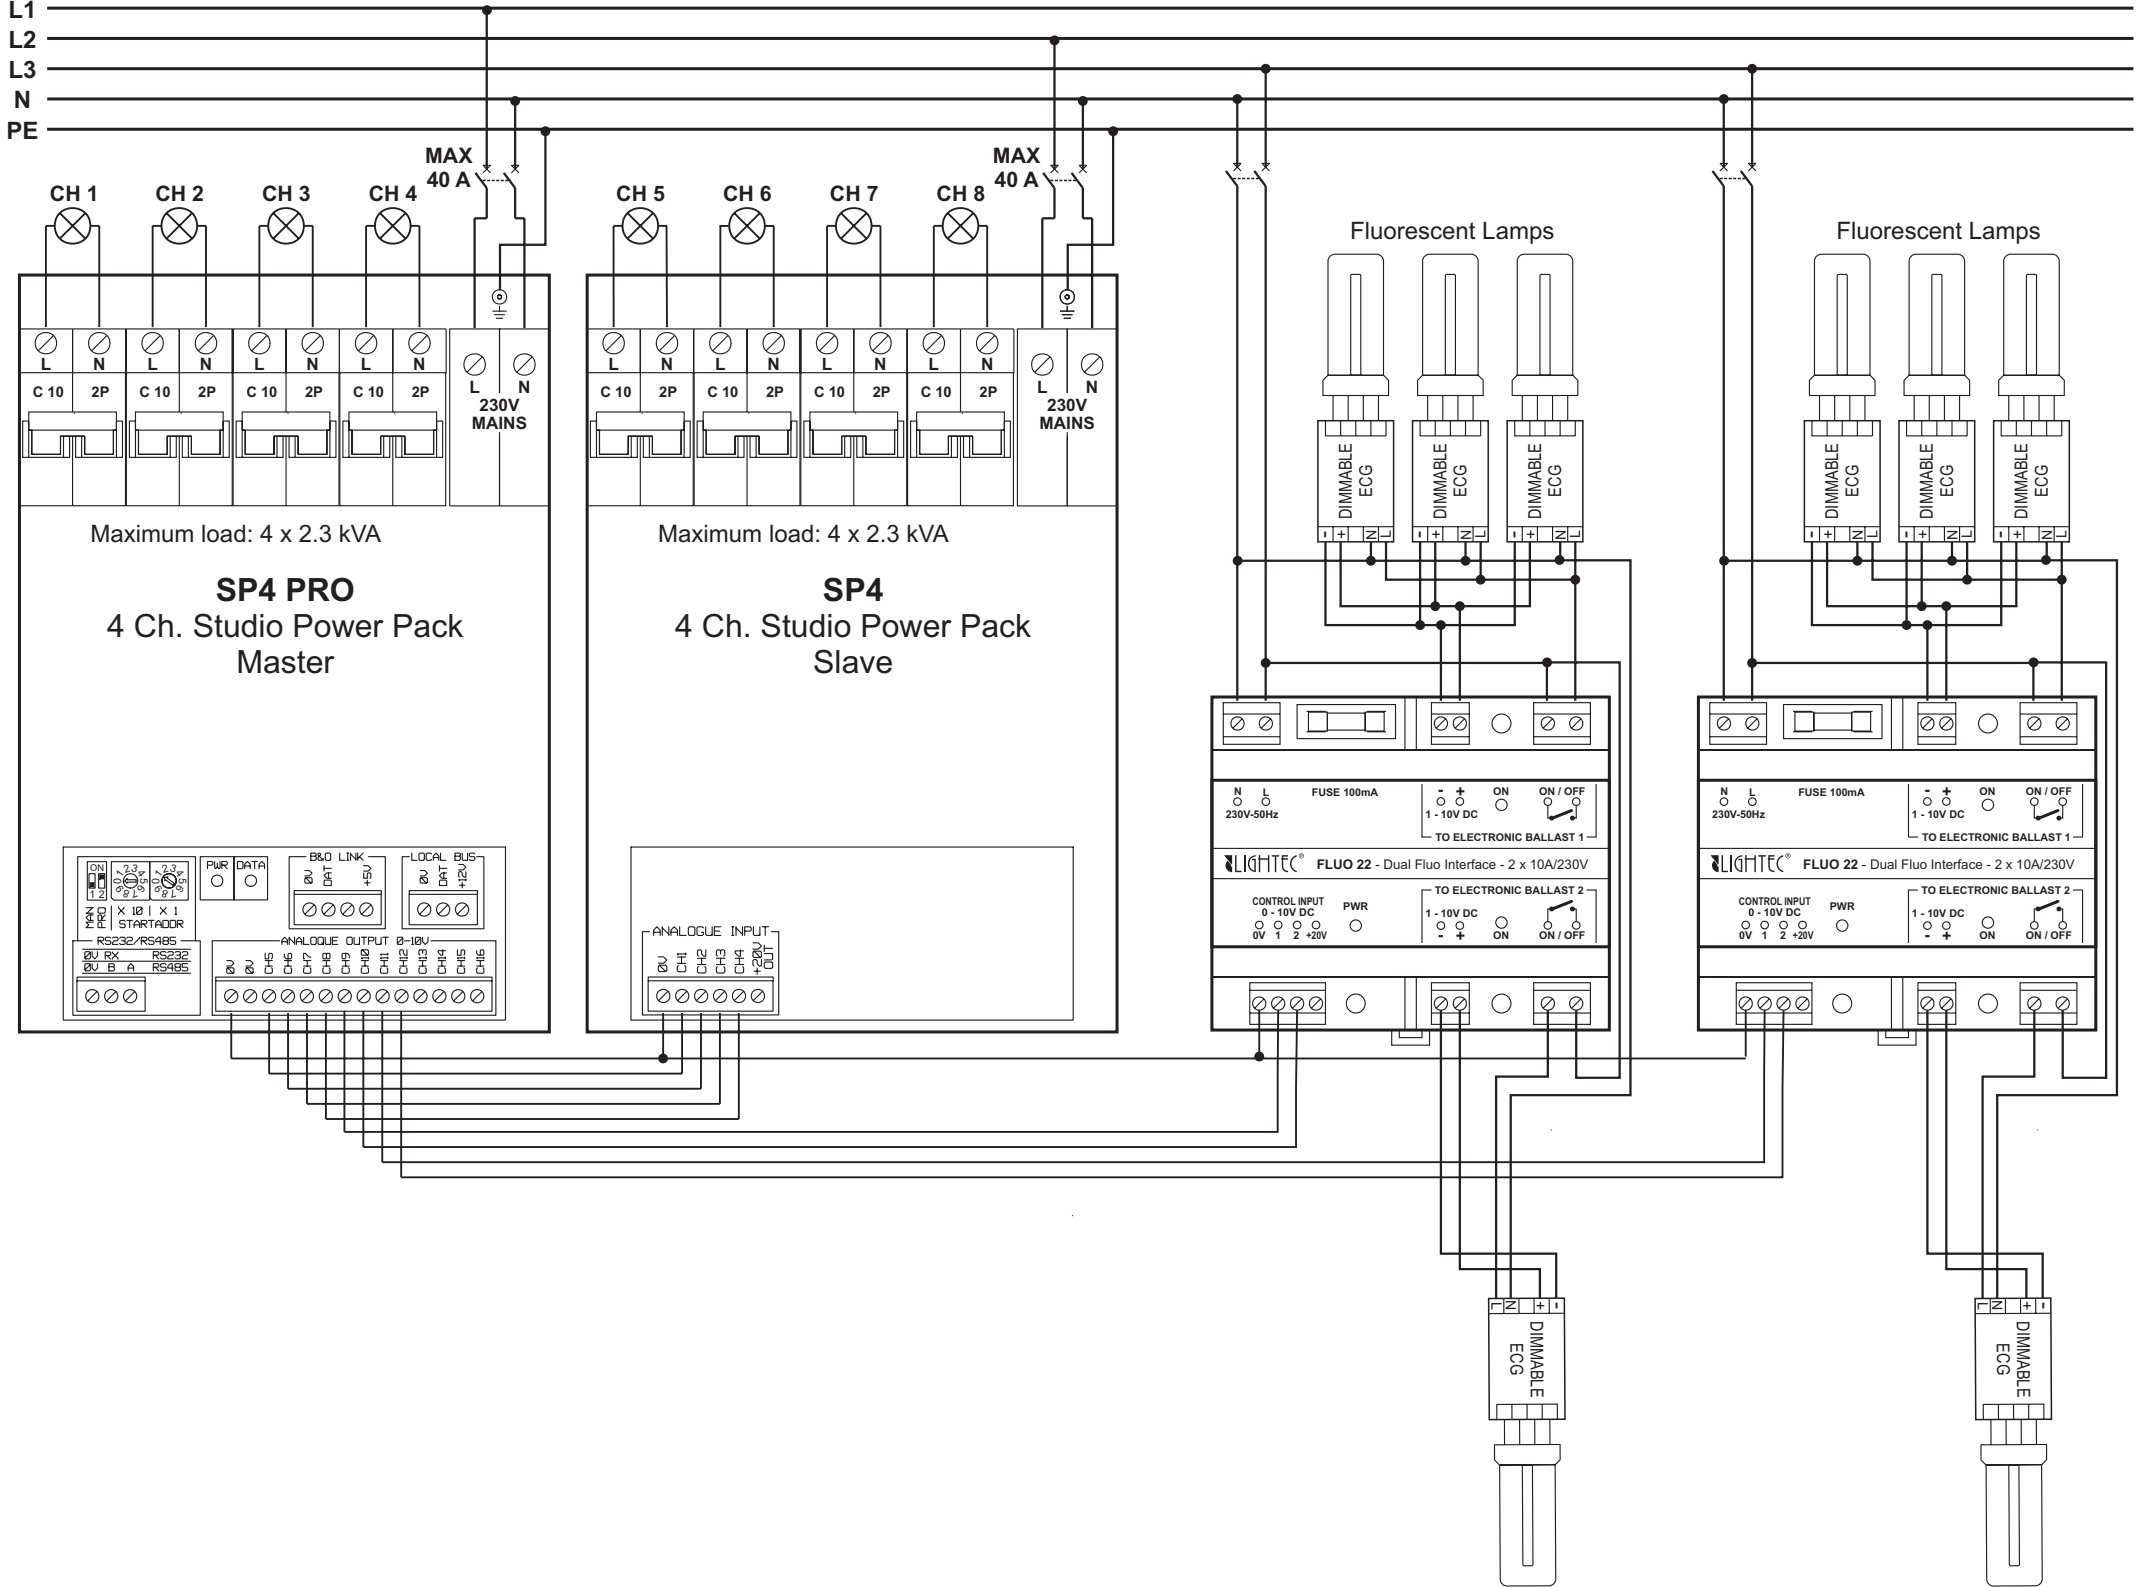
L1
L2
L3
N
PE
MAX 40 A
MAX 40 A
CH 1
CH 2
CH 3
CH 4
CH 5
CH 6
CH 7
CH 8
L
N
C 10
2P
230V MAINS
Maximum load: 4 x 2.3 kVA
SP4 PRO
4 Ch. Studio Power Pack
Master
Maximum load: 4 x 2.3 kVA
SP4
4 Ch. Studio Power Pack
Slave
Fluorescent Lamps
Fluorescent Lamps
DIMMABLE ECG
FUSE 100mA
230V-50Hz
1 - 10V DC
ON
ON / OFF
TO ELECTRONIC BALLAST 1
TO ELECTRONIC BALLAST 2
FLUO 22 - Dual Fluo Interface - 2 x 10A/230V
CONTROL INPUT 0 - 10V DC
PWR
PWR
DATA
B&D LINK
LOCAL BUS
RS232/RS485
ANALOGUE OUTPUT 0-10V
ANALOGUE INPUT
STARTADDR