

SLAVE RECEIVER TVRGB868 CONTROLLING LED STRIPS WITH DIMMING FUNCTION

IT

Attenzione

Lo slave può essere collegato solo ai ricevitori TVRGBD868ST25 che riportano la dicitura “**Master**” in etichetta

EN

Warning

The slave receiver can be connected only to TVRGBD868ST25 receiver with “**Master**” label

FR


Attention

Le récepteur slave peut être relié seulement à récepteurs TVRGBD868ST25 avec l'étiquette “**Master**”

TECHNICAL SPECIFICATIONS

-Power supply	12 Vdc to 24 Vdc
-Current on the RGB outputs	350 mA 700 mA
-Max. power for each output	3 x 2,5A
-Cable sections in input and output	1,5 mm
-Reception frequency	868.3 MHz
-Intermediate frequency IF	10.7 MHz
-Sensibility (finely tuned signal)	1 µV
-Operating temperature range	-20° - +60°C

In the view of a constant development of their products, the manufacturer reserves the right for changing technical data and features without prior notice.

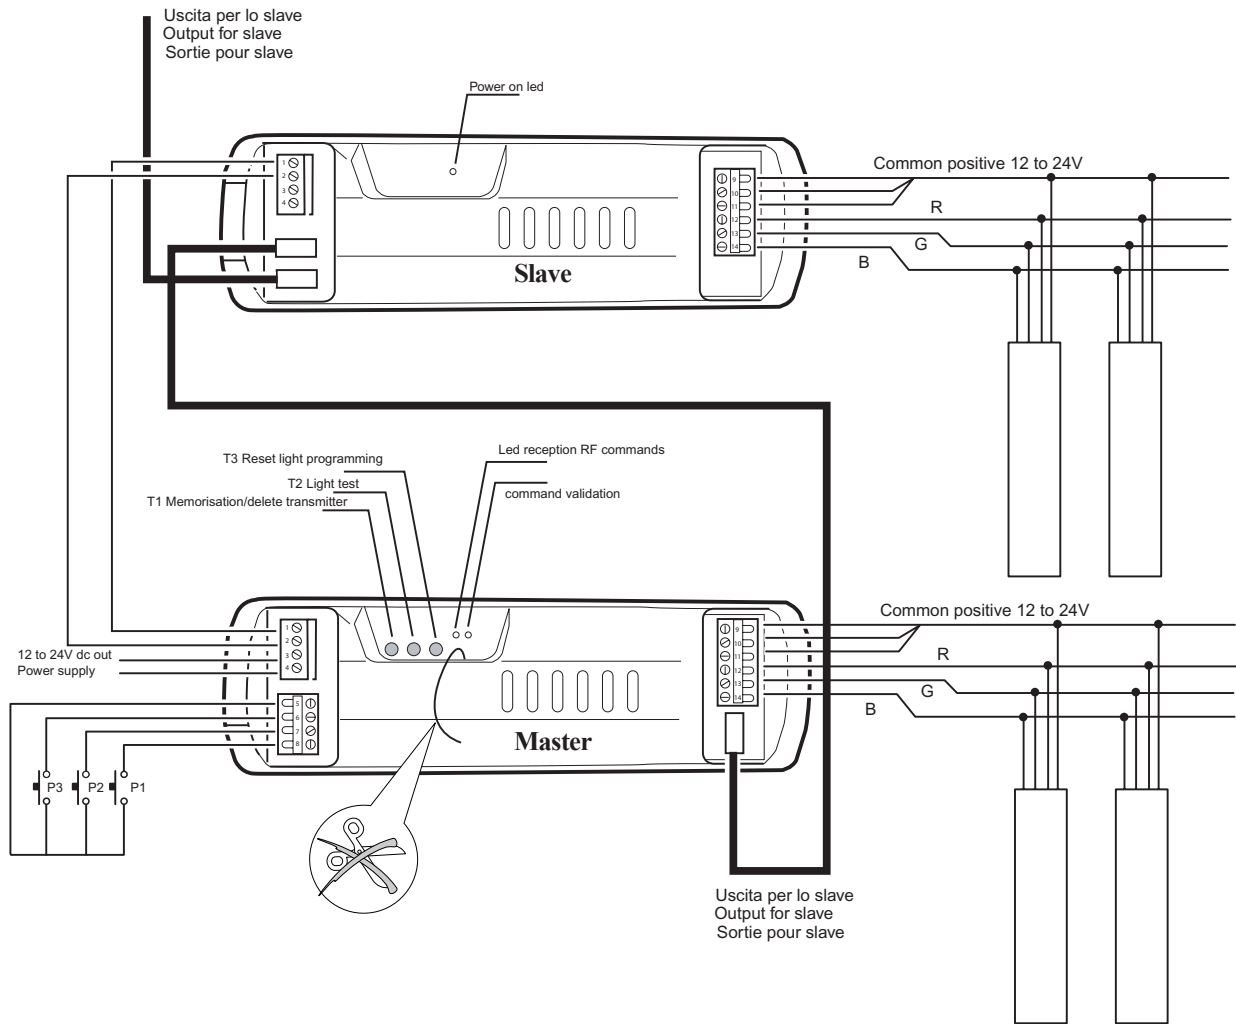

Code Number:	Series	Model number	Draft	Date
TVRGBD000ST25	TVLink RS868		T	22-05-08