
DEKOLIGHT

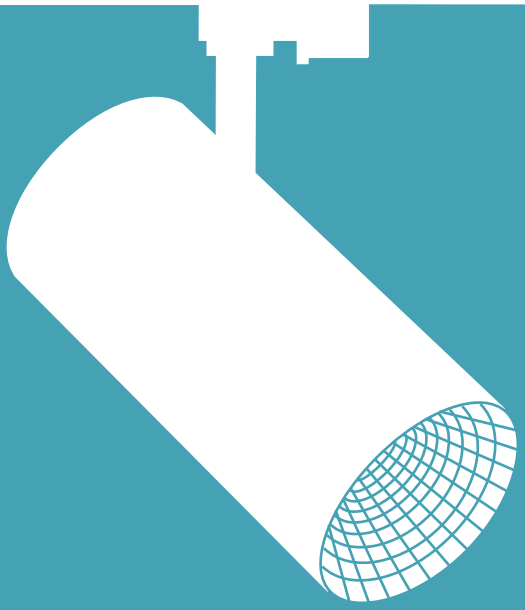

MAIN CATALOGUE 22 // 23

EXPERTISE IN LIGHT
our sales team for office and field service

DISTRIBUTION
+31 (0)13 590 01 30
info@light-technology.nl

All prices are recommended gross sales prices including VAT. We keep the right to adjust the prices during the validity of the catalogue. You will always find the current prices on our website. Our general terms and conditions apply. Errors and availability reserved. All articles are basically delivered without illuminants, unless the product description specifies otherwise.

5 YEAR MANUFACTURER'S WARRANTY

All DEKO-LIGHT brand products come with a five-year extended warranty.

DEKO-LIGHT lighting solutions have always stood for maximum reliability and performance based on strict quality guidelines. For example, the products are regularly checked during the development and production process in order to provide users from all sectors with a fault-free product. The extension of the manufacturer's warranty underlines this quality promise once again.



INTERIOR LIGHTS

04 pendant lights
48 surface mounted ceiling lights
90 built in ceiling lights
152 insert panels
154 insert panels | backlight technology
160 insert panels | sidelight technology
170 surface mounted wall lights
200 built in wall lights
204 reading lights
210 table and floor lights
224 furniture lights
238 showcase lights
246 office lights
268 hall floodlight
274 damp-proof luminaires
282 emergency lights

POWER RAILS

290 D LINE power rail system
318 power luminaires

BATTERY AND SOLAR LIGHTS

342 battery lights
354 solar lights

OUTDOOR LIGHTS

362 bollard lights
386 surface mounted wall lights
424 ceiling and wall lights
430 built in wall lights
440 spherical and floor lamps
446 energy distributor
454 surface mounted and ground spike lights
468 wall washer
472 ground recessed lights
502 underwater lights
508 floodlight
516 display lights

ALUMINIUM PROFILES

532 U-profiles | flat + high | built-in/built-on
544 T-profiles | flat + high | built-in
556 H- und groove-profiles
566 step/plinth/angle/corner-profiles | built-in/built-on
592 dry construction profiles
602 tile profiles
618 profiles for outdoor use | walkable/trafficable

LED STRIPES

634 quick finder
638 COB | 1CH / 2CH / 3CH | 24V
646 standard | 1CH | 12V / 24V / 48V
656 standard | 2CH | 12V / 24V
662 standard | 3CH | 24V
666 standard | 4CH | 24V
670 D FLEX LINE top-view | 1CH / 3CH / 4CH | 24V
678 D FLEX LINE side-view | 1CH / 4CH | 24V
684 230V | 1CH

POWER SUPPLIES

692 DC | CV | quick finder
696 DC | CV
708 DC | CC | quick finder
710 DC | CC
722 DC | CC/CV
724 AC | CV | quick finder
725 AC | CV
727 gear units for metal vapour lamps

CONTROLLER

732 Quasar
740 Casambi Bluetooth
742 RF controller | 1 - 4 channel
744 RF touchpanel | 1 - 4 channel
746 quick finder | DMX controller
747 quick finder | DMX dimmer
748 DMX wall controller
752 DMX controller
754 DMX dimmer
758 DALI PWM dimmer

ILLUMINANTS

764 G4
764 AR111
765 MR16/GU5,3
766 G9
767 GU10
768 GU10/ES111
769 E14
770 E27
774 R7s
774 GX53
775 neon tubes
776 metal vapour lamps

ACCESSORIES

782 indoor | dimming
785 indoor | other
787 indoor | low voltage
791 outdoor | low voltage DC | WEIPU HQ plug-in connector
794 DMX cable
796 indoor | high voltage
799 outdoor | high voltage | plug systems
801 outdoor | cable connectors
804 mounting material for LED stripes and profiles
805 outdoor | mounting accessories
806 chemical products



INTERIOR LIGHTS

04 pendant lights
48 surface mounted ceiling lights
90 built in ceiling lights
152 insert panels
154 insert panels | backlight technology
160 insert panels | sidelight technology
170 surface mounted wall lights
200 built in wall lights
204 reading lights
210 table and floor lights
224 furniture lights
238 showcase lights
246 office lights
268 hall floodlight
274 damp-proof luminaires
282 emergency lights



page 09



page 11



page 11



page 13



page 14



page 15



page 15



page 16



page 16



page 17



page 17



page 18



page 18



page 20



page 22



page 24



page 24



page 25



page 25



page 26



page 26



page 28



page 28

pendant lights



page 30



page 32



page 34



page 34



page 36



page 39



page 41



page 43



page 45



page 46



DIVERSITY

As colourful as life itself - with DIVERSITY we set an example for more colour and diversity. The pendant luminaire series based on a patented design by Johannes Tomm offers a choice of seven colours and can be combined as desired. With a cable length of 3 metres, DIVERSITY is also convincing in high rooms. The retrofit compatibility with all E27 light sources of the A60 design allows even more variety.










DIVERSITY

- Design by Johannes Tomm
- wide range of colours
- dimensions L x Ø: 200 x 280 mm
- socket H x Ø: 25 x 100 mm
- max. suspension: 3000 mm
- dimmable via optional illuminants

item	colour	price
342170	white	**79,95 €**
342172	grey	**79,95 €**
342171	black	**79,95 €**
342173	red	**79,95 €**
342174	yellow	**79,95 €**
342175	blue	**79,95 €**
342176	green	**79,95 €**



suitable illuminants on page 770-773



ASTEROPE

Light & shadow: Hardly any luminaire embodies this dualism more beautifully than the ASTEROPE in its various versions. The downward-opening pendant luminaire creates a multifaceted play of light and shadow on walls and ceilings that blends extravagantly yet harmoniously into any ambience. Our tip: Combine the ASTEROPE with a goldcoloured or milky light source from the Filament series.

ASTEROPE ROUND



- metal
- socket H x Ø: 25 x 120 mm
- max. suspension: 1095 mm
- dimmable via optional illuminants

item	colour		dimensions L x Ø	power	price
342129	☐	white	1400 x 250 mm	1x max. 40 W	**94,95 €**
342132	■	black	1400 x 250 mm	1x max. 40 W	**94,95 €**
342130	☐	white	1500 x 400 mm	1x max. 40 W	**189,95 €**
342133	■	black	1500 x 400 mm	1x max. 40 W	**189,95 €**
342131	☐	white	1600 x 500 mm	3x max. 40 W	**279,95 €**
342134	■	black	1600 x 500 mm	3x max. 40 W	**279,95 €**

220-240 Volt | 1x max. 40 W | E27 | LED

suitable illuminants on page 770-771





suitable wall lights page 172
341216
341217

ASTEROPE LINEAR

- metal
- dimensions L x H x Ø: 1500 x 300 x 150 mm
- socket H x Ø: 25 x 120 mm
- max. suspension: 1175 mm
- dimmable via optional illuminants

item	colour		price
342135	☐	white	**94,95 €**
342136	■	black	**94,95 €**

220-240 Volt | 1x max. 40 W | E27 | LED

suitable illuminants on page 770-771, 773



suitable table / floor lights page 216
346003
346004
343020
343021





LUCEA 10

- aluminium diecast
- dimensions H x Ø: 157 x 65 mm
- socket H x Ø: 29 x 104,5 mm
- max. suspension: 1800 mm
- dimmable via phase control or phase cut-off
- light colour adjustable via dip switch

item	colour		colour temperature	light current	price
342177	☐	white	WW NW 3000 / 4000 K	930 / 1000 lm	**139,95 €**
342178	■	black	WW NW 3000 / 4000 K	930 / 1000 lm	**139,95 €**

220-240 Volt | 10 W | 1 LED | Ra>90 | 36° | + −

accessories

930679	lens 24°	**9,95 €**





suitable surface mounted ceiling lights
from page 84
348153
348154
348161
348162



suitable power luminaires
from page 332
707116
707117
707124
707125



LUCEA 15 + 20

- aluminium diecast
- dimensions H x Ø: 178 x 85 mm
- socket H x Ø: 29 x 104,5 mm
- max. suspension: 1800 mm
- dimmable via phase control or phase cut-off
- light colour adjustable via dip switch

item	colour		colour temperature	light current	power	price
342179	☐	white	WW NW 3000 / 4000 K	1460 / 1500 lm	15 W	**159,95 €**
342180	■	black	WW NW 3000 / 4000 K	1460 / 1500 lm	15 W	**159,95 €**
342181	☐	white	WW NW 3000 / 4000 K	1930 / 2000 lm	20 W	**179,95 €**
342182	■	black	WW NW 3000 / 4000 K	1930 / 2000 lm	20 W	**179,95 €**

220-240 Volt | 1 LED | Ra>90 | 36° | + −

accessories

930680	lens 24°	**12,95 €**
930681	lens 60°	**12,95 €**





suitable surface mounted ceiling lights
from page 84
348155-348158
348163-348166



suitable power luminaires
from page 332
707118-707121
707126-707129





SLIM

- aluminium diecast
- dimensions H x Ø: 300 x 39 mm
- socket H x Ø: 25 x 100 mm
- max. suspension: 1800 mm
- textile cable
- UGR <19

item	colour		colour temperature		light current	price
342214	☐	white	ww	3000 K	500 lm	**79,95 €**
342213	■	black	ww	3000 K	500 lm	**79,95 €**

220-240 Volt | 5 W | 1 LED | Ra>90 | 24°

suitable power luminaires page 335
707133
707132



SLIM

- aluminium diecast
- dimensions H x Ø: 300 x 39 mm
- socket L x B x H: 370 x 80 x 26 mm
- max. suspension: 1800 mm
- textile cable
- UGR <19

item	colour		colour temperature		light current	price
342216	☐	white	ww	3000 K	3x 500 lm	**209,95 €**
342215	■	black	ww	3000 K	3x 500 lm	**209,95 €**

220-240 Volt | 3x 5 W | 1 LED | Ra>90 | 24°



SLIM

- aluminium diecast
- dimensions H x Ø: 300 x 39 mm
- socket H x Ø: 240 x 25 mm
- max. suspension: 1800 mm
- textile cable
- UGR <19

item	colour		colour temperature		light current	price
342218	☐	white	ww	3000 K	3x 500 lm	**209,95 €**
342217	■	black	ww	3000 K	3x 500 lm	**209,95 €**

220-240 Volt | 3x 5 W | 1 LED | Ra>90 | 24°



POLARIS

- concrete
- dimensions L x B x H: 70 x 70 x 250 mm
- socket L x B x H: 80 x 80 x 30 mm
- max. suspension: 1200 mm
- dimmable via optional illuminants

item	colour	price
342095	grey	**69,95 €**

220-240 Volt | 1x max. 35 W | GU10 | LED

suitable illuminants on page 767-768



POLLUX

- concrete
- dimensions H x Ø: 250 x 70 mm
- socket H x Ø: 35 x 90 mm
- max. suspension: 1200 mm
- dimmable via optional illuminants

item	colour	price
342096	grey	**69,95 €**

220-240 Volt | 1x max. 35 W | GU10 | LED

suitable illuminants on page 767-768



BARRO II

- gypsum
- dimensions H x Ø: 250 x 70 mm
- socket H x Ø: 31 x 70 mm
- max. suspension: 1200 mm
- dimmable via optional illuminants

item	colour	price
342024	white paintable	**75,95 €**

220-240 Volt | 1x max. 35 W | GU10 | LED

suitable illuminants on page 767-768



CONCRETO I

- concrete
- dimensions H x Ø: 188 x 188 mm
- socket H x Ø: 25 x 120 mm
- max. suspension: 1600 mm
- dimmable via optional illuminants

item	colour	price
342128	grey	**75,95 €**

220-240 Volt | 1x max. 25 W | E27 | LED

suitable illuminants on page 770-771

PAVONIS & CYGNI

concrete – a timeless companion. In the meantime, the functional and visual advantages of this ubiquitous material have also reached the lighting industry. Due to the stability of concrete, even large luminaires can be built narrowly. Our PAVONIS & CYGNI models combine the timelessly modern concrete look with elegant brass or chrome surfaces.

For this photo, the light sources 180239 for the PAVONIS and 180062 for the CYGNI were used.



PAVONIS

- concrete
- dimensions H x Ø: 199 x 140 mm
- socket H x Ø: 25 x 120 mm
- max. suspension: 1500 mm
- dimmable via optional illuminants

item	colour	price
342103	grey	**65,95 €**
342104	dark grey	**65,95 €**

220-240 Volt | 1x max. 25 W | E27 | T LED

suitable illuminants on page 770-773



CYGNI

- concrete
- dimensions H x Ø: 285 x 400 mm
- socket H x Ø: 25 x 120 mm
- max. suspension: 1500 mm
- dimmable via optional illuminants

item	colour	price
342101	grey	**119,95 €**
342102	dark grey	**119,95 €**

220-240 Volt | 1x max. 25 W | E27 | T LED

suitable illuminants on page 770-773



BASKET

The BASKET Series comprises two decorative pendant lights in different sizes. The name says it: The gracefully built lampshade imitates a basketwork and is fully made of gypsum. Like the color of gypsum, the shade is white coloured and creates a warm and natural light impression.





BASKET

- gypsum
- socket H x Ø: 25 x 100 mm
- max. suspension: 3000 mm
- dimmable via optional illuminants

item	colour	dimensions L x Ø	price
342142	☐ white	101 x 206 mm	**81,95 €**
342143	☐ white	168 x 344 mm	**145,95 €**

220-240 Volt | 1x max. 40 W | E27 | LED

suitable illuminants on page 770-773



TWISTER

Elegant design with innovative details meets exceptional choice of materials: The TWISTER series combines decorative floor, table and pendant luminaires in different sizes, made entirely of plaster. We turn the cable into a design element! Entirely in classic white, the luminaires are only interrupted by a red cable. This makes the TWISTER series an eye-catcher not only in living areas, but also in hotels or restaurants.





suitable
table /
floor lights
page 218
346010
343017

TWISTER I

- Design by Johannes Tomm
- red textile cable
- gypsum
- easy cleaning through surface treatment
- dimensions H x Ø: 185 x 180 mm
- socket H x Ø: 25 x 120 mm
- max. suspension: 3000 mm
- dimmable via optional illuminants

item	colour	price
342144	☐ white	**119,95 €**

220-240 Volt | 1x max. 25 W | E14 | LED

suitable illuminants on page 769





suitable
table /
floor lights
page 218
346010
343017

TWISTER II

- Design by Johannes Tomm
- red textile cable
- gypsum
- easy cleaning through surface treatment
- dimensions H x Ø: 282 x 280 mm
- socket H x Ø: 25 x 120 mm
- max. suspension: 3000 mm
- dimmable via optional illuminants

item	colour	price
342145	☐ white	**169,95 €**

220-240 Volt | 1x max. 40 W | E27 | LED

suitable illuminants on page 770-773





FILO BALL

- metal
- dimensions H x Ø: 160 x 160 mm
- socket H x Ø: 25 x 100 mm
- max. suspension: 1200 mm
- dimmable via optional illuminants

item	colour	price
342029	silver coloured	**74,95 €**
342030	black	**74,95 €**

220-240 Volt | 1x max. 40 W | G9 | LED

suitable illuminants on page 766



FILO MOB

- metal
- dimensions H x Ø: 190 x 190 mm
- socket H x Ø: 25 x 100 mm
- max. suspension: 1200 mm
- dimmable via optional illuminants

item	colour	price
342025	silver coloured	**77,95 €**
342026	black	**77,95 €**

220-240 Volt | 1x max. 60 W | E27 | LED

suitable illuminants on page 770-773






FILO BIG MOB

- metal
- dimensions H x Ø: 300 x 300 mm
- socket H x Ø: 25 x 100 mm
- max. suspension: 1200 mm
- dimmable via optional illuminants

item	colour		price
342027		silver coloured	**169,95 €**
342028		black	**169,95 €**



suitable illuminants on page 770-773





FILO SAT

- metal
- dimensions H x Ø: 180 x 390 mm
- socket H x Ø: 25 x 100 mm
- max. suspension: 1200 mm
- dimmable via optional illuminants

item	colour		price
342031		silver coloured	**179,95 €**
342032		black	**179,95 €**



suitable illuminants on page 770-773

ELECTRA

Could it be any cooler? Sure – ELECTRA! The combination of silver-coloured chrome lampshade and modern LED technology underlines modern interiors and serves as an elegant eye-catcher above tables and other furniture.

But don't worry: with its warm light colour, ELECTRA creates a cosy, warm atmosphere.



ELECTRA

- glass
- dimensions Ø: 115 mm
- socket H x Ø: 25 x 100 mm
- max. suspension: 1200 mm
- dimmable via phase control or phase cut-off

item	colour	colour temperature	light current	price
342116	silver coloured chrome	WW 3000 K	180 lm	**109,95 €**

220-240 Volt | 4 W | 1 LED | Ra>80 | 100° | + –



ELECTRA

- glass
- dimensions Ø: 115 mm
- socket L x B x H: 610 x 75 x 25 mm
- max. suspension: 1200 mm
- dimmable via phase control or phase cut-off

item	colour	colour temperature	light current	price
342117	silver coloured chrome	WW 3000 K	540 lm	**209,95 €**

220-240 Volt | 12 W | 3 LED | Ra>80 | 100° | + –





BUNDA

- glass
- dimensions Ø: 135 mm
- socket H x Ø: 25 x 100 mm
- max. suspension: 1200 mm
- dimmable via optional illuminants

item	colour	price
342114	silver coloured chrome	**64,95 €**

220-240 Volt | 1x max. 28 W | G9 | LED

suitable illuminants on page 766



BUNDA

- glass
- dimensions Ø: 135 mm
- socket L x B x H: 610 x 75 x 25 mm
- max. suspension: 1200 mm
- dimmable via optional illuminants

item	colour	price
342115	silver coloured chrome	**144,95 €**

220-240 Volt | 3x max. 28 W | G9 | LED

suitable illuminants on page 766



FURNEL

The world in a sphere - the FURNEL pendant luminaire fills your your room with a pleasant light and reflects the the surroundings via its mirrored glass surface. Room and luminaire can hardly be brought together in a more natural way.



in the off-state



in the on-state

FURNEL

- glass
- dimensions Ø: 350 mm
- socket H x Ø: 25 x 100 mm
- max. suspension: 1200 mm
- dimmable via optional illuminants

item	colour	price
342109	silver coloured mirrored	**149,95 €**

220-240 Volt | 1x max. 60 W | E27 | LED

suitable illuminants on page 770-773



DIPHDA

Bring the Orient into your home: Are you looking for the final eye-catcher to add the finishing touch to your dignified modern retro interior? With its copper-coloured surface, the DIPHDA sets cultivated light accents that cut an excellent figure in bars and lounges as well as in living areas.


The light sources 180205 for the small and 180060 for the large DIPHDA were used for this photo.




DIPHDA

- glass
- socket H x Ø: 25 x 100 mm
- max. suspension: 1200 mm
- dimmable via optional illuminants

item	colour		dimensions L x Ø	price
342118		silver coloured chrome	1200 x 150 mm	**59,95 €**
342120		copper coloured	1200 x 150 mm	**59,95 €**
342119		silver coloured chrome	1200 x 200 mm	**79,95 €**
342121		copper coloured	1200 x 200 mm	**79,95 €**



suitable illuminants on page 770-773

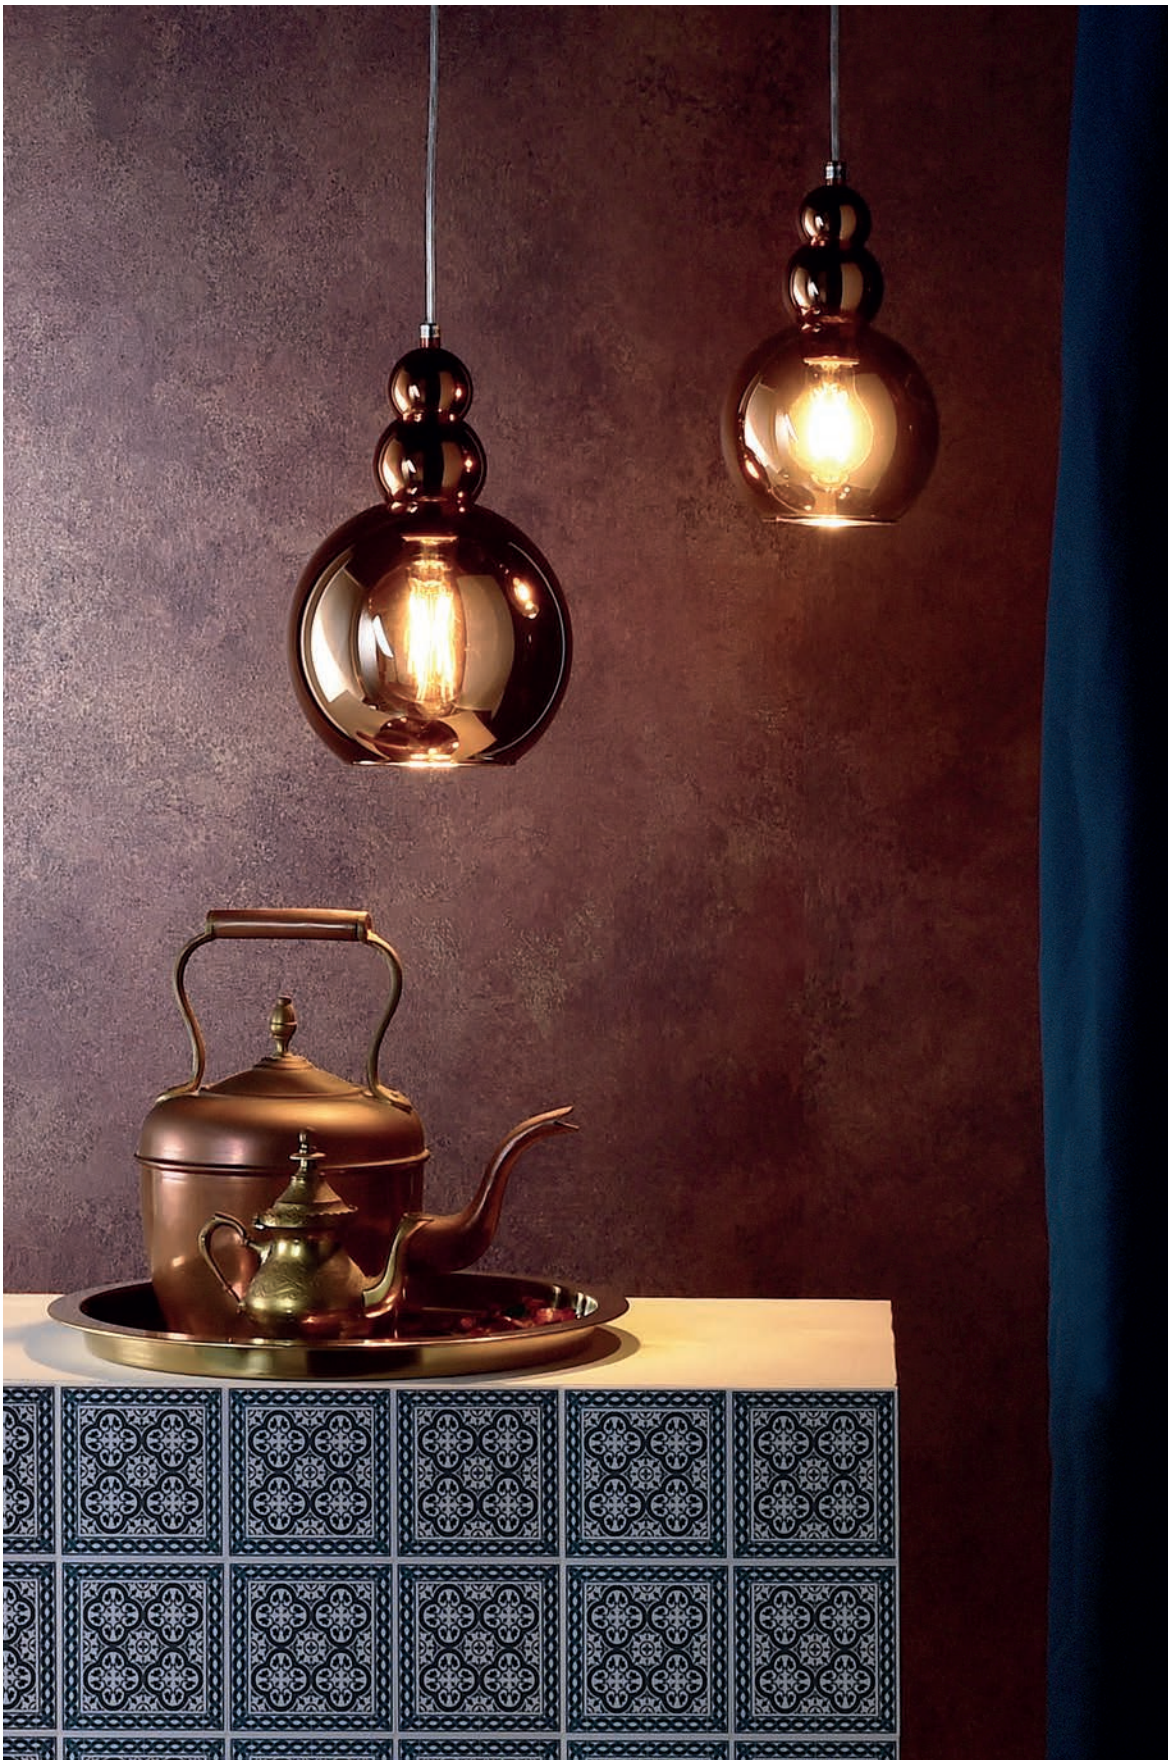

BARREL

Full focus: The BARREL pendant luminaire concentrates entirely on its most important task - illuminating a specific area. This is not least due to the noble metal shade, which ensures glare-free lighting pleasure throughout.

The illuminant 180071 was used for the picture on the right.



BARREL

- metal
- dimensions L x Ø: 250 x 100 mm
- socket H x Ø: 25 x 120 mm
- max. suspension: 1000 mm
- dimmable via optional illuminants

item	colour	price
342049	copper coloured	**69,45 €**
342050	silver coloured satined	**69,45 €**
342051	black	**69,45 €**

220-240 Volt | 1x max. 40 W | E27 | LED

suitable illuminants on page 770-773



BELL

- metal
- dimensions L x Ø: 300 x 300 mm
- socket H x Ø: 25 x 120 mm
- max. suspension: 1000 mm
- dimmable via optional illuminants

item	colour	price
342052	copper coloured	**119,95 €**
342053	silver coloured satined	**119,95 €**
342054	black	**119,95 €**

220-240 Volt | 1x max. 40 W | E27 | LED

suitable illuminants on page 770-773



ANKAA

Step closer, risk a look: The ANKAA pendant luminaire is dominated by timeless metal, which is interrupted by horizontal light slits and in this way not only creates an extraordinary room light, but will also catch the eye of your guests.

The light sources 180060 for the small and 180061 for the large ANKAA were used for this photo.






ANKAA

- metal
- socket H x Ø: 25 x 120 mm
- max. suspension: 1175/1195 mm
- dimmable via optional illuminants

item	colour		dimensions L x Ø	price
342137	☐	stainless steel brushed	1400 x 200 mm	**89,95 €**
342138	☐	stainless steel brushed	1500 x 280 mm	**129,95 €**



suitable illuminants on page 770-773





new from 2023




MENKAR 400 + 600

- timeless, minimalist design
- high light current [indirect light component ca. 15 - 20%]
- aluminium
- socket H x Ø: 30 x 100 mm
- max. suspension: 1800 mm
- light colour adjustable via dip switch
- dimmable via phase control or phase cut-off



suitable ceiling lights page 59
348198-348205

item	colour	colour temperature	light current	dimensions H x Ø	power	light source	price
342201	white	WW NW 3000/4000 K	3100/3200 lm	60 x 400 mm	43 W	224 LED	**239,95 €**
342203	silver brushed	WW NW 3000/4000 K	3100/3200 lm	60 x 400 mm	43 W	224 LED	**239,95 €**
342204	coffee brushed	WW NW 3000/4000 K	3100/3200 lm	60 x 400 mm	43 W	224 LED	**239,95 €**
342202	black	WW NW 3000/4000 K	3100/3200 lm	60 x 400 mm	43 W	224 LED	**239,95 €**
342205	white	WW NW 3000/4000 K	5500/5600 lm	60 x 600 mm	65 W	400 LED	**399,95 €**
342207	silver brushed	WW NW 3000/4000 K	5500/5600 lm	60 x 600 mm	65 W	400 LED	**399,95 €**
342208	coffee brushed	WW NW 3000/4000 K	5500/5600 lm	60 x 600 mm	65 W	400 LED	**399,95 €**
342206	black	WW NW 3000/4000 K	5500/5600 lm	60 x 600 mm	65 W	400 LED	**399,95 €**




MENKAR 800

- timeless, minimalist design
- high light current [indirect light component ca. 15 - 20%]
- aluminium
- socket H x Ø: 30 x 100 mm
- max. suspension: 3000 mm
- light colour adjustable via dip switch
- dimmable via phase control or phase cut-off



suitable ceiling lights page 59
348206-348209

item	colour	colour temperature	light current	dimensions H x Ø	power	light source	price
342209	white	WW NW 3000/4000 K	7600/7800 lm	60 x 800 mm	95 W	576 LED	**559,95 €**
342211	silver brushed	WW NW 3000/4000 K	7600/7800 lm	60 x 800 mm	95 W	576 LED	**559,95 €**
342212	coffee brushed	WW NW 3000/4000 K	7600/7800 lm	60 x 800 mm	95 W	576 LED	**559,95 €**
342210	black	WW NW 3000/4000 K	7600/7800 lm	60 x 800 mm	95 W	576 LED	**559,95 €**





MEROPE

The pendant lights of the MEROPE Series unite timeless elegance and reduced modernity. Available diameters are 400, 600 and 800mm and the light colour [3000K/4000K] can be chosen with a switch before mounting. The outer ring is finished in white, silver, coffee brown or black.

new from 2023




MEROPE 400 + 600

- timeless, minimalist design
- high light current
- aluminium
- socket H x Ø: 65 x 220 mm
- max. suspension: 1800 mm
- light colour adjustable via dip switch
- dimmable via phase control or phase cut-off



suitable ceiling lights page 61
348186-348193

item	colour	colour temperature	light current	dimensions H x Ø	power	light source	price
342189	white	WW NW 3000/4000 K	2100/2200 lm	35 x 380 mm	30 W	144 LED	**209,95 €**
342191	silver brushed	WW NW 3000/4000 K	2100/2200 lm	35 x 380 mm	30 W	144 LED	**209,95 €**
342192	coffee brushed	WW NW 3000/4000 K	2100/2200 lm	35 x 380 mm	30 W	144 LED	**209,95 €**
342190	black	WW NW 3000/4000 K	2100/2200 lm	35 x 380 mm	30 W	144 LED	**209,95 €**
342193	white	WW NW 3000/4000 K	3100/3200 lm	35 x 580 mm	42 W	240 LED	**279,95 €**
342195	silver brushed	WW NW 3000/4000 K	3100/3200 lm	35 x 580 mm	42 W	240 LED	**279,95 €**
342196	coffee brushed	WW NW 3000/4000 K	3100/3200 lm	35 x 580 mm	42 W	240 LED	**279,95 €**
342194	black	WW NW 3000/4000 K	3100/3200 lm	35 x 580 mm	42 W	240 LED	**279,95 €**




MEROPE 800

- timeless, minimalist design
- high light current
- aluminium
- socket H x Ø: 65 x 275 mm
- max. suspension: 3000 mm
- light colour adjustable via dip switch
- dimmable via phase control or phase cut-off



suitable ceiling lights page 61
348194-348197

item	colour	colour temperature	light current	dimensions H x Ø	power	light source	price
342197	white	WW NW 3000/4000 K	4800/4900 lm	35 x 780 mm	60 W	384 LED	**469,95 €**
342199	silver brushed	WW NW 3000/4000 K	4800/4900 lm	35 x 780 mm	60 W	384 LED	**469,95 €**
342200	coffee brushed	WW NW 3000/4000 K	4800/4900 lm	35 x 780 mm	60 W	384 LED	**469,95 €**
342198	black	WW NW 3000/4000 K	4800/4900 lm	35 x 780 mm	60 W	384 LED	**469,95 €**





new from 2023







SCULPTORIS 400 + 600

- timeless, minimalist design
- high light current
- aluminium
- socket H x Ø: 65 x 220 mm
- max. suspension: 1800 mm
- light colour adjustable via dip switch
- dimmable via phase control or phase cut-off



suitable
ceiling lights
page 63
348180-348183

item	colour	colour temperature	light current	dimensions H x Ø	power	light source	price
342183	white	WW NW 3000/4000 K	1900/2000 lm	85 x 400 mm	30 W	168 LED	**289,95 €**
342184	black	WW NW 3000/4000 K	1900/2000 lm	85 x 400 mm	30 W	168 LED	**289,95 €**
342185	white	WW NW 3000/4000 K	3000/3100 lm	110 x 600 mm	42 W	240 LED	**369,95 €**
342186	black	WW NW 3000/4000 K	3000/3100 lm	110 x 600 mm	42 W	240 LED	**369,95 €**

220-240 Volt | SMD | Ra>80

SCULPTORIS 800

- timeless, minimalist design
- high light current
- aluminium
- socket H x Ø: 65 x 275 mm
- max. suspension: 3000 mm
- light colour adjustable via dip switch
- dimmable via phase control or phase cut-off



suitable
ceiling lights
page 63
348184
348185

item	colour	colour temperature	light current	dimensions H x Ø	power	light source	price
342187	white	WW NW 3000/4000 K	4000/4100 lm	110 x 800 mm	60 W	384 LED	**569,95 €**
342188	black	WW NW 3000/4000 K	4000/4100 lm	110 x 800 mm	60 W	384 LED	**569,95 €**

220-240 Volt | SMD | Ra>80



APOLLON

The slim and purist pendant lamp APOLLON fits seamlessly into almost any ambience and provides a rich warm white light in addition to the noble look. The APOLLON is available in two different sizes with a matte surface in black and white.







view from above




view from below

APOLLON

- slim, noble design
- high colour rendition [Ra >90]
- aluminium
- socket L x B x H: 650/850 x 35 x 48 mm
- max. suspension: 3000 mm
- dimmable via phase control or phase cut-off

item	colour		colour temperature		light current	dimensions L x B x H	power	price
342149	☐	white	ww	2700 K	1755 lm	1004 x 80 x 8 mm	28 W	**319,95 €**
342148	■	black	ww	2700 K	1755 lm	1004 x 80 x 8 mm	28 W	**319,95 €**
342151	☐	white	ww	2700 K	2475 lm	1464 x 80 x 8 mm	42 W	**429,95 €**
342150	■	black	ww	2700 K	2475 lm	1464 x 80 x 8 mm	42 W	**429,95 €**



MADERA

The MADERA series is made of first-class European oak wood and impresses with its modern design and mix of materials in private living areas, hotels, restaurants and much more. The noble MADERA luminaires distribute their powerful warm white light in every room and thus also cut an excellent figure as functional and high-quality lighting at reception counters and co.





touch sensor



suitable
ceiling lights
page 89
348147



suitable
wall light
page 196
341248



suitable
table /
floor lights
page 220
346044
343031

MADERA

- modern, exclusive design
- made in Europe from high-quality oak wood of quality class A
- FSC-certified raw material oak wood
- environmentally friendly packaging
- infinitely dimmable via touch sensor
- oak wood | aluminium
- dimensions L x B x H: 900 x 40 x 60 mm
- socket L x B x H: 370 x 50 x 30 mm
- max. suspension: 1000 mm

item	colour	colour temperature	light current	price
342169	wood, black	ww 3000 K	1190 lm	**449,95 €**

220-240 Volt | 14 W | LED | Ra>80 | + −





page 52



page 55



page 56



page 57



page 59



page 61



page 63



page 64



page 64



page 67



page 67



page 69



page 70



page 70



page 71



page 72



page 72



page 73



page 74



page 74



page 75

surface mounted ceiling lights



page 76



page 76



page 77



page 78



page 78



page 79



page 80



page 80



page 81



page 82



page 82



page 83



from page 84



from page 86



page 89

ORBIT


The ORBIT is a modern surface-mounted ceiling luminaire that offers more than is apparent at first glance. In addition to its high light output [optionally in warm white or newtral white] and a 360'° beam angle for perfect area illumination, the ORBIT can be converted into a chic pendant luminaire via an optional wire suspension. For those who need even more flexibility, the ORBIT can be combined with the ZANIAH series, which is also new.



ORBIT


- modern design
- high light current
- can be converted into a pendant luminaire
- plastic
- dimensions H x Ø: 45 x 350 mm
- socket H x Ø: 40 x 200 mm
- dimmable via phase control or phase cut-off

item	colour		colour temperature		light current	price
401009	☐	white	WW	3000 K	1650 lm	**179,95 €**
401010	☐	white	NW	4000 K	1760 lm	**179,95 €**



optionales accessories

930647 ☐ canopy with rope suspension **24,94 €**

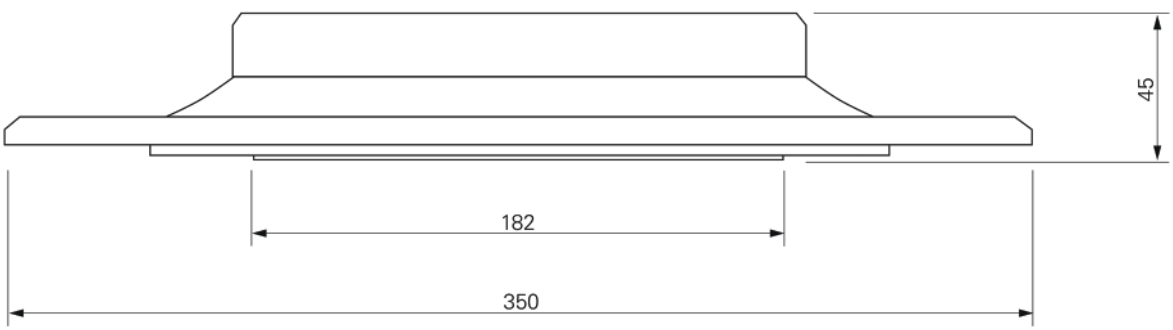





ZANIAH

While most surface-mounted ceiling luminaires focus on flat surfaces and covers, the ZANIAH deliberately places its 360° light source [optionally available as 12W, 18W and 24W versions] in the foreground. This is not only for optical reasons, because the ZANIAH can be combined with the covers of the ORBIT series, which is also new. In this way, not only are different RAL colours available – the ZANIAH itself is also available in eight colour variants per power class.




ZANIAH 12W

- modern design
- interchangeable covers in eight colours
- aluminium
- dimensions H x Ø: 42 x 290 mm
- dimmable via phase control or phase cut-off

item	colour	colour temperature	light current	price
620040	white	ww 3000 K	1500 lm	**114,95 €**
620033	silver coloured	ww 3000 K	1500 lm	**114,95 €**
620038	grey	ww 3000 K	1500 lm	**114,95 €**
620039	black	ww 3000 K	1500 lm	**114,95 €**
620036	red	ww 3000 K	1500 lm	**114,95 €**
620037	yellow	ww 3000 K	1500 lm	**114,95 €**
620034	blue	ww 3000 K	1500 lm	**114,95 €**
620035	green	ww 3000 K	1500 lm	**114,95 €**



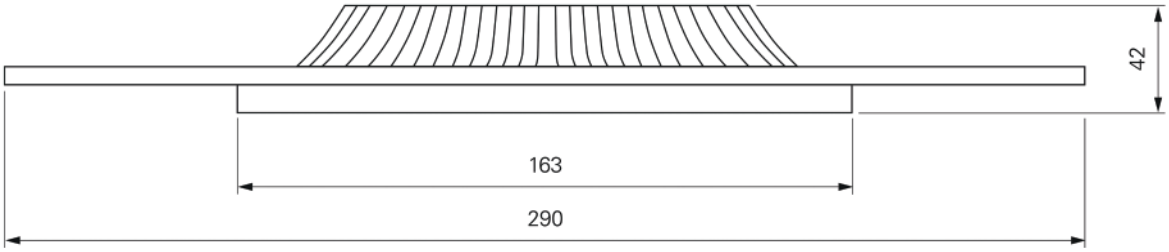




ZANIAH 18W

- modern design
- interchangeable covers in eight colours
- aluminium
- dimensions H x Ø: 46 x 370 mm
- dimmable via phase control or phase cut-off

item	colour	colour temperature	light current	price
620048	white	ww 3000 K	2000 lm	**124,95 €**
620041	silver coloured	ww 3000 K	2000 lm	**124,95 €**
620046	grey	ww 3000 K	2000 lm	**124,95 €**
620047	black	ww 3000 K	2000 lm	**124,95 €**
620044	red	ww 3000 K	2000 lm	**124,95 €**
620045	yellow	ww 3000 K	2000 lm	**124,95 €**
620042	blue	ww 3000 K	2000 lm	**124,95 €**
620043	green	ww 3000 K	2000 lm	**124,95 €**



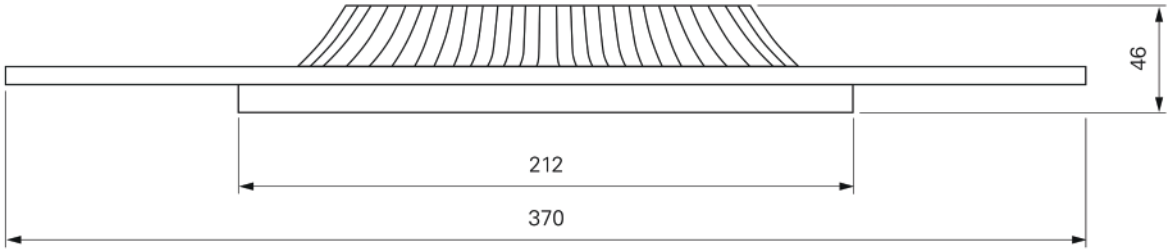




ZANIAH 24W

- modern design
- interchangeable covers in eight colours
- aluminium
- dimensions H x Ø: 46 x 420 mm
- dimmable via phase control or phase cut-off

item	colour	colour temperature	light current	price
620056	white	ww 3000 K	2560 lm	**134,95 €**
620049	silver coloured	ww 3000 K	2560 lm	**134,95 €**
620054	grey	ww 3000 K	2560 lm	**134,95 €**
620055	black	ww 3000 K	2560 lm	**134,95 €**
620052	red	ww 3000 K	2560 lm	**134,95 €**
620053	yellow	ww 3000 K	2560 lm	**134,95 €**
620050	blue	ww 3000 K	2560 lm	**134,95 €**
620051	green	ww 3000 K	2560 lm	**134,95 €**



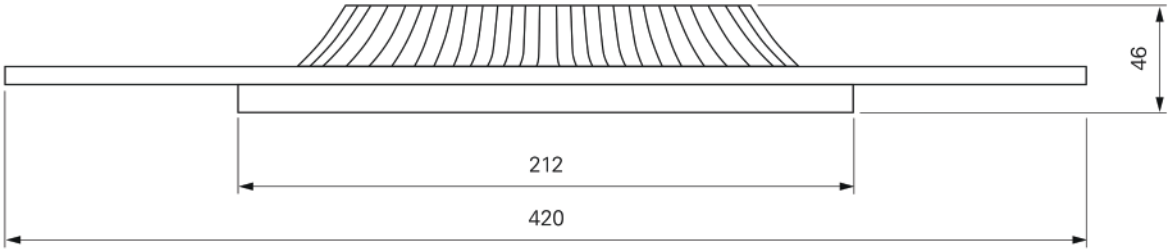



MENKAR

The ceiling lamps of the MENKAR series can be combined great with the MEROPE series – as the come out of the same family. Just like the MEROPE, the MENKAR comes with a fine finished outer ring made of aluminum in white, silver, coffee brown or black colour.

new from 2023

Lumen+









MENKAR 400 + 600 + 800

- timeless design
- high light current [indirect light component ca. 15 - 20%]
- aluminium
- light colour adjustable via dip switch
- dimmable via phase control or phase cut-off



suitable
pendant lights
page 39
342201-342212

item	colour	colour temperature	light current	dimensions H x Ø	power	light source	price
348198	white	WW NW 3000/4000 K	3100/3200 lm	90 x 400 mm	43 W	224 LED	**219,95 €**
348200	silver brushed	WW NW 3000/4000 K	3100/3200 lm	90 x 400 mm	43 W	224 LED	**219,95 €**
348201	coffee brushed	WW NW 3000/4000 K	3100/3200 lm	90 x 400 mm	43 W	224 LED	**219,95 €**
348199	black	WW NW 3000/4000 K	3100/3200 lm	90 x 400 mm	43 W	224 LED	**219,95 €**
348202	white	WW NW 3000/4000 K	5500/5600 lm	90 x 600 mm	65 W	400 LED	**379,95 €**
348204	silver brushed	WW NW 3000/4000 K	5500/5600 lm	90 x 600 mm	65 W	400 LED	**379,95 €**
348205	coffee brushed	WW NW 3000/4000 K	5500/5600 lm	90 x 600 mm	65 W	400 LED	**379,95 €**
348203	black	WW NW 3000/4000 K	5500/5600 lm	90 x 600 mm	65 W	400 LED	**379,95 €**
348206	white	WW NW 3000/4000 K	7600/7800 lm	90 x 800 mm	95 W	576 LED	**539,95 €**
348208	silver brushed	WW NW 3000/4000 K	7600/7800 lm	90 x 800 mm	95 W	576 LED	**539,95 €**
348209	coffee brushed	WW NW 3000/4000 K	7600/7800 lm	90 x 800 mm	95 W	576 LED	**539,95 €**
348207	black	WW NW 3000/4000 K	7600/7800 lm	90 x 800 mm	95 W	576 LED	**539,95 €**

220-240 Volt | SMD | Ra>80 | + −



MEROPE

The absolutely timeless MEROPE satisfies not only with the high light current or the very small mounting dimension, but is also an eyecatcher with the elegant outer aluminum ring. Yout got the choice between sanddblasted surface in white or black or brushed surface in silver or trending colour coffee brown finish. Because of the three different sizes 380, 580 or 780mm, the MEROPE fits even more flexible in different surroundings.

new from 2023



MEROPE 400 + 600 + 800

- timeless design
- high light current
- aluminium
- light colour adjustable via dip switch
- dimmable via phase control or phase cut-off



suitable
pendant lights
page 41
342189-342200

item	colour	colour temperature	light current	dimensions H x Ø	power	light source	price
348186	white	WW NW 3000/4000 K	2100/2200 lm	60 x 380 mm	30 W	144 LED	**189,95 €**
348188	silver brushed	WW NW 3000/4000 K	2100/2200 lm	60 x 380 mm	30 W	144 LED	**189,95 €**
348189	coffee brushed	WW NW 3000/4000 K	2100/2200 lm	60 x 380 mm	30 W	144 LED	**189,95 €**
348187	black	WW NW 3000/4000 K	2100/2200 lm	60 x 380 mm	30 W	144 LED	**189,95 €**
348190	white	WW NW 3000/4000 K	3100/3200 lm	60 x 580 mm	42 W	240 LED	**259,95 €**
348192	silver brushed	WW NW 3000/4000 K	3100/3200 lm	60 x 580 mm	42 W	240 LED	**259,95 €**
348193	coffee brushed	WW NW 3000/4000 K	3100/3200 lm	60 x 580 mm	42 W	240 LED	**259,95 €**
348191	black	WW NW 3000/4000 K	3100/3200 lm	60 x 580 mm	42 W	240 LED	**259,95 €**
348194	white	WW NW 3000/4000 K	4800/4900 lm	60 x 780 mm	60 W	384 LED	**449,95 €**
348196	silver brushed	WW NW 3000/4000 K	4800/4900 lm	60 x 780 mm	60 W	384 LED	**449,95 €**
348197	coffee brushed	WW NW 3000/4000 K	4800/4900 lm	60 x 780 mm	60 W	384 LED	**449,95 €**
348195	black	WW NW 3000/4000 K	4800/4900 lm	60 x 780 mm	60 W	384 LED	**449,95 €**

220-240 Volt | SMD | Ra>80 | + −



Mit freundlicher Unterstützung von Regionaldirektion für Deutsche Vermögensberatung Pierre Werner / Direktion für Deutsche Vermögensberatung Uwe Liebholz

SCULPTORIS

Thanks to its different versions, the SCULPTORIS series can be optimally integrated both in the bedroom as a surface ounted ceiling luminaire and in the living or dining area as a pendant luminaire.

product video

new from 2023





SCULPTORIS 400 + 600 + 800

- timeless, minimalist design
- high light current
- aluminium
- light colour adjustable via dip switch
- dimmable via phase control or phase cut-off



suitable
pendant
lights
page 43
342183-342188

item	colour	colour temperature	light current	dimensions H x Ø	power	light source	price
348180	white	WW NW 3000/4000 K	1900/2000 lm	100 x 400 mm	30 W	168 LED	**269,95 €**
348181	black	WW NW 3000/4000 K	1900/2000 lm	100 x 400 mm	30 W	168 LED	**269,95 €**
348182	white	WW NW 3000/4000 K	3000/3100 lm	130 x 600 mm	42 W	240 LED	**349,95 €**
348183	black	WW NW 3000/4000 K	3000/3100 lm	130 x 600 mm	42 W	240 LED	**349,95 €**
348184	white	WW NW 3000/4000 K	4000/4100 lm	130 x 800 mm	60 W	384 LED	**549,95 €**
348185	black	WW NW 3000/4000 K	4000/4100 lm	130 x 800 mm	60 W	384 LED	**549,95 €**

220-240 Volt | SMD | Ra>80 | + –



HELEN I 3 COLOUR

- plastic
- dimensions H x Ø: 83 x 276 mm
- socket H x Ø: 20 x 251 mm
- light colour adjustable via dip switch

item	colour	colour temperature	light current	price
348051	silver coloured brushed	WW NW CW 3000/4000/5500 K	1400 lm	**84,95 €**

220-240 Volt | 15 W | SMD | 84 LED | Ra>80 | 115° | IP54



HELEN II 3 COLOUR

- plastic
- dimensions H x Ø: 89 x 351 mm
- socket H x Ø: 22 x 326 mm
- light colour adjustable via dip switch

item	colour	colour temperature	light current	price
348052	silver coloured brushed	WW NW CW 3000/4000/5500 K	1800 lm	**109,95 €**

220-240 Volt | 19 W | SMD | 120 LED | Ra>80 | 115° | IP54





ALTAIS

It takes a lot to bring the ALTAIS series into embarrassment. Thanks to IP54 and impact resistance class IK10, the outdoor luminaires are convincing as slim all-rounders in both public and private areas. The ALTAIS luminaires offer additional flexibility thanks to their integrated motion sensor (programmable via the remote control supplied) and the adjustable light colour for different lighting scenarios.

product video







ALTAIS

- light colour adjustable via dip switch
- plastic

item	colour	colour temperature	light current	dimensions H x Ø	power	price
348141	white	WW NW CW 3000/4000/6000 K	1260 lm	48 x 220 mm	12W	**69,95 €**
348143	white	WW NW CW 3000/4000/6000 K	1870 lm	48 x 280 mm	18W	**79,95 €**
348145	white	WW NW CW 3000/4000/6000 K	2715 lm	48 x 330 mm	25W	**99,95 €**

220-240 Volt | SMD | LED | Ra>85 | 120° | IP54 | IK10



ALTAIS MOTION

- light colour adjustable via dip switch
- detection area, daylight sensor and light duration can be individualised via remote control
- plastic
- incl. remote control
- incl. motion sensor

item	colour	colour temperature	light current	dimensions H x Ø	power	price
348142	white	WW NW CW 3000/4000/6000 K	1260 lm	48 x 220 mm	12W	**105,95 €**
348144	white	WW NW CW 3000/4000/6000 K	1870 lm	48 x 280 mm	18W	**119,95 €**
348146	white	WW NW CW 3000/4000/6000 K	2715 lm	48 x 330 mm	25W	**139,95 €**

220-240 Volt | SMD | LED | Ra>85 | 120° | IP54 | IK10



SUBRA

Our new SUBRA lamps can be mounted on the wall just like the ceiling and convince with the slim silhouette. This is not only because of the small installation height of 7cm, but also the orbital light ring which is an additional design element. When it comes to dimming, the SUBRA is even more subtle. You got the choice between the analog TRIAC or the digital DALI version. And there is another version with an adjustable motion sensor.

product video






safe assembly thanks to safety rope

SUBRA

- classic design with illuminated stripe as highlight
- easy mounting by means of clip connection
- high light current
- IP54 ceiling mounting / IP20 wall mounting
- aluminium
- dimensions H x Ø: 70 x 350 mm
- socket H x Ø: 22 x 290 mm

item	colour	colour temperature	light current	power	control	price
401007	☐ white	WW 3000 K	2600 lm	28,50 W	TRIAC	**249,95 €**
401008	☐ white	NW 4000 K	2840 lm	28,50 W	TRIAC	**249,95 €**
401005	☐ white	WW 3000 K	2603 lm	28,70 W	motion sensor	**299,95 €**
401006	☐ white	NW 4000 K	2651 lm	28,70 W	motion sensor	**299,95 €**
401003	☐ white	WW 3000 K	2636 lm	28,90 W	DALI	**324,95 €**
401004	☐ white	NW 4000 K	2671 lm	28,90 W	DALI	**324,95 €**

220-240 Volt | SMD | 344 LED | Ra>80 | 110° | + – | IP54 | IK10

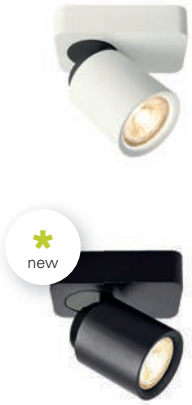

LIBRAE LINEAR I

- aluminium
- luminaire L x Ø: 110 x 65 mm
- socket: 122 x 72 x 30 mm
- dimmable via optional illuminants

item	colour	price
348073	white	**39,95 €**
348170	black	**39,95 €**

220-240 Volt | 1x max. 50 W | GU10 | LED | 90°

suitable illuminants on page 767-768



LIBRAE LINEAR II

- aluminium
- luminaire L x Ø: 110 x 65 mm
- socket: 322 x 72 x 30 mm
- dimmable via optional illuminants

item	colour	price
348074	white	**74,95 €**
348169	black	**74,95 €**

220-240 Volt | 2x max. 50 W | GU10 | LED | 90°

suitable illuminants on page 767-768



LIBRAE LINEAR III

- aluminium
- luminaire L x Ø: 110 x 65 mm
- socket: 542 x 72 x 30 mm
- dimmable via optional illuminants

item	colour	price
348075	white	**109,95 €**
348171	black	**109,95 €**

220-240 Volt | 3x max. 50 W | GU10 | LED | 90°

suitable illuminants on page 767-768







LIBRAE ROUND I

- aluminium
- luminaire H x Ø: 110 x 65 mm
- socket H x Ø: 30 x 102 mm
- dimmable via optional illuminants

item	colour	price
348076	white	**39,95 €**
348172	black	**39,95 €**

220-240 Volt | 1x max. 50 W | GU10 | T LED | 90°

suitable illuminants on page 767-768





LIBRAE ROUND II

- aluminium
- luminaire H x Ø: 110 x 65 mm
- socket H x Ø: 30 x 173 mm
- dimmable via optional illuminants

item	colour	price
348077	white	**74,95 €**
348173	black	**74,95 €**

220-240 Volt | 2x max. 50 W | GU10 | T LED | 90°

suitable illuminants on page 767-768



LIBRAE ROUND III

- aluminium
- luminaire H x Ø: 110 x 65 mm
- socket H x Ø: 30 x 212 mm
- dimmable via optional illuminants

item	colour	price
348078	white	**109,95 €**
348174	black	**109,95 €**

220-240 Volt | 3x max. 50 W | GU10 | LED | 90°

suitable illuminants on page 767-768





INDI I

- aluminium
- luminaire H x Ø: 124 x 100 mm
- socket H x Ø: 25 x 80 mm
- dimmable via optional illuminants

item	colour	price
348085	silver coloured brushed	**32,95 €**

220-240 Volt | 1x max. 50 W | GU10 | LED | 90°

suitable illuminants on page 767-768



INDI II

- aluminium
- luminaire H x Ø: 124 x 172 mm
- socket H x Ø: 25 x 135 mm
- dimmable via optional illuminants

item	colour	price
348086	silver coloured brushed	**59,95 €**

220-240 Volt | 2x max. 50 W | GU10 | LED | 90°


suitable illuminants on page 767-768



INDI III

- aluminium
- luminaire H x Ø: 124 x 250 mm
- socket H x Ø: 25 x 190 mm
- dimmable via optional illuminants

item	colour	price
348087	silver coloured brushed	**89,95 €**



suitable illuminants on page 767-768





UNI II

- aluminium diecast
- luminaire H x Ø: 103 x 100 mm
- socket H x Ø: 14,5 x 96 mm
- dimmable via phase control or phase cut-off

item	colour		colour temperature		light current	price
348124	☐	white	ww	3000 K	670 lm	**149,95 €**
348179	■	black	ww	3000 K	670 lm	**149,95 €**

220-240 Volt | 9 W | COB | 1 LED | Ra>90 | 35° | 90°



suitable power luminaire
page 336
707044
707131



UNI II DOUBLE

- aluminium diecast
- luminaire L x B x H: 212 x 100 x 103 mm
- socket L x B x H: 212 x 20 x 14 mm
- dimmable via phase control or phase cut-off

item	colour		colour temperature		light current	price
348125	☐	white	ww	3000 K	1350 lm	**269,95 €**
348175	■	black	ww	3000 K	1350 lm	**269,95 €**

220-240 Volt | 18 W | COB | 2 LED | Ra>90 | 35° | 90°






UNI II TRIPLE

- aluminium diecast
- luminaire L x B x H: 324 x 100 x 103 mm
- socket L x B x H: 315 x 25 x 14,5 mm
- dimmable via phase control or phase cut-off

item	colour		colour temperature		light current	price
348107	☐	white	ww	3000 K	2150 lm	**379,95 €**
348210	■	black	ww	3000 K	2150 lm	**379,95 €**





accessories für UNI II series

930339	reflector ring black	**11,95 €**
930340	reflector ring gold optics	**11,95 €**
930341	reflector ring chrome	**11,95 €**
930371	reflector ring II black glossy	**10,95 €**
930335	cover backside black	**3,55 €**
930337	cover heatsink black	**3,55 €**
930306	reflector 50°	**10,95 €**
930307	honeycomb filter	**10,95 €**
930308	spread lens 40° | clear/satined	**10,95 €**
930309	softening lens 47° | satined	**10,95 €**
930310	linear spread lens 40°/80° asymmetric | clear/satined	**10,95 €**





UNI II MINI

- aluminium diecast
- luminaire L x Ø: 91 x 75 mm
- socket H x Ø: 44 x 75 mm
- dimmable via phase control or phase cut-off

item	colour		colour temperature		light current	price
348122	☐	white	ww	3000 K	600 lm	**129,95 €**
348178	■	black	ww	3000 K	600 lm	**129,95 €**








UNI II MINI DOUBLE

- aluminium diecast
- luminaire L x B x H: 160 x 75 x 91 mm
- socket L x B x H: 160 x 75 x 44 mm
- dimmable via phase control or phase cut-off

item	colour		colour temperature		light current	price
348123	☐	white	ww	3000 K	980 lm	**209,95 €**
348177	■	black	ww	3000 K	980 lm	**209,95 €**



accessories für UNI II MINI series

930331	reflector ring black	**10,95 €**
930332	reflector ring gold	**10,95 €**
930333	reflector ring chrome	**10,95 €**
930381	reflector ring II black	**10,95 €**
930327	cover backside black	**3,55 €**
930329	cover heatsink black	**3,55 €**






UNI II MAX

- aluminium diecast
- luminaire H x Ø: 128 x 125 mm
- socket H x Ø: 62 x 125 mm
- dimmable via phase control or phase cut-off

item	colour		colour temperature	light current	price
348127	☐	white	ww 3000 K	2410 lm	**259,95 €**
348176	■	black	ww 3000 K	2410 lm	**259,95 €**





accessories für UNI II MAX

930398	reflector ring black	**12,95 €**
930399	reflector ring gold	**14,95 €**
930382	reflector ring II black glossy	**10,95 €**
930394	cover backside black	**10,95 €**
930396	cover heatsink black	**10,95 €**
930390	reflector 24°	**12,95 €**
930392	reflector 50°	**12,95 €**





BENGALA

- aluminium
- luminaire H x Ø: 120 x 96 mm
- socket Ø: 96 mm
- dimmable via optional illuminants

item	colour	price
348023	white	**49,95 €**
122416	silver coloured brushed	**49,95 €**
348022	black	**49,95 €**



suitable illuminants on page 767-768





DATO

- aluminium
- luminaire L x B x H: 96 x 96 x 120 mm
- socket L x B: 96 x 96 mm
- dimmable via optional illuminants

item	colour	price
348025	white	**49,95 €**
122417	silver coloured brushed	**49,95 €**
348024	black	**49,95 €**



suitable illuminants on page 767-768



MONA

- aluminium diecast
- dimmable via optional illuminants

item	colour		dimensions L x B x H	power	price
348001	☐	white	93 x 93 x 120 mm	1x max.50 W	**59,95 €**
348002	■	black	93 x 93 x 120 mm	1x max.50 W	**59,95 €**
348004	☐	white	186 x 93 x 120 mm	2x max.50 W	**119,95 €**
348005	■	black	186 x 93 x 120 mm	2x max.50 W	**119,95 €**



suitable illuminants on page 767-768





SKY LED

- aluminium
- dimensions L x B x H: 105 x 105 x 105 mm
- dimmable via phase cut-off

item	colour	colour temperature	light current	price
348013	white	ww 3000 K	770 lm	**134,95 €**

220-240 Volt | 10 W | 18 LED | Ra>80 | 90° | + –





NAOS

- concrete
- socket L x B x H: 60 x 40 x 45 mm
- dimmable via optional illuminants

item	colour	dimensions L x B x H / H x Ø	price
348048	grey	70 x 70 x 112 mm	**79,95 €**
348049	grey	112 x 70 mm	**79,95 €**

220-240 Volt | 1x max. 25 W | GU10 | LED

suitable illuminants on page 767-768

DRACONIS

The DRACONIS series from DEKO-LIGHT enables the flexible ceiling lighting for a wide range of applications in the industrial, commercial and logistics sectors. The DRACONIS luminaire is for the optional use as a surface-mounted ceiling luminaire or in a 3-phase track system. The power [45, 55 or 72 W] and light colour [2,700, 3,500 or 4,000 K] can be adjusted via a switch on the back of the housing. In order to integrate the DRACONIS in almost any environment, we offer several lenses for asymmetrical or symmetrical illumination in different beam angles. The maximum light current is 8,215 lumens.





DRACONIS

- light colour and output adjustable via dip switch
- high light current [bis 8200 lm]
- aluminium diecast
- dimensions L x B x H: 578 x 189 x 71 mm
- socket L x B x H: 102 x 88 x 25 mm

item	colour		colour temperature	light current	price
348128		white	WW NW 2700 / 3500 / 4000 K	8215 lm	**279,95 €**
348099		aluminium	WW NW 2700 / 3500 / 4000 K	8215 lm	**279,95 €**

220-240 50Hz Volt | 45W/ 55W/ 72W | SMD | 198 LED | Ra>80 | 60°



suitable power luminaires
page 322
620120
620119



accessories

930577	15° lens | asymmetric	**9,95 €**
930544	20° lens | symmetric	**9,95 €**
930545	30° lens | symmetric	**9,95 €**
930546	90° lens | symmetric	**9,95 €**





LUCEA 10

- aluminium diecast
- dimensions H x Ø: 157 x 65 mm
- dimmable via phase control or phase cut-off
- light colour adjustable via dip switch

item	colour		colour temperature	light current	price
348153	☐	white	WW NW 3000 / 4000 K	930 / 1000 lm	**119,95 €**
348154	■	black	WW NW 3000 / 4000 K	930 / 1000 lm	**119,95 €**

220-240 Volt | 10 W | 1 LED | Ra>90 | 36°

accessories

930679 lens 24° **9,95 €**





suitable pendant lights page 13
342177
342178




suitable power luminaires from page 332
707116
707117
707124
707125



LUCEA 15 + 20

- aluminium diecast
- dimensions H x Ø: 178 x 85 mm
- dimmable via phase control or phase cut-off
- light colour adjustable via dip switch

item	colour		colour temperature	light current	power	price
348155	☐	white	WW NW 3000 / 4000 K	1460 / 1500 lm	15 W	**139,95 €**
348156	■	black	WW NW 3000 / 4000 K	1460 / 1500 lm	15 W	**139,95 €**
348157	☐	white	WW NW 3000 / 4000 K	1930 / 2000 lm	20 W	**159,95 €**
348158	■	black	WW NW 3000 / 4000 K	1930 / 2000 lm	20 W	**159,95 €**



accessories

930680	lens 24°	**12,95 €**
930681	lens 60°	**12,95 €**





suitable pendant lights page 13
342179-342182



suitable power luminaires from page 333
707118-707121
707126-707129



LUCEA 30

- aluminium diecast
- dimensions H x Ø: 211 x 100 mm
- dimmable via phase control or phase cut-off
- light colour adjustable via dip switch

item	colour		colour temperature	light current	price
348159	☐	white	WW NW 3000 / 4000 K	2700 / 2900 lm	**179,95 €**
348160	■	black	WW NW 3000 / 4000 K	2700 / 2900 lm	**179,95 €**



accessories

930682	lens 24°	**15,95 €**
930684	lens 60°	**15,95 €**





suitable power luminaires page 333
707122
707123








LUCEA 10

- aluminium diecast
- dimensions H x Ø: 218 x 65 mm
- socket H x Ø: 29 x 104,5 mm
- dimmable via phase control or phase cut-off
- light colour adjustable via dip switch

item	colour		colour temperature	light current	price
348161	☐	white	WW NW 3000 / 4000 K	930 / 1000 lm	**129,95 €**
348162	■	black	WW NW 3000 / 4000 K	930 / 1000 lm	**129,95 €**



accessories

930679 lens 24° **9,95 €**





suitable pendant lights page 13
342177
342178



suitable power luminaires from page 332
707116
707117
707124
707125






LUCEA 15 + 20

- aluminium diecast
- dimensions H x Ø: 241 x 85 mm
- socket H x Ø: 29 x 104,5 mm
- dimmable via phase control or phase cut-off
- light colour adjustable via dip switch

item	colour		colour temperature	light current	power	price
348163	☐	white	WW NW 3000 / 4000 K	1460 / 1500 lm	15 W	**149,95 €**
348164	■	black	WW NW 3000 / 4000 K	1460 / 1500 lm	15 W	**149,95 €**
348165	☐	white	WW NW 3000 / 4000 K	1930 / 2000 lm	20 W	**169,95 €**
348166	■	black	WW NW 3000 / 4000 K	1930 / 2000 lm	20 W	**169,95 €**





suitable pendant lights page 13
342179-342182



suitable power luminaires from page 333
707118-707121
707126-707129

accessories

930680	lens 24°	**12,95 €**
930681	lens 60°	**12,95 €**








LUCEA 30

- aluminium diecast
- dimensions H x Ø: 274 x 100 mm
- socket H x Ø: 29 x 104,5 mm
- dimmable via phase control or phase cut-off
- light colour adjustable via dip switch

item	colour		colour temperature	light current	price
348167	☐	white	WW NW 3000 / 4000 K	2700 / 2900 lm	**189,95 €**
348168	■	black	WW NW 3000 / 4000 K	2700 / 2900 lm	**189,95 €**





suitable power luminaires page 333
707122
707123

accessories

930682	lens 24°	**15,95 €**
930684	lens 60°	**15,95 €**





MADERA

The MADERA series is made of first-class European oak wood and impresses with its modern design and mix of materials in private living areas, hotels, restaurants and many more. The noble MADERA luminaires distribute their powerful warm white light in any room and thus also cut an excellent figure as functional and high-quality lighting at reception counters and more.





MADERA

- modern, exclusive design
- from high-quality oak wood of grade A
- FSC-certified raw material oak wood
- environmentally friendly packaging
- oak wood | aluminium
- dimensions L x B x H: 810 x 135 x 110 mm
- socket L x B x H: 250 x 135 x 30 mm

item	colour	colour temperature	light current	price
348147	wood, black	ww 3000 K	1120 lm	**439,95 €**

220-240 Volt | 14 W | LED | Ra>80



suitable
Pendelleuchte
page 46
342169



suitable
wall light
page 196
341248



suitable
table /
floor lights
page 220
346044
343031



page 94



page 94



page 95



page 95



page 96



page 97



page 97



page 98



page 99



page 99



page 99



page 100



page 101



page 102



page 102



page 103



page 103



page 103



page 104



page 104



page 105



page 105



page 106



page 106

built in ceiling lights



page 106



page 107



page 107



page 108



from page 111



from page 114



page 116



page 142



from page 118



page 120



page 120



page 121



page 121



page 123



page 123



page 124



page 125



page 126



page 126



page 127



page 128



page 129



page 129



page 130



page 130



page 131



page 131



page 132



page 133



page 134



page 135



from page 136



page 138



from page 139



from page 140



from page 142



from page 144



from page 146



from page 148



CEILING BUILT-IN RING

- metal
- dimensions H x Ø: 34 x89 mm
- dimmable via optional illuminants

item	colour	price
686868	white	**9,95 €**
686869	silver coloured chrome	**9,95 €**
686871	silver coloured brushed	**9,95 €**
686880	aluminium	**9,95 €**
686867	copper coloured	**9,95 €**
686864	black	**9,95 €**

CV | 12 Volt | 1x max. 50 W | GU5.3 / MR16 | LED | 30° | 68 | 65

accessories

829063 safety spacer **6,95 €**

suitable illuminants on page 765



CEILING BUILT-IN RING GU10

- metal
- dimensions Ø: 89 mm
- dimmable via optional illuminants

item	colour	price
110032	white	**15,95 €**
110033	silver coloured chrome	**15,95 €**
110034	silver coloured brushed	**15,95 €**
110035	aluminium	**15,95 €**
110036	copper coloured	**15,95 €**
110037	black	**15,95 €**

230 Volt | 35 W | GU10 | LED | 30° | 68 | 140



accessories

829063 safety spacer **6,95 €**

suitable illuminants on page 767-768





CEILING BUILT-IN RING

- aluminium diecast
- dimensions H x Ø: 27 x 81 mm
- dimmable via optional illuminants

item	colour	price
449200	white	**12,95 €**
449201	silver coloured chrome	**12,95 €**
449202	silver coloured brushed	**12,95 €**

CV | 12 Volt | 1x max. 50 W | GU5.3 / MR16 | LED | 30° | 68 | 65

accessories

829063	safety spacer	**6,95 €**

suitable illuminants on page 765



CEILING BUILT-IN RING

- aluminium
- dimensions H x Ø: 26 x 92 mm
- dimmable via optional illuminants

item	colour	price
110222	silver coloured	**17,95 €**

CV | 12 Volt | 1x max. 50 W | GU5.3 / MR16 | LED | 35° | 80 | 75

accessories

829063	safety spacer	**6,95 €**

suitable illuminants on page 765





CEILING BUILT-IN RING

- aluminium diecast
- dimensions L x B x H: 82 x 82 x 27 mm
- dimmable via optional illuminants

item	colour		price
449210	☐	white	**12,95 €**
449211	☐	silver coloured chrome	**12,95 €**
449212	☐	silver coloured brushed	**12,95 €**



accessories

829063	safety spacer	**6,95 €**

suitable illuminants on page 765



With the kind support of Göbel's Schlosshotel / 36289 Friedewald





ALIOTH ROUND

- aluminium diecast
- dimensions H x Ø: 25 x 85 mm
- dimmable via optional illuminants

item	colour	price
110027	white	**16,95 €**
110028	silver coloured	**16,95 €**

12 Volt | 1x max 50 W | MR16 GU5,3 | LED | 30° | 68

accessories

829063 safety spacer **6,95 €**

suitable illuminants on page 765





ALIOTH ANGULAR

- aluminium diecast
- dimensions L x B : 90 x 90 mm
- dimmable via optional illuminants

item	colour	price
110029	white	**16,95 €**
110030	silver coloured	**16,95 €**

12 Volt | 1x max 50 W | MR16 GU5,3 | LED | 30° | 68

accessories

829063 safety spacer **6,95 €**


suitable illuminants on page 765



CEILING BUILT-IN RING

- aluminium diecast
- dimensions H x Ø: 42 x 84 mm
- dimmable via optional illuminants

item	colour		price
110000	☐	white	**19,95 €**
110001	☐	silver coloured	**19,95 €**
110002	☐	silver coloured chrome	**19,95 €**



accessories

829063	safety spacer	**6,95 €**

suitable illuminants on page 765





ALGOL I

- aluminium diecast
- dimensions L x B x H: 100 x 100 x 40 mm
- dimmable via optional illuminants

item	colour	price
110003	☐ white	**17,95 €**

CV | 12 Volt | 1x max. 35 W | GU5.3 / MR16 | LED | 35° | 92x92 | 90

accessories

829063 safety spacer **6,95 €**

suitable illuminants on page 765



ALGOL II

- aluminium diecast
- dimensions L x B x H: 185 x 100 x 40 mm
- dimmable via optional illuminants

item	colour	price
110004	☐ white	**33,95 €**

CV | 12 Volt | 2x max. 35 W | GU5.3 / MR16 | LED | 35° | 171x92 | 90

accessories

829063 safety spacer **6,95 €**

suitable illuminants on page 765



ENIF

- aluminium diecast
- dimensions H x Ø: 40 x 100 mm
- dimmable via optional illuminants

item	colour	price
110007	☐ white	**17,95 €**

CV | 12 Volt | 1x max. 35 W | GU5.3 / MR16 | LED | 35° | 92 | 85

accessories

829063 safety spacer **6,95 €**

suitable illuminants on page 765

MIZAR I

- aluminium diecast
- dimensions H x Ø: 41 x 85 mm
- dimmable via optional illuminants



item	colour	price
110010	☐ white	**17,95 €**

CV | 12 Volt | 1x max. 35 W | GU5.3 / MR16 | LED | 72 | 90 | IP44

accessories

829063	safety spacer	**6,95 €**

suitable illuminants on page 765



With the kind support of Albtherme Waldbronn / Ziegler Technics buero@ziegler-technics.de

MIZAR II



- aluminium diecast
- dimensions H x Ø: 33 x 80 mm
- dimmable via optional illuminants

item	colour	price
110011	black	**17,95 €**

CV | 12 Volt | 1x max. 35 W | GU5.3 / MR16 | LED | 68 | 75 | IP44

accessories

829063	safety spacer	**6,95 €**
180515	power supply dimmable | 12V AC | 0-70 W	**19,95 €**

suitable illuminants on page 765



cover

930079	cover angular | metal silver satined | 83 x 83 x 4 mm	**10,95 €**
930075	cover angular | metal white | 83 x 83 x 4 mm	**10,95 €**
930077	cover angular | metal chrome look | 83 x 83 x 4 mm	**10,95 €**
930100	cover angular | metal silver brushed | 83 x 83 x 4 mm	**10,95 €**
930078	cover round | metal silver satined | 83 x 4 mm	**10,95 €**
930074	cover round | metal white | 83 x 4 mm	**10,95 €**
930076	cover round | metal chrome look | 83 x 4 mm	**10,95 €**
930099	cover round | metal silver brushed | 83 x 4 mm	**10,95 €**



ALCOR

- stainless steel
- dimensions H x Ø: 106 x 85 mm
- dimmable via optional illuminants

item	colour	price
110014	silver coloured brushed	**18,95 €**

CV | 12 Volt | 1x max. 35 W | GU5.3 / MR16 | LED | 55 | 106 | IP54

suitable illuminants on page 765





DENEB

- dimensions H x Ø: 148 x 100 mm
- dimmable via optional illuminants

item	colour	price
110015	white	**16,95 €**
110016	silver coloured brushed	**16,95 €**

220-240 Volt | 1x max. 50 W | GU10 | LED | 30 ° | 80 | 148

accessories

829063	safety spacer	**6,95 €**

suitable illuminants on page 767-768


ALTAIR





- aluminium diecast
- dimensions H x Ø: 35 x 85 mm
- dimmable via optional illuminants

item	colour		price
110017	☐ white	round	**12,95 €**
110018	☐ white	angular	**12,95 €**



accessories

829063 safety spacer **6,95 €**

suitable illuminants on page 765


ARKTUR





- aluminium diecast
- dimensions H x Ø: 43 x 93 mm
- dimmable via optional illuminants

item	colour		price
110019	☐ white	round	**17,95 €**
110020	☐ white	angular	**17,95 €**



accessories

829063 safety spacer **6,95 €**

suitable illuminants on page 765

SIRRAH





- aluminium diecast
- dimensions H x Ø: 35 x 92 mm
- dimmable via optional illuminants

item	colour		price
110021	☐ white	round	**20,95 €**
110022	☐ white	angular	**20,95 €**



accessories

829063 safety spacer **6,95 €**

suitable illuminants on page 765



KARDAN I

- aluminium
- dimensions L x B x H: 98 x 98 x 90 mm
- dimmable via optional illuminants

item	colour	price
110100	silver coloured brushed	**28,95 €**

CV | 12 Volt | 1x max. 50 W | GU5.3 / MR16 | LED | 30° | 84x84 | 145

accessories

829063	safety spacer	**6,95 €**

suitable illuminants on page 765



KARDAN II

- aluminium
- dimensions L x B x H: 178 x 98 x 90 mm
- dimmable via optional illuminants

item	colour	price
110101	silver coloured brushed	**50,95 €**

CV | 12 Volt | 2x max. 50 W | GU5.3 / MR16 | LED | 30° | 160x84 | 145

accessories

829063	safety spacer	**6,95 €**

suitable illuminants on page 765





CEILING BUILT-IN RING

- aluminium
- dimensions L x B x H: 92 x 92 x 26 mm
- dimmable via optional illuminants

item	colour		price
110421		silver coloured brushed	**20,95 €**
110427		black	**20,95 €**

CV | 12 Volt | 1x max. 50 W | GU5.3 / MR16 | LED | 35° | 78 | 75

accessories

829063	safety spacer	**6,95 €**

suitable illuminants on page 765



CEILING BUILT-IN RING

- aluminium
- dimensions L x B x H: 175 x 92 x 26 mm
- dimmable via optional illuminants

item	colour		price
111821		silver coloured brushed	**35,95 €**

CV | 12 Volt | 2x max. 50 W | GU5.3 / MR16 | LED | 35° | 165x80 | 70

accessories

829063	safety spacer	**6,95 €**

suitable illuminants on page 765

CEILING BUILT-IN RING



- gypsum
- dimensions H x Ø: 46 x 130 mm
- dimmable via optional illuminants

item	colour	price
110501	white	**24,95 €**

CV | 12 Volt | 1x max. 50 W | GU5.3 / MR16 | LED | 135 | 110

accessories

829063 safety spacer **6,95 €**

suitable illuminants on page 765

CEILING BUILT-IN RING



- gypsum
- dimensions L x B x H: 120 x 120 x 55 mm
- dimmable via optional illuminants

item	colour	price
110500	white	**24,95 €**

CV | 12 Volt | 1x max. 50 W | GU5.3 / MR16 | LED | 120x120 | 110

accessories

829063 safety spacer **6,95 €**

suitable illuminants on page 765

CEILING BUILT-IN RING



- gypsum
- dimensions H x Ø: 60 x 155 mm
- dimmable via optional illuminants

item	colour	price
110503	white	**42,95 €**

CV | 12 Volt | 1x max. 50 W | GU5.3 / MR16 | LED | 45° | 155 | 110

accessories

829063 safety spacer **6,95 €**

suitable illuminants on page 765



CEILING BUILT-IN RING

- stainless steel
- dimensions H x Ø: 35 x 85 mm
- dimmable via optional illuminants

item	colour	price
122420	silver coloured brushed	**17,95 €**

CV | 12 Volt | 1x max. 35 W | GU5.3 / MR16 | LED | 55 | 60 | IP44

suitable illuminants on page 765





CEILING BUILT-IN RING

- aluminium diecast
- dimensions H x Ø: 43 x 102 mm
- dimmable via optional illuminants

item	colour	price
126070	white	**17,95 €**
126074	aluminium	**17,95 €**
126073	silver coloured brushed	**17,95 €**

CV | 12 Volt | 1x max. 50 W | GU5.3 / MR16 | LED | 40° | 92 | 65

accessories

829063	safety spacer	**6,95 €**

suitable illuminants on page 765



COB 95

- aluminium
- dimensions H x Ø: 46 x 108 mm
- dimmable via phase control or phase cut-off

item	colour		colour temperature		light current	price
565067	☐	white	WW	3000 K	820 lm	**95,95 €**
565070	☐	silver coloured brushed	WW	3000 K	820 lm	**95,95 €**
565068	☐	white	NW	4000 K	860 lm	**95,95 €**
565071	☐	silver coloured brushed	NW	4000 K	860 lm	**95,95 €**



accessories

829063	safety spacer	**6,95 €**
180512	power supply | 350 mA | 0,7-18,0 W	**26,95 €**
862203	power supply dimmable | 350 mA | 6,3-12,0 W	**39,95 €**



With the kind support of EA Listen / Euphonic Architect / www.ea-listen.com



Foto: Daniel Vieser . Architekturfotografie, Karlsruhe

ACRUX

All luminaires in the ACRUX series have a special feature; the light temperature [3000, 4000, 6000 K] can be set before installation with the switch on the back. This allows a lot of flexibility in the planning phase. The luminous intensity can be individually regulated by phase angle control. The cover supplied can be easily removed if necessary so that the luminaire can also be installed in its housing colour [white]. The integrated diffuser reduces glare and creates a pleasant lighting situation.



switch for setting
the light temperature



3000 K



4000 K



6000 K

565315
incl. cover silver coloured



565362
incl. cover black




ACRUX 68




- plastic
- dimensions H x Ø: 57,5 x 95,0 mm
- white basic housing can also be used without coloured cover ring
- incl. optional montierbarer cover [silver coloured or black]
- dimmable via phase control or phase cut-off
- light colour adjustable via dip switch

item	colour		colour temperature	light current	price
565315	☐ ☐	white/silver coloured	WW NW CW 3000/4000/6000 K	630 lm	**29,95 €**
565362	☐ ■	white/black	WW NW CW 3000/4000/6000 K	630 lm	**29,95 €**



accessories

930652	cover ring black for Acrux 68	**4,95 €**



light distribution curve

ACRUX 90






- plastic
- dimensions H x Ø: 58,0 x 113,0 mm
- white basic housing can also be used without coloured cover ring
- incl. optional montierbarer cover [silver coloured or black]
- dimmable via phase control or phase cut-off
- light colour adjustable via dip switch

item	colour		colour temperature		light current	price
565316	☐ ☐	white/silver coloured	WW NW CW	3000/4000/6000 K	760 lm	**34,95 €**
565363	☐ ■	white/black	WW NW CW	3000/4000/6000 K	760 lm	**34,95 €**



accessories

930653	cover ring black for Acrux 80	**5,95 €**



light distribution curve

ACRUX 120






- plastic
- dimensions H x Ø: 65,8 x 145,0 mm
- white basic housing can also be used without coloured cover ring
- incl. optional montierbarer cover [silver coloured or black]
- dimmable via phase control or phase cut-off
- light colour adjustable via dip switch

item	colour		colour temperature		light current	price
565317	☐ ☐	white/silver coloured	WW NW CW	3000/4000/6000 K	1370 lm	**39,95 €**
565364	☐ ■	white/black	WW NW CW	3000/4000/6000 K	1370 lm	**39,95 €**



accessories

930654	cover ring black for Acrux 120	**6,95 €**




light distribution curve

ACRUX 145




- plastic
- dimensions H x Ø: 68,5 x 174,0 mm
- white basic housing can also be used without coloured cover ring
- incl. optional montierbarer cover [silver coloured or black]
- dimmable via phase control or phase cut-off
- light colour adjustable via dip switch

item	colour		colour temperature	light current	price
565318	☐ ☐	white/silver coloured	WW NW CW 3000/4000/6000 K	1570 lm	**44,95 €**
565365	☐ ■	white/black	WW NW CW 3000/4000/6000 K	1570 lm	**44,95 €**



accessories

930655	cover ring black for Acrux 145	**7,95 €**



light distribution curve

ACRUX 195




- plastic
- dimensions H x Ø: 84,0 x 244,0 mm
- white basic housing can also be used without coloured cover ring
- incl. optional montierbarer cover [silver coloured or black]
- dimmable via phase control or phase cut-off
- light colour adjustable via dip switch

item	colour		colour temperature	light current	price
565332	☐ ☐	white/silver coloured	WW NW CW 3000/4000/6000 K	2670 lm	**59,95 €**
565366	☐ ■	white/black	WW NW CW 3000/4000/6000 K	2670 lm	**59,95 €**



accessories

930656	cover ring black for Acrux 195	**9,95 €**



light distribution curve

ZAURAK

Recessed ceiling luminaires can be discreetly integrated into private and commercial spaces, but when they need to be replaced, the existing ceiling cut-out can become a problem. The ZAURAK series comes with an adjustable mounting bracket that allows larger or smaller ceiling cut-outs to be used. In addition, the ZAURAK has a low installation depth for universal use. The scope of delivery includes two interchangeable cover rings in silver and black.














ZAURAK 180

- light colour and output adjustable via dip switch
- white basic housing can also be used without coloured cover ring
- incl. optional cover [silver coloured and black]
- adjustable cut-out dimension: 65-160 mm
- plastic
- dimensions H x Ø: 21 x 180 mm

item	colour	colour temperature	light current	price
565327	white/silver coloured/black	WW NW CW 3000/4000/5700 K	1060 lm	**46,95 €**

220-240 Volt | 8/12 W | SMD | 52 LED | Ra>80 | 110° | 65 | IP44



light distribution curve




ZAURAK 220

- light colour and output adjustable via dip switch
- white basic housing can also be used without coloured cover ring
- incl. optional cover [silver coloured and black]
- adjustable cut-out dimension: 120-200 mm
- plastic
- dimensions H x Ø: 22 x 220 mm

item	colour	colour temperature	light current	price
565328	white/silver coloured/black	WW NW CW 3000/4000/5700 K	1750 lm	**56,95 €**

220-240 Volt | 12/18 W | SMD | 65 LED | Ra>80 | 110° | 120 | IP44



light distribution curve




ZAURAK 300

- light colour and output adjustable via dip switch
- white basic housing can also be used without coloured cover ring
- incl. optional cover [silver coloured and black]
- adjustable cut-out dimension: 150-270 mm
- plastic
- dimensions H x Ø: 25 x 300 mm

item	colour	colour temperature	light current	price
565329	white/silver coloured/black	WW NW CW 3000/4000/5700 K	2420 lm	**79,95 €**

220-240 Volt | 18/25 W | SMD | 91 LED | Ra>80 | 110° | 150 | IP44



light distribution curve



LED PANEL 8 + 12 + 16

- aluminium diecast
- dimmable via optinional power supply

item	colour		colour temperature		light current	dimensions H x Ø	Strom	voltage	power	cutout Ø	inst. depth	price
565082	☐	white	WW	2700 K	590 lm	18 x 145 mm	350 mA	17-18 V	7 W	135 mm	18 mm	**39,95 €**
565083	☐	grey	WW	2700 K	590 lm	18 x 145 mm	350 mA	17-18 V	7 W	135 mm	18 mm	**39,95 €**
565084	☐	white	NW	4000 K	610 lm	18 x 145 mm	350 mA	17-18 V	7 W	135 mm	18 mm	**39,95 €**
565085	☐	grey	NW	4000 K	610 lm	18 x 145 mm	350 mA	17-18 V	7 W	135 mm	18 mm	**39,95 €**
565088	☐	white	WW	2700 K	820 lm	20 x 180 mm	350 mA	23-24 V	9 W	169 mm	20 mm	**55,95 €**
565089	☐	grey	WW	2700 K	820 lm	20 x 180 mm	350 mA	23-24 V	9 W	169 mm	20 mm	**55,95 €**
565090	☐	white	NW	4000 K	870 lm	20 x 180 mm	350 mA	23-24 V	9 W	169 mm	20 mm	**55,95 €**
565091	☐	grey	NW	4000 K	870 lm	20 x 180 mm	350 mA	23-24 V	9 W	169 mm	20 mm	**55,95 €**
565094	☐	white	WW	2700 K	1260 lm	20 x 236 mm	700 mA	17-18 V	13 W	222 mm	20 mm	**77,95 €**
565095	☐	grey	WW	2700 K	1260 lm	20 x 236 mm	700 mA	17-18 V	13 W	222 mm	20 mm	**77,95 €**
565096	☐	white	NW	4000 K	1150 lm	20 x 236 mm	700 mA	17-18 V	13 W	222 mm	20 mm	**77,95 €**
565097	☐	grey	NW	4000 K	1150 lm	20 x 236 mm	700 mA	17-18 V	13 W	222 mm	20 mm	**77,95 €**

CC | SMD | Ra>80 | 115°

accessories for **565082-565085**

180512	power supply | 350 mA | 0,7-18,0 W	**26,95 €**
862202	power supply dimmable | 350 mA | 3,9-9,0 W	**31,95 €**
862190	power supply dimmable | mit Dali1/Dali2, Intelli-Push | 3,2-12,0 W	**64,95 €**

accessories for **565088-565091**

180512	power supply | 350 mA | 0,7-18,0 W	**26,95 €**
862203	power supply dimmable | 350 mA | 6,3-12,0 W	**39,95 €**
862190	power supply dimmable | mit Dali1/Dali2, Intelli-Push | 3,2-12,0 W	**64,95 €**

accessories for **565094-565097**

180514	power supply | 700 mA | 1,4-18,0 W	**26,95 €**
862207	power supply dimmable | 700 mA | 9,8-20,0 W	**46,95 €**
862190	power supply dimmable | mit Dali1/Dali2, Intelli-Push | 3,2-12,0 W	**64,95 €**







LED PANEL 8 + 16 + 8

- aluminium diecast
- dimmable and colour temperature adjustable via optional controller

item	colour	colour temperature	light current	dimensions H x Ø	power	cutout Ø	installation depth	price
565102	white	WW CW 2700-6000 K	470 lm	18 x 145 mm	8,50 W	135 mm	18 mm	**52,95 €**
565103	white	WW CW 2700-6000 K	940 lm	20 x 236 mm	15,00 W	222 mm	20 mm	**82,95 €**
565248	white	RGB WW 3000 K	140 lm	18 x 145 mm	8,00 W	135 mm	18 mm	**52,95 €**

CV | 24 Volt | SMD | Ra>80 | 115°

accessories for **565102**

862233	power supply | 24V | 12,00 W	**22,95 €**
862166	power supply | 24V | 100,00 W	**104,95 €**
843057	RF controller Set White | 12/24/48V	**109,95 €**

accessories for **565103**

862234	power supply | 24V | 20,00 W	**26,95 €**
862168	power supply | 24V | 150,00 W	**144,95 €**
843057	RF controller Set White | 12/24/48V	**109,95 €**

accessories for **565248**

862233	power supply | 24V | 12,0 W	**22,95 €**
862166	power supply | 24V | 100,0 W	**104,95 €**
843059	RF controller Set RGB+White | 12/24/48V	**119,95 €**



LED PANEL ROUND III 6 + 12

- aluminium diecast
- dimmable via optinional power supply

item	colour	colour temperature	light current	dimensions H x Ø	voltage	power	cutout Ø	inst. depth	price
565229	white	WW 3000 K	620 lm	34 x 106 mm	18 V	6 W	90 mm	32 mm	**69,95 €**
565230	white	NW 4000 K	630 lm	34 x 106 mm	18 V	6 W	90 mm	32 mm	**69,95 €**
565231	white	WW 3000 K	1310 lm	36 x 140 mm	36 V	13 W	125 mm	34 mm	**89,95 €**
565232	white	NW 4000 K	1320 lm	36 x 140 mm	36 V	13 W	125 mm	34 mm	**89,95 €**

CC | 350 mA | SMD | Ra>80 | 100°

accessories for **565229**, **565230**

862223	power supply | 350 mA | 2-35V | 0,7-12,0 W	**25,95 €**
862202	power supply dimmable | 350 mA | 11-26V | 3,9-9,0 W	**31,95 €**
862190	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 15-34V | 5,2-12,0 W	**64,95 €**

accessories for **565231**, **565232**

180512	power supply | 350 mA | 2-52V | 0,7-18,0 W	**26,95 €**
862204	power supply dimmable | 350 mA | 28-57V | 9,8-20,0 W	**44,95 €**
862191	power supply MULTI-CC DALI DALI1/2/Intelli-Push dimmable | 20-60V | 7,0-20,0W	**69,95 €**





LED PANEL ROUND III 20 + 26

- aluminium diecast
- dimmable via optinional power supply

item	colour	colour temperature	light current	dimensions H x Ø	voltage	power	cutout Ø	inst. depth	price
565233	white	WW 3000 K	1980 lm	38 x 180 mm	28 V	20 W	160 mm	36 mm	**109,95 €**
565234	white	NW 4000 K	1970 lm	38 x 180 mm	28 V	20 W	160 mm	36 mm	**109,95 €**
565235	white	WW 3000 K	2680 lm	38 x 230 mm	37 V	26 W	200 mm	36 mm	**134,95 €**
565236	white	NW 4000 K	2690 lm	38 x 230 mm	37 V	26 W	200 mm	36 mm	**134,95 €**



accessories for **565233**, **565234**

862198	power supply | 700 mA | 21-43V | 14,7-30,0 W	**31,95 €**
862207	power supply dimmable | 700 mA | 14,0-28,0V | 9,8-20,0 W	**46,95 €**
862191	power supply MULTI-CC DALI DALI1/2/Intelli-Push dimmable | 20-36V | 14,0-25,0 W	**69,95 €**

accessories for **565235**, **565236**


862198	power supply | 700 mA | 21-43V | 14,7-30,0 W	**31,95 €**
862208	power supply dimmable | 700 mA | 28-56V | 19,6-40,0 W	**53,95 €**
862192	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 25-64V | 17,5-45,0 W	**74,95 €**



COB 68 IP65

- aluminium diecast
- dimensions H x Ø: 44 x 78 mm
- dimmable via optinional power supply

item	colour		colour temperature		light current	price
565108	☐	white	WW	2700 K	670 lm	**59,95 €**
565109	☐	grey	WW	2700 K	670 lm	**59,95 €**
565110	☐	white	NW	4200 K	730 lm	**59,95 €**
565111	☐	grey	NW	4200 K	730 lm	**59,95 €**



accessories


829063	safety spacer	**6,95 €**
180512	power supply | 350 mA | 0,7-18,0 W	**26,95 €**
862202	power supply dimmable | 350 mA | 3,9 - 9 ,0 W	**31,95 €**



PUNTO LUMI

- aluminium
- dimensions H x Ø: 25 x 30 mm

item	colour		colour temperature		light current	price
565172	☐	white	WW	3000 K	40 lm	**17,95 €**
565173	☐	silver coloured chrome	WW	3000 K	40 lm	**17,95 €**



accessories

872628	power supply | 350 mA | 0,7 - 6,0 W	**18,95 €**





COB 68 CCT

- aluminium
- dimensions H x Ø: 46 x 78 mm
- dimmable and colour temperature adjustable via optional controller

item	colour	colour temperature	light current	price
565193	white	WW CW 2500-6500 K	534 lm	**64,95 €**
565198	silver coloured brushed	WW CW 2500-6500 K	700 lm	**64,95 €**

CV | 24 Volt | 8 W | COB | 1 LED | Ra>80 | 45° | 25° | 68 | 60 | 2 CH

accessories

829063	safety spacer	**6,95 €**
862233	power supply | 24V DC | 12,0 W	**22,95 €**
862166	power supply | 24V DC | 100,0 W	**104,95 €**
843057	RF controller Set White | 12/24/48V	**109,95 €**



COB 95 CCT

- aluminium
- dimensions H x Ø: 65 x 108 mm
- dimmable and colour temperature adjustable via optional controller

item	colour	colour temperature	light current	price
565194	white	WW CW 2500-6500 K	1118 lm	**109,95 €**

CV | 24 Volt | 16 W | COB | 1 LED | Ra>80 | 65° | 25° | 95 | 70 | 2 CH

accessories

829063	safety spacer	**6,95 €**
862234	power supply | 24V DC | 20,0 W	**26,95 €**
862168	power supply | 24V DC | 150,0 W	**144,95 €**
843057	RF controller Set White | 12/24/48V	**109,95 €**



COB 68 ACRYL

A spotlight with that certain something: thanks to its acrylic ring, the COB 68 ACRYL emits light not only downwards but also softly to the side. The resulting play of light on the ceiling makes for a discreet but effective eye-catcher and bathes every room in a cosy ambience.



COB 68 ACRYL

- acrylic glass, aluminium
- dimensions H x Ø: 60 x 78 mm
- dimmable and colour temperature adjustable via optional controller

item	colour	colour temperature	light current	price
565247	colourless satined	ww cw 2400-6500 K	590 lm	**65,95 €**

CV | 24 Volt | 8 W | COB | 1 LED | Ra>80 | 45° | 68 | 43

accessories

930270	acrylic ring round | 90 mm	**19,95 €**
930271	acrylic ring angular | 90 x 90 mm	**19,95 €**
829063	safety spacer	**6,95 €**
862233	power supply | 24V DC | 12,0 W	**22,95 €**
862166	power supply | 24V DC | 100,0 W	**104,95 €**
843057	RF controller Set White | 12/24/48V	**109,95 €**







COB 68 ACRYL

- acrylic glass, aluminium
- dimensions H x Ø: 54 x 78 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
565195	colourless satined	ww 2700 K	675 lm	**65,95 €**

CC | 350 mA | 6,50 W | COB | 1 LED | Ra>80 | 30° | 62 | 50

accessories

930270	acrylic ring round | 90 mm	**19,95 €**
930271	acrylic ring angular | 90 x 90 mm	**19,95 €**
829063	safety spacer	**6,95 €**
180512	power supply | 350 mA | 0,7-18,0 W	**26,95 €**
862202	power supply dimmable | 350 mA | 3,9 - 9 ,0 W	**31,95 €**







SATURN

- aluminium
- dimensions H x Ø: 49 x 100 mm
- dimmable via optinional power supply

item	colour		colour temperature		light current	price
565200	☐	white chrome	WW	2700 K	700 lm	**69,95 €**
565201	■	black chrome	WW	2700 K	700 lm	**69,95 €**
565202	☐	white chrome	NW	4000 K	720 lm	**69,95 €**
565203	■	black chrome	NW	4000 K	720 lm	**69,95 €**



accessories

829063	safety spacer	**6,95 €**
180512	power supply | 350 mA | 0,7 - 18,0 W	**26,95 €**
862202	power supply dimmable | 350 mA | 3,9 - 9 ,0 W	**31,95 €**










DIONE

- aluminium
- dimensions H x Ø: 41 x 82 mm
- required ceiling cavity only 25 mm
- through-wiring possible
- quick installation through Quick-Terminal
- dimmable via phase cut-off

item	colour		colour temperature		light current	price
565355		white	WW	3000 K	700 lm	**59,95 €**
565356		silver coloured	WW	3000 K	700 lm	**59,95 €**
565357		black	WW	3000 K	700 lm	**59,95 €**
565358		white	NW	4000 K	750 lm	**59,95 €**
565359		silver coloured	NW	4000 K	750 lm	**59,95 €**
565360		black	NW	4000 K	750 lm	**59,95 €**





Quick-Terminal



through-wiring













mounting from 25 mm ceiling cavity





ORIONIS

- aluminium diecast
- dimensions H x Ø: 72 x 78 mm
- dimmable via optinional power supply

item	colour		colour temperature		light current	price
565237	☐	white	ww	2700 K	645 lm	**84,95 €**
565240	■	black	ww	2700 K	645 lm	**84,95 €**

CC | 350mA | 17-19 Volt | 6,50 W | COB | 1 LED | Ra>80 | 30° | 68 | 70

accessories

829063	safety spacer	**6,95 €**
180512	power supply | 350 mA | 0,7 - 18,0 W	**26,95 €**
862202	power supply dimmable | 350 mA | 3,9 - 9 ,0 W	**31,95 €**





ORIONIS

- aluminium diecast
- dimensions L x B x H: 78 x 78 x 72 mm
- dimmable via optinional power supply

item	colour		colour temperature		light current	price
565241	☐	white	ww	2700 K	645 lm	**89,95 €**
565244	■	black	ww	2700 K	645 lm	**89,95 €**

CC | 350mA | 17-19 Volt | 6,50 W | COB | 1 LED | Ra>80 | 30° | 68 | 70

accessories

829063	safety spacer	**6,95 €**
180512	power supply | 350 mA | 0,7 - 18,0 W	**26,95 €**
862202	power supply dimmable | 350 mA | 3,9 - 9 ,0 W	**31,95 €**





COB 94 RGBW

- aluminium diecast
- dimensions H x Ø: 70 x 110 mm
- dimmable via optional controller

item	colour	colour temperature	light current	price
565245	grey	RGB WW 3000 K	710 lm	**129,95 €**
565246	silver coloured brushed	RGB WW 3000 K	710 lm	**129,95 €**

CV | 24 Volt | 16 W | COB | 1 LED | Ra>80 | 60° | 25° | 94 | 68 | 4 CH

accessories

829063	safety spacer	**6,95 €**
862234	power supply | 24V | 20,0 W	**26,95 €**
862166	power supply | 24V | 100,0 W	**104,95 €**
843059	RF controller Set RGB+White | 12/24/48V	**119,95 €**





COB-68-350MA-2700K-ROUND-FLAT

- aluminium
- dimensions H x Ø: 30 x 78 mm
- dimmable via optinional power supply

item	colour		colour temperature		light current	price
565263		white	WW	2700 K	490 lm	**49,95 €**
565262		silver coloured brushed	WW	2700 K	490 lm	**49,95 €**
565265		white	NW	4000 K	540 lm	**49,95 €**
565264		silver coloured brushed	NW	4000 K	540 lm	**49,95 €**



accessories

829063	safety spacer	**6,95 €**
862212	power supply | 350 mA | 3,2-8,0 W	**23,95 €**
862202	power supply dimmable | 350 mA | 3,9-9,0 W	**31,95 €**



With the kind support of Göbel's Schlosshotel / 36289 Friedewald [bei Bad Hersfeld]





COB-68-350MA-2700K-ROUND

- aluminium
- dimensions H x Ø: 46 x 78 mm
- dimmable via optinional power supply

item	colour		colour temperature		light current	price
565279		white	WW	2700 K	580 lm	**59,95 €**
565278		silver coloured brushed	WW	2700 K	580 lm	**59,95 €**
565281		white	NW	4000 K	660 lm	**59,95 €**
565280		silver coloured brushed	NW	4000 K	660 lm	**59,95 €**



accessories

829063	safety spacer	**6,95 €**
180512	power supply | 350 mA | 0,7-18,0 W	**26,95 €**
862202	power supply dimmable | 350 mA | 3,9-9,0 W	**31,95 €**





COB-68-350MA-2700K-ANGULAR

- aluminium
- dimensions L x B x H: 78 x 78 x 46 mm
- dimmable via optinional power supply

item	colour		colour temperature		light current	price
565283		white	WW	2700 K	580 lm	**62,95 €**
565282		silver coloured brushed	WW	2700 K	580 lm	**62,95 €**
565285		white	NW	4000 K	660 lm	**62,95 €**
565284		silver coloured brushed	NW	4000 K	660 lm	**62,95 €**



accessories

829063	safety spacer	**6,95 €**
180512	power supply | 350 mA | 0,7-18,0 W	**26,95 €**
862202	power supply dimmable | 350 mA | 3,9-9,0 W	**31,95 €**






COB-68-24V-2700K-ROUND-FLAT

- aluminium diecast
- dimensions H x Ø: 36 x 85mm
- dimmable via optinional power supply

item	colour		colour temperature		light current	price
565300	☐	white	WW	2700 K	330 lm	**59,95 €**
565299	☐	silver coloured brushed	WW	2700 K	330 lm	**59,95 €**
565302	☐	white	NW	4000 K	370 lm	**59,95 €**
565301	☐	silver coloured brushed	NW	4000 K	370 lm	**59,95 €**



accessories

829063	safety spacer	**6,95 €**
872630	power supply | 24V DC | 6,0 W	**18,95 €**
862234	power supply | 24V | 20,0 W	**26,95 €**
862122	power supply | 24V DC | 50,0 W	**59,95 €**
843056	RF controller Set Single | 12/24/48V	**104,95 €**






COB-68-24V-2700K-ROUND

- aluminium diecast
- dimensions H x Ø: 51,50 x 85,00 mm
- dimmable via optinional power supply

item	colour		colour temperature		light current	price
565304	☐	white	WW	2700 K	630 lm	**63,95 €**
565303	☐	silver coloured brushed	WW	2700 K	630 lm	**63,95 €**
565306	☐	white	NW	4000 K	720 lm	**63,95 €**
565305	☐	silver coloured brushed	NW	4000 K	720 lm	**63,95 €**



accessories

829063	safety spacer	**6,95 €**
862233	power supply | 24V | 12,0 W	**22,95 €**
862234	power supply | 24V | 20,0 W	**26,95 €**
862166	power supply | 24V | 100,0 W	**104,95 €**
843056	RF controller Set Single | 12/24/48V	**104,95 €**



COB-95-24V-2700K-ROUND

- aluminium diecast
- dimensions H x Ø: 55 x 115 mm
- dimmable via optinional power supply

item	colour		colour temperature		light current	price
565308	☐	white	WW	2700 K	900 lm	**109,95 €**
565307	☐	silver coloured brushed	WW	2700 K	900 lm	**109,95 €**
565310	☐	white	NW	4000 K	1000 lm	**109,95 €**
565309	☐	silver coloured brushed	NW	4000 K	1000 lm	**109,95 €**

CV | 24 Volt | 12 W | COB | 1 LED | Ra>90 | 45° | 30° | 95 | 53

accessories

829063	safety spacer	**6,95 €**
862234	power supply | 24V | 20,0 W	**26,95 €**
862122	power supply | 24V DC | 50,0 W	**59,95 €**
862166	power supply | 24V | 100,0 W	**104,95 €**
843056	RF controller Set Single | 12/24/48V	**104,95 €**



COB 68 RGBW

- aluminium
- dimensions H x Ø: 46 x 78 mm
- dimmable via optional controller

item	colour		colour temperature	light current	price
565335	☐	white	RGB WW	500 lm	**109,95 €**
565336	☐	silver coloured brushed	RGB WW	500 lm	**109,95 €**

CV | 24 Volt | 8,50 W | COB | 1 LED | Ra>80 | 50° | 25 ° | 68 | 55 | 4 CH

accessories

829063	safety spacer	**6,95 €**
862233	power supply | 24V | 12,0 W	**22,95 €**
862122	power supply | 24V DC | 50,0 W	**59,95 €**
843059	RF controller Set RGB+White | 12/24/48V	**119,95 €**

SMD-68-230V-RUND

A lot of power for a small price! The recessed luminaires of the SMD-68 series provide up to 550 lm and also have an integrated, dimmable power supply unit [230V direct connection], which makes the use of GU10 sockets and retrofit upgrades unnecessary.





SMD-68-230V-ROUND

- plastic
- dimensions H x Ø: 44 x 85 mm
- dimmable via phase control or phase cut-off

item	colour	colour temperature	light current	price
565337	☐ white	WW 2700 K	510 lm	**22,95 €**
565338	☐ white	WW 3000 K	540 lm	**22,95 €**
565339	☐ white	NW 4000 K	550 lm	**22,95 €**







COB 68 MOOD IP65

- aluminium
- dimensions H x Ø: 66 x 83 mm
- dim to warm

item	colour	colour temperature	light current	price
565192	white	ww 2000-2800 K	500 lm	**74,95 €**

220-240 Volt | 7 W | 1 LED | Ra>80 | 40° | 68 | 65 | dtw | IP65



cover

930079	cover angular | metal silver satined | 83 x 83 x 4 mm	**10,95 €**
930075	cover angular | metal white | 83 x 83 x 4 mm	**10,95 €**
930077	cover angular | metal chrome look | 83 x 83 x 4 mm	**10,95 €**
930100	cover angular | metal silver brushed | 83 x 83 x 4 mm	**10,95 €**
930078	cover round | metal silver satined | 83 x 4 mm	**10,95 €**
930074	cover round | metal white | 83 x 4 mm	**10,95 €**
930076	cover round | metal chrome look | 83 x 4 mm	**10,95 €**
930099	cover round | metal silver brushed | 83 x 4 mm	**10,95 €**

COB BACK LIGHT

Designed as a recessed ceiling luminaire for indoor use, the COB BACK LIGHT is equally suitable for classic and modern interiors and architectural projects. The 9 Watt COB warm white LED with 48° beam angle sits in a white die-cast aluminium housing and creates additional, indirect light via the integrated reflector for even more atmosphere in the room.



COB BACK LIGHT

- aluminium diecast
- dimensions H x Ø: 89 x 110 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
565224	white	ww 3000K	1000 lm	**104,95 €**

CC | 500 mA | 21-22 Volt | 9 W | COB | 1 LED | Ra>80 | 48° | 84 | 89

accessories

180513	power supply | 500 mA | 1,0-18,0 W	**26,95 €**
862236	power supply dimmable | 500 mA | 6,0-12,0 W	**32,95 €**



LESATH

In various shapes and surface finishes, the LESATH swivel-mounted recessed ceiling luminaire can be used in a wide variety of applications - from retail and gastronomy to private living spaces. Additional flexibility for planners, architects and electricians is provided by the warm white light source that can vary its colour temperature [2000 – 2800 K] by dimming via phase control. The integrated power supply unit for the 7 Watt LED ensures easy installation.



LESATH

- aluminium diecast
- dimensions H x Ø: 60 x 85 mm
- dim to warm

item	colour	colour temperature	light current	price
565261	black	ww 2000-2800 K	500 lm	**95,95 €**





cover

930252	frame round | aluminium brushed | 22 x 90 mm	**9,95 €**
930254	frame round | aluminium chrome look | 22 x 90 mm	**9,95 €**
930253	frame round | aluminium white painted | 22 x 90 mm	**9,95 €**
930255	frame angular | aluminium brushed | 90 x 90 x 22 mm	**10,95 €**
930257	frame angular | aluminium chrome look | 90 x 90 x 22 mm	**10,95 €**
930256	frame angular | aluminium white painted | 90 x 90 x 22 mm	**10,95 €**



COB 95

- aluminium
- dimensions H x Ø: 53 x 110 mm
- dimmable via optinional power supply
- incl. 2 plastic panes [clear, satined]

item	colour		colour temperature		light current	price
565007	☐	white	WW	3000 K	1100 lm	**84,95 €**
565010	☐	white	NW	4000 K	1100 lm	**84,95 €**

CC | 350 mA | 35 Volt | 13 W | COB | 1 LED | Ra>90 | 60° | 95 | 53

accessories

180512	power supply | 350 mA | 2-52V | 0,7-18,0 W	**26,95 €**
862204	power supply dimmable | 350 mA | 28-57V | 9,8-20,0 W	**44,95 €**
862191	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 20-60V | 7,0-20,0 W	**69,95 €**



COB 130

- aluminium
- dimensions H x Ø: 69 x 145 mm
- dimmable via optinional power supply
- incl. 2 plastic panes [clear, satined]

item	colour		colour temperature		light current	price
565180	☐	white	WW	3000 K	1360 lm	**99,95 €**
565181	☐	white	NW	4000 K	1450 lm	**99,95 €**

CC | 500 mA | 35 Volt | 18 W | COB | 1 LED | Ra>90 | 60° | 130 | 69

accessories

862132	power supply | 500 mA | 2-40V | 1,0-20,0 W	**31,95 €**
862205	power supply dimmable | 500 mA | 20-40V | 10,0-20,0 W	**46,95 €**
862191	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 20-50V | 10,0-25,0 W	**69,95 €**



COB 170

- aluminium
- dimensions H x Ø: 86 x 190 mm
- dimmable via optinional power supply
- incl. 2 plastic panes [clear, satined]

item	colour		colour temperature		light current	price
565182	☐	white	WW	3000 K	2100 lm	**139,95 €**
565183	☐	white	NW	4000 K	2100 lm	**139,95 €**

CC | 700 mA | 35 Volt | 25 W | COB | 1 LED | Ra>90 | 60° | 170 | 86

accessories

862198	power supply | 700 mA | 21-43V | 14,7-30,0 W	**31,95 €**
862208	power supply dimmable | 700 mA | 28-56V | 19,6-40,0 W	**53,95 €**
862192	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 25-64V | 17,5-45,0 W	**74,95 €**



COB 210

- aluminium
- dimensions H x Ø: 99 x 230 mm
- dimmable via optinional power supply
- incl. 2 plastic panes [clear, satined]

item	colour		colour temperature		light current	price
565184	☐	white	WW	3000 K	3000 lm	**179,95 €**
565185	☐	white	NW	4000 K	3200 lm	**179,95 €**

CC | 1050 mA | 35 Volt | 37 W | COB | 1 LED | Ra>90 | 60° | 210 | 99

accessories

862201	power supply | 1050 mA | 19-38V | 20,0-40,0 W	**33,95 €**
862209	power supply dimmable | 1050 mA | 19-38V | 20,0-40,0 W	**53,95 €**
862193	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 14-43V | 14,7-45,0 W	**74,95 €**










ALYA


- LED-power supply integrated in the housing
- plastic
- dimmable via phase control or phase cut-off

item	colour	colour temperature	light current	power	dimensions H x Ø / L x B x H	cutout Ø / L x B	price
565320	white	ww 2700 K	540 lm	7,50 W	10 x 120 mm	100 mm	**23,95 €**
565367	white	ww 3000 K	555 lm	7,50 W	10 x 120 mm	100 mm	**23,95 €**
565321	white	ww 2700 K	540 lm	7,50 W	120 x 120 x 10 mm	105 x 105 mm	**26,95 €**
565368	white	ww 3000 K	555 lm	7,50 W	120 x 120 x 10 mm	105 x 105 mm	**26,95 €**
565322	white	ww 2700 K	960 lm	11,50 W	10 x 180 mm	150 mm	**31,95 €**
565369	white	ww 3000 K	990 lm	11,50 W	10 x 180 mm	150 mm	**31,95 €**
565323	white	ww 2700 K	960 lm	11,50 W	180 x 180 x 10 mm	155 x 155 mm	**33,95 €**
565370	white	ww 3000 K	990 lm	11,50 W	180 x 180 x 10 mm	155 x 155 mm	**33,95 €**







light distribution curve 565320, 565367



light distribution curve 565322, 565369



light distribution curve 565321, 565368



light distribution curve 565323, 565370





LED PANEL SQUARE 8 + 15 + 20

- aluminium diecast
- dimensions L x B x H: 237 x 237 x 20 mm
- dimmable via optinional power supply

item	colour		colour temp.		light current	dimensions L x B x H	Strom/voltage	power	cutout L x B	price
565152		white	WW	2700 K	560 lm	110 x 110 x 23,5 mm	350 mA/18-19 V	7 W	90 x 90 mm	**38,95 €**
565153		grey	WW	2700 K	560 lm	110 x 110 x 23,5 mm	350 mA/18-19 V	7 W	90 x 90 mm	**38,95 €**
565154		white	NW	4000 K	560 lm	110 x 110 x 23,5 mm	350 mA/18-19 V	7 W	90 x 90 mm	**38,95 €**
565155		grey	NW	4000 K	560 lm	110 x 110 x 23,5 mm	350 mA/18-19 V	7 W	90 x 90 mm	**38,95 €**
565156		white	WW	2700 K	1000 lm	180 x 180 x 21,0 mm	350 mA/36-37 V	13 W	115 x 115 mm	**57,95 €**
565157		grey	WW	2700 K	1000 lm	180 x 180 x 21,0 mm	350 mA/36-37 V	13 W	115 x 115 mm	**57,95 €**
565158		white	NW	4000 K	1130 lm	180 x 180 x 21,0 mm	350 mA/36-37 V	13 W	115 x 115 mm	**57,95 €**
565159		grey	NW	4000 K	1130 lm	180 x 180 x 21,0 mm	350 mA/36-37 V	13 W	115 x 115 mm	**57,95 €**
565160		white	WW	2700 K	1560 lm	237 x 237 x 20 mm	700 mA/23-24 V	17 W	215 x 215 mm	**79,95 €**
565161		grey	WW	2700 K	1560 lm	237 x 237 x 20 mm	700 mA/23-24 V	17 W	215 x 215 mm	**79,95 €**
565162		white	NW	4000 K	1740 lm	237 x 237 x 20 mm	700 mA/23-24 V	17 W	215 x 215 mm	**79,95 €**
565163		grey	NW	4000 K	1740 lm	237 x 237 x 20 mm	700 mA/23-24 V	17 W	215 x 215 mm	**79,95 €**



accessories for **565152**, **565153**, **565154**, **565155**

862223	power supply | 350 mA | 2-35V | 0,7-12,0 W	**25,95 €**
862202	power supply dimmable | 350 mA | 11-26V | 3,9-9,0 W	**31,95 €**
862190	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 15-34V | 4,2-12,0 W	**64,95 €**

accessories for **565156**, **565157**, **565158**, **565159**

180512	power supply | 350 mA | 2-52V | 0,7-18,0 W	**26,95 €**
862204	power supply dimmable | 350 mA | 28-57V | 9,8-20,0 W	**44,95 €**
862191	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 20-60V / 7,0-20,0 W	**69,95 €**

accessories for **565160**, **565161**, **565162**, **565163**

180514	power supply | 700 mA | 2-26V | 1,4-18,0 W	**26,95 €**
862207	power supply dimmable | 700 mA | 14-28V | 9,8-20,0 W	**46,95 €**
862191	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 20-36V | 14,0-25,0 W	**69,95 €**



UNI II

- aluminium diecast
- dimensions H x Ø: 84 x 139 mm
- dimmable via optinional power supply

item	colour		colour temperature		light current	price
565343	☐	white	ww	3000 K	1035 lm	**119,95 €**
565361	■	black	ww	3000 K	1035 lm	**119,95 €**





accessories

930339	reflector ring black	**11,95 €**
930340	reflector ring gold	**11,95 €**
930341	reflector ring chrome	**11,95 €**
930371	reflector ring II black	**10,95 €**
930337	cover heatsink black	**3,55 €**
930306	reflector 50°	**10,95 €**
930307	honeycomb filter	**10,95 €**
930308	spread lens 40° | clear/satined	**10,95 €**
930309	softening lens 47° | satined	**10,95 €**
930310	linear spread lens 40°/80° asymmetric | clear/satined	**10,95 €**
180512	power supply | 350 mA | 2-52V | 0,7-18,0 W	**26,95 €**
862204	power supply dimmable | 350 mA | 28-57V | 9,8-20,0 W	**44,95 €**
862191	power supply MULTI-CC DALI DALI1/2/Intelli-Push dimmable | 20-60V | 7,0-20,0 W	**69,95 €**





UNI II MINI

- aluminium diecast
- dimensions H x Ø: 80 x 103 mm
- dimmable via optinional power supply

item	colour		colour temperature		light current	price
565342	☐	white	ww	3000 K	670 lm	**99,95 €**
565354	■	black	ww	3000 K	670 lm	**99,95 €**



accessories

930331	reflector ring black	**10,95 €**
930332	reflector ring gold	**10,95 €**
930333	reflector ring chrome	**10,95 €**
930381	reflector ring II black	**10,95 €**
930329	cover heatsink black	**3,55 €**
180513	power supply | 500 mA | 2-38V | 1,0-18,0 W	**26,95 €**
862236	power supply dimmable | 500 mA | 12-24V | 6,0-12,0 W	**32,95 €**
862190	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 15-24V | 7,5-12,0 W	**64,95 €**






UNI II MAX

- aluminium diecast
- dimensions H x Ø: 97 x 165 mm
- dimmable via optinional power supply

item	colour		colour temperature		light current	price
565344	☐	white	ww	3000 K	2150 lm	**149,95 €**
565351	■	black	ww	3000 K	2150 lm	**149,95 €**



accessories

930398	reflector ring black	**12,95 €**
930399	reflector ring gold	**14,95 €**
930382	reflector ring II black	**10,95 €**
930396	cover heatsink black	**10,95 €**
930390	reflector 24°	**12,95 €**
930392	reflector 50°	**12,95 €**
862198	power supply | 700 mA | 21-43V | 14,7-30,0 W	**31,95 €**
862208	power supply dimmable | 700 mA | 28-56V | 19,6-40,0 W	**53,95 €**
862192	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 25-64V | 17,5-45,0 W	**74,95 €**

MODULAR SYSTEM COB

The MODULAR family of recessed ceiling luminaires offers a wide range of applications. Whether almost invisible or with a present frame – these modules are as flexible as you want them to be. By exchanging the reflectors, different light cones can be created and by using filters / diffusers, you can individually select or retrofit your lighting mood. We offer the LED modules in warm and neutral white. This gives you the option of adapting the individual elements to local requirements in order to create your perfect lighting situation.







MODULAR SYSTEM COB 31W

- aluminium diecast
- dimensions H x Ø: 116 x 93 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
565352	black	WW 3000 K	3270 lm	**109,95 €**
565353	black	NW 4000 K	3350 lm	**109,95 €**

CC | 900 mA | 35-36 Volt | 31 W | COB | 1 LED | Ra>90 | 60°






accessories

930084	reflector 17°	**10,95 €**
930085	reflector 40°	**10,95 €**
930087	diffusor gefrostet	**1,25 €**
930088	honeycomb filter	**5,95 €**
862157	power supply basic | 900 mA | 22-44V | 19,8-40,0 W	**33,95 €**
862192	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 25-50V | 22,5-45,0 W	**74,95 €**











accessories		built-in ring fixed	
930089	☐	white | H x Ø: 50 x 170 mm | cut-out size Ø: 150 mm	**22,95 €**
930090	☐	white | H x Ø: 80 x 230 mm | cut-out size Ø: 220 mm	**29,95 €**



accessories		built-in ring transversable	
930091	☐	white | H x Ø: 30 x 130 mm | cut-out size: 115 mm	**32,95 €**




accessories		gimbal frame transversable	
930092	☐	1er gimbal frame | white | L x B x H: 140 x 140 x 43 mm | cut-out size: 130 x 130 mm	**36,95 €**
930093	☐	2er gimbal frame | white | L x B x H: 257 x 140 x 43 mm | cut-out size: 240 x 130 mm	**66,95 €**




accessories		gimbal frame transversable | without frame	
930094	☐	1er gimbal frame | white | L x B x H: 178 x 120 x 50 mm | cut-out size: 120 x 120 mm	**89,95 €**
930095	■	1er gimbal frame | black | L x B x H: 178 x 120 x 50 mm | cut-out size: 120 x 120 mm	**89,95 €**
930096	☐	2er gimbal frame | white | L x B x H: 305 x 120 x 50 mm | cut-out size: 247 x 120 mm	**115,95 €**
930097	■	2er gimbal frame | black | L x B x H: 305 x 120 x 50 mm | cut-out size: 247 x 120 mm	**115,95 €**




CETI 5

- aluminium diecast
- dimensions L x B x H: 137 x 52 x 44 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
565250	white, black	ww 3000 K	800 lm	**109,95 €**

CC | 700 mA | 14-15 Volt | 10 W | SMD | 5 LED | Ra>90 | 45° | 130x36 | 50



accessories

930218	reflector silver coloured	**14,95 €**
930215	reflector gold optics	**14,95 €**
862049	power supply | 700 mA | 2-19V | 1,4-12,0 W	**25,95 €**
862237	power supply dimmable | 700 mA | 10-17V | 7,0-12,0 W	**32,95 €**



CETI 10

- aluminium diecast
- dimensions L x B x H: 257 x 52 x 44 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
565251	white, black	ww 3000 K	1600 lm	**179,95 €**

CC | 700 mA | 28-29 Volt | 20 W | SMD | 10 LED | Ra>90 | 45° | 250x36 | 50



accessories

930219	reflector silver coloured	**19,95 €**
930216	reflector gold optics	**19,95 €**
862198	power supply | 700 mA | 13-43V | 14,7-30,0 W	**31,95 €**
862207	power supply dimmable | 700 mA | 14,0-28,0V | 9,8-20,0 W	**46,95 €**
862191	power supply MULTI-CC DALI DALI1/2/Intelli-Push dimmable | 20-36V | 5,0-25,0 W	**69,95 €**




CETI 15

- aluminium diecast
- dimensions L x B x H: 376 x 52 x 44 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
565252	white, black	ww 3000 K	2400 lm	**249,95 €**

CC	700 mA	44-45 Volt	30 W	SMD	15 LED	Ra>90	45°	369x36	50

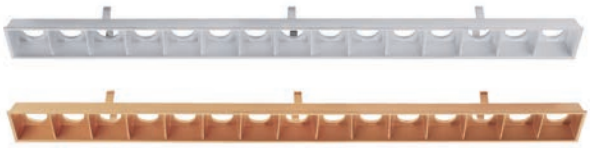

accessories

930220	reflector silver coloured	**24,95 €**
930217	reflector gold optics	**24,95 €**
862199	power supply | 700 mA | 20-57V |20,3-40,0 W	**33,95 €**
862208	power supply dimmable | 700 mA | 28-56V | 19,6-40,0 W	**53,95 €**
862192	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 25-64V | 17,5-45,0W	**74,95 €**





CETI 5 HIDE

- aluminium diecast
- dimensions L x B x H: 131 x 56 x 110 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
565253	black	WW 3000 K	800 lm	**129,95 €**

CC | 700 mA | 14-15 Volt | 10 W | SMD | 5 LED | Ra>90 | 45° | 135x58 | 50



accessories

930218	reflector silver coloured	**14,95 €**
930215	reflector gold optics	**14,95 €**
862049	power supply | 700 mA | 2-19V | 1,4-12,0 W	**25,95 €**
862237	power supply dimmable | 700 mA | 10-17V | 7,0-12,0 W	**32,95 €**



CETI 10 HIDE

- aluminium diecast
- dimensions L x B x H: 251 x 56 x 110 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
565254	black	WW 3000 K	1600 lm	**199,95 €**

CC | 700 mA | 28-29 Volt | 20 W | SMD | 10 LED | Ra>90 | 45° | 255x58 | 50



accessories

930219	reflector silver coloured	**19,95 €**
930216	reflector gold optics	**19,95 €**
862198	power supply | 700 mA | 13-43V | 14,7-30,0 W	**31,95 €**
862207	power supply dimmable | 700 mA | 14,0-28,0V | 9,8-20,0 W	**46,95 €**
862191	power supply MULTI-CC DALI DALI1/2/Intelli-Push dimmable | 20-36V | 5,0-25,0 W	**69,95 €**




CETI 15 HIDE

- aluminium diecast
- dimensions L x B x H: 370 x 56 x 110 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
565255	black	ww 3000 K	2400 lm	**259,95 €**

CC | 700 mA | 44-45 Volt | 30 W | SMD | 15 LED | Ra>90 | 45° | 375x58 | 50

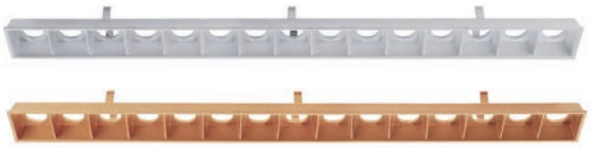

accessories

930220	reflector silver coloured	**24,95 €**
930217	reflector gold optics	**24,95 €**
862199	power supply | 700 mA | 20-57V |20,3-40,0 W	**33,95 €**
862208	power supply dimmable | 700 mA | 28-56V | 19,6-40,0 W	**53,95 €**
862192	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 25-64V | 17,5-45,0W	**74,95 €**






CETI 5 ADJUST

- aluminium diecast
- dimensions L x B x H: 155 x 77 x 83 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
565256	white, black	ww 3000 K	800 lm	**129,95 €**

CC | 700 mA | 14-15 Volt | 10 W | SMD | 5 LED | Ra>90 | 45° | | 90° | 143x76 | 50



accessories

930218	reflector silver coloured	**14,95 €**
930215	reflector gold optics	**14,95 €**
862049	power supply | 700 mA | 2-19V | 1,4-12,0 W	**25,95 €**
862237	power supply dimmable | 700 mA | 10-17V | 7,0-12,0 W	**32,95 €**




CETI 10 ADJUST

- aluminium diecast
- dimensions L x B x H: 275 x 83 x 77 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
565257	white, black	ww 3000 K	1600 lm	**219,95 €**

CC | 700 mA | 28-29 Volt | 20 W | SMD | 10 LED | Ra>90 | 45° | | 90° | 269x76 | 80

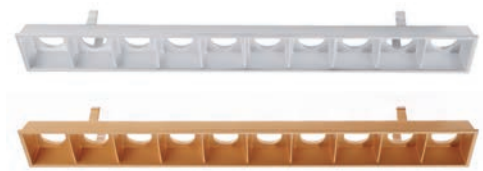

accessories

930219	reflector silver coloured	**19,95 €**
930216	reflector gold optics	**19,95 €**
862198	power supply | 700 mA | 13-43V | 14,7-30,0 W	**31,95 €**
862207	power supply dimmable | 700 mA | 14,0-28,0V | 9,8-20,0 W	**46,95 €**
862191	power supply MULTI-CC DALI DALI1/2/Intelli-Push dimmable | 20-36V | 5,0-25,0 W	**69,95 €**




CETI 15 ADJUST

- aluminium diecast
- dimensions L x B x H: 394 x 77 x 83 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
565258	white, black	ww 3000 K	2400 lm	**289,95 €**



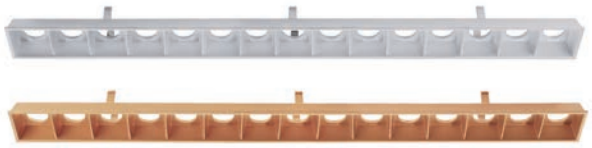


accessories

930220	reflector silver coloured	**24,95 €**
930217	reflector gold optics	**24,95 €**
862199	power supply | 700 mA | 20-57V |20,3-40,0 W	**33,95 €**
862208	power supply dimmable | 700 mA | 28-56V | 19,6-40,0 W	**53,95 €**
862192	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 25-64V | 17,5-45,0W	**74,95 €**



WW NW

3K SMALL
page 153



WW NW

BASIC
from page 156




WW NW CW

BASIC FLEX
from page 157



NW

BASIC OFFICE
from page 158




WW NW

PRO OFFICE
from page 159



WW NW CW

STANDARD FLEX
from page 162



NW

STANDARD OFFICE
from page 163



WW NW CW

STANDARD OFFICE FLEX
from page 164



WW CW

STANDARD HCL
page 166



WW NW RGB

STANDARD RGBW
page 167

insert panels





With the kind support of Regionaldirektion für Deutsche Vermögensberatung Pierre Werner / Direktion für Deutsche Vermögensberatung Uwe Liebholz

LED PANEL 3K SMALL

In the ceiling or on the ceiling – the LED PANEL 3K SMALL is convincing in every variant. In addition to the optionally available frames for the ceiling insert or the ceiling installation, the compact LED panel [available in 3000 or 4000K] can be dimmed via a separate power supply in a flexible control mode. In this way the LED PANEL 3K SMALL presents itself as a modern ceiling luminaire for offices, public authorities, restaurants and much more.



LED PANEL 3K SMALL

- aluminium
- dimensions L x B x H: 295 x 295 x 10 mm
- dimmable via optinional power supply
- incl. 50 cm connection cable

item	colour	colour temperature	light current	price
565220	white	WW 3000 K	2500 lm	**75,95 €**
565221	white	NW 4000 K	2500 lm	**75,95 €**

CC | 700 mA | 34-35 Volt | 25 W | SMD | 96 LED | Ra>80 | 115°

accessories

930230	insert frame | 30 x 30	**29,95 €**
930167	surface mounting frame | 30 x 30	**29,95 €**
862198	power supply | 700 mA | 21-43V | 14,7-30,0 W	**31,95 €**
862208	power supply dimmable | 700 mA | 28-56V | 19,6-40,0 W	**53,95 €**
862192	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 25-64V | 17,5-45,0 W	**74,95 €**

BACKLIGHT PANELS [SERIES: BASIC AND PRO] – TECHNOLOGY AND ADVANTAGES

Not every LED panel is built the same! There are technologies exist to produce homogeneous, flat and glare-free light. Each method has its own advantages and disadvantages and depends on the individual user requirements and budget needs. For example, the LED panels from our BASIC and PRO series rely on backlight technology.

In LED panels with backlight technology, the LEDs - behind the diffuser - are evenly spread over the entire panel surface and shine directly downwards. This design has a decisive advantage: no other components are required to direct the light in the desired direction [downwards], because the LEDs are already in the »right« position. The simpler design results above all in better efficiency and a lower price as well as a longer lifetime. At the same time you do not have to worry about possible yellowing of the light guide plate, which is often used in some cheaper sidelight panels.

The disadvantages: Due to their design, the LED elements require more space, which is why backlight panels are curved towards the backside and therefore have a higher thickness with it. For this [optical] reason, backlight panels are only suitable to a limited extent for suspension from the ceiling. Their smaller beam angle [approx. 90°] results in a smaller illuminated area.

advantages
- better efficiency
- longer lifetime
- lower costs
- much more attractive price/performance ratio
- no light guide plates that are prone to yellowing

disadvantages
- higher thickness
- lower beam angle [approx. 90°]
- less suitable for suspension
- thicker packaging

In the following picture you can see the typical structure of a backlight LED panel.



aluminium frame

microprismatic diffusing lens

diffuser disc

aluminium circuit board with lens LEDs

reflector insert

basic housing



LED PANEL BASIC

- aluminium
- UGR<22
- incl. power supply CC, 900mAh, 33-38V, 36W

item	colour	colour temperature	light current	dimensions L x B x H	price
100149	white	WW 3000 K	3880 lm	595 x 595 x 32 mm	**74,95 €**
100150	white	NW 4000 K	4320 lm	595 x 595 x 32 mm	**74,95 €**
100140	white	WW 3000 K	3900 lm	620 x 620 x 32 mm	**79,95 €**
100141	white	NW 4000 K	4320 lm	620 x 620 x 32 mm	**79,95 €**
100143	white	WW 3000 K	3880 lm	1195 x 295 x 32 mm	**84,95 €**
100144	white	NW 4000 K	4320 lm	1195 x 295 x 32 mm	**84,95 €**



accessories

930674	safety rope	**4,95 €**
930676	installation brackets	**4,95 €**

optional power supplies | CC, 900mAh, 33-38V, 36W

862192	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 25-64V | 17,5-45,0 W	**74,95 €**
862175	power supply Meanwell KNX dimmable | 2-100V | 42,0 W	**144,95 €**
862244	power supply Meanwell mit Casambi-App dimmable | 2-100V | 42,0 W	**249,95 €**

accessories for **100149**, **100150**

930664	surface mounting frame | 60 x 60 x 7 cm	**54,95 €**
930667	mounting frame | 60 x 60 cm	**52,95 €**

accessories for **100140**, **100141**

930665	surface mounting frame | 62,5 x 62,5 x 7 cm	**59,95 €**
930668	mounting frame | 62,5 x 62,5 cm	**57,95 €**

accessories for **100143**, **100144**

930666	surface mounting frame | 120 x 30 x 7 cm	**69,95 €**
930669	mounting frame | 120 x 30 cm	**67,95 €**



dip switch



LED PANEL BASIC FLEX

- aluminium
- UGR<22
- incl. power supply CC, 900mAh, 33-38V, 36W
- light colour adjustable via dip switch

item	colour	colour temperature	light current	dimensions L x B x H	price
100142	white	WW NW CW 3000/4000/6000 K	3900/4320/4140 lm	620 x 620 x 32 mm	**99,95 €**
100145	white	WW NW CW 3000/4000/6000 K	3900/4320/4140 lm	1195 x 295 x 32 mm	**104,95 €**

220-240 Volt | 36 W | LED | Ra>80 | 90° | IP40

accessories

930674	safety rope	**4,95 €**
930676	installation brackets	**4,95 €**

optional power supplies | CC, 900mAh, 33-38V, 36W

862192	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 25-64V | 17,5-45,0 W	**74,95 €**
862175	power supply Meanwell KNX dimmable | 2-100V | 42,0 W	**144,95 €**
862244	power supply Meanwell mit Casambi-App dimmable | 2-100V | 42,0 W	**249,95 €**

accessories for **100142**

930665	surface mounting frame | 62,5 x 62,5 x 7 cm	**59,95 €**
930668	mounting frame | 62,5 x 62,5 cm	**57,95 €**

accessories for **100145**

930666	surface mounting frame | 120 x 30 x 7 cm	**69,95 €**
930669	mounting frame | 120 x 30 cm	**67,95 €**



LED PANEL BASIC OFFICE

- aluminium
- UGR <19
- suitable for VDU workstations
  according to EN 12464-1 BAP65 (L65 ≦ 3000cd/m²)
- microprismatic surface structure
- incl. power supply CC, 900mAh, 33-38V, 36W

item	colour	colour temperature	light current	dimensions L x B x H	price
100151	white	NW 4000 K	4000 lm	595 x 595 x 32 mm	**84,95 €**
100146	white	NW 4000 K	4000 lm	620 x 620 x 32 mm	**89,95 €**
100147	white	NW 4000 K	4000 lm	1195 x 295 x 32 mm	**94,95 €**

220-240 Volt | 36 W | LED | Ra>80 | 90° | IP40

accessories

930674	safety rope	**4,95 €**
930676	installation brackets	**4,95 €**

optional power supplies | CC, 900mAh, 33-38V, 36W

862192	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 25-64V | 17,5-45,0 W	**74,95 €**
862175	power supply Meanwell KNX dimmable | 2-100V | 42,0 W	**144,95 €**
862244	power supply Meanwell mit Casambi-App dimmable | 2-100V | 42,0 W	**249,95 €**

accessories for **100151**

930664	surface mounting frame | 60 x 60 x 7 cm	**54,95 €**
930667	mounting frame | 60 x 60 cm	**52,95 €**

accessories for **100146**

930665	surface mounting frame | 62,5 x 62,5 x 7 cm	**59,95 €**
930668	mounting frame | 62,5 x 62,5 cm	**57,95 €**

accessories for **100147**

930666	surface mounting frame | 120 x 30 x 7 cm	**69,95 €**
930669	mounting frame | 120 x 30 cm	**67,95 €**



LED PANEL PRO OFFICE

- aluminium
- UGR <19
- suitable for VDU workstation
  according to EN 12464-1 BAP65 (L65 ≦ 3000cd/m²)
- microprismatic surface structure
- besonders energieeffizient

item	colour	colour temperature	light current	dimensions L x B x H	price
100148	white	NW 4000 K	3200 lm	595 x 595 x 32 mm	**104,95 €**
100084	white	WW 3000 K	2880 lm	620 x 620 x 32 mm	**109,95 €**
100088	white	NW 4000 K	3200 lm	620 x 620 x 32 mm	**109,95 €**
100089	white	WW 3000 K	2880 lm	1195 x 295 x 32 mm	**114,95 €**
100122	white	NW 4000 K	3200 lm	1195 x 295 x 32 mm	**114,95 €**

CC | 450 mA | 35-40 Volt | 20 W | LED | Ra>80 | 90° | IP40

accessories

930674	safety rope	**4,95 €**
930676	installation brackets	**4,95 €**
862257	power supply QUICK dimmable | 450mAh | 22-44V | 9,9-20,0 W quick installation through Quick-Terminal und through-wiring	**36,95 €**
862191	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 20-60V | 5,0-25,0 W	**69,95 €**

accessories for **100148**

930664	surface mounting frame | 60 x 60 x 7 cm	**54,95 €**
930667	mounting frame | 60 x 60 cm	**52,95 €**

accessories for **100084**, **100088**

930665	surface mounting frame | 62,5 x 62,5 x 7 cm	**59,95 €**
930668	mounting frame | 62,5 x 62,5 cm	**57,95 €**

accessories for **100089**, **100122**

930666	surface mounting frame | 120 x 30 x 7 cm	**69,95 €**
930669	mounting frame | 120 x 30 cm	**67,95 €**

SIDELIGHT-PANELS [SERIES: STANDARD] – TECHNOLOGY AND ADVANTAGES

Not every LED panel is built the same! There are technologies exist to produce homogeneous, flat light. Each method has its own advantages and disadvantages and depends on the individual user requirements and budget needs. For example LED panels from our standard series use sidelight technology.

Unlike backlight panels, the LEDs are not spread over the entire panel surface, but are located on the side of the aluminum frame of the luminaire. Depending on the model and version, only one, two or all four sides are equipped with LED stripes. What all edgelit or sidelight panels have in common is that the LEDs shine into the center of the panel.The light must therefore still be redirected in order to radiate downwards.

The most important element here is the light guide plate. This is usually made of acrylic glass [also PMMA (polymethyl methacrylate), a transparent thermoplastic material], which distributes the light evenly over the entire surface and deflects it downwards. In addition, acrylic glass does not yellow with age. In addition to the light guide plate, which deflects the light by means of small laser-engraved dots, the additional reflector, similar to the one the backlight panel, and the diffuser also contribute to the significantly more complex structure of a sidelight panel [see picture to the right].

The great advantage is the lower construction thickness, which is why edgelit panels can be integrated more discreetly in rooms and are better suited as pendant variants. At the same time, the panels allow a higher beam angle [approx. 120°] what results in a larger illuminated area. The disadvantages: Edgelit panels are more expensive and offer less efficiency and lifetime compared to backlight panels.

advantages
- lower thickness
- higher beam angle [approx. 120°]
- more suitable for suspension
- thinner packing

disadvantages
- higher costs
- worse price/performance ratio
- average lifetime
- lower efficiency

In the following picture you can see the typical structure of a sidelight LED panel.



aluminium frame mithit LEDs

microprismatic diffusing lens

diffuser disc

light guide panel

reflector insert

EVA [ethylene vinyl acetate copolymer] foam

back panel



dip switch



LED PANEL STANDARD FLEX

- aluminium
- UGR<22
- light colour adjustable via dip switch

item	colour		colour temperature	light current	dimensions L x B x H	Strom	power	price
100123	☐	white	WW NW CW 3000/4000/6000 K	3780/4200/4000 lm	620 x 620 x 9 mm	1050 mA	42 W	**119,95 €**
100125	☐	white	WW NW CW 3000/4000/6000 K	3570/3990/3780 lm	1195 x 295 x 9 mm	1050 mA	42 W	**124,95 €**
100139	☐	white	WW NW CW 3000/4000/6000 K	5300/6000/5700 lm	1195 x 595 x 9 mm	1500 mA	60 W	**219,95 €**

CC | 33-38 Volt | LED | Ra>90 | 120° | IP40

accessories

930674	safety rope	**4,95 €**

accessories for **100123**

930672	wire suspension | 200 cm	**22,95 €**
930665	surface mounting frame | 62,5 x 62,5 x 7 cm	**59,95 €**
930670	mounting frame | 62,5 x 62,5 cm	**59,95 €**
862258	power supply QUICK dimmable | 1050mAh | 22-43V | 23,1-45,0 W quick installation through Quick-Terminal und through-wiring	**46,95 €**
862193	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 14-43V | 14,7-45,0 W	**74,95 €**

accessories for **100125**

930672	wire suspension | 200 cm	**19,95 €**
930666	surface mounting frame | 120 x 30 x 7 cm	**69,95 €**
930671	mounting frame | 120 x 30 cm	**69,95 €**
862258	power supply QUICK dimmable | 1050mAh | 22-43V | 23,1-45,0 W quick installation through Quick-Terminal und through-wiring	**46,95 €**
862193	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 14-43V | 14,7-45,0 W	**74,95 €**

accessories for **100139**

930673	wire suspension | 200 cm	**32,95 €**
930675	surface mounting frame | 120 x 60 x 7 cm	**69,95 €**
930688	mounting frame | 120 x 60 cm	**84,95 €**
862259	power supply QUICK dimmable | 1500mAh | 20-40V | 30,0-60,0 W quick installation through Quick-Terminal und through-wiring	**56,95 €**
862194	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 25-70V | 26,3-75,0 W	**91,95 €**



LED PANEL STANDARD OFFICE

- aluminium
- UGR <19
- suitable for VDU workstations
  according to EN 12464-1 BAP65 (L65 ≦ 3000cd/m²)
- microprismatic surface structure

item	colour	colour temperature	light current	dimensions L x B x H	price
100124	white	NW 4000 K	4200 lm	620 x 620 x 9 mm	**124,95 €**
100138	white	NW 4000 K	4200 lm	1195 x 295 x 9 mm	**129,95 €**

CC | 1050 mA | 33-38 Volt | 42 W | LED | Ra>90 | 120° | IP40

accessories

930674	safety rope	**4,95 €**
930672	wire suspension | 200 cm	**22,95 €**
862258	power supply QUICK dimmable | 1050mAh | 22-43V | 23,1-45,0 W quick installation through Quick-Terminal und through-wiring	**46,95 €**
862193	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 14-43V | 14,7-45,0 W	**74,95 €**

accessories for **100124**


930665	surface mounting frame | 62,5 x 62,5 x 7 cm	**59,95 €**
930670	mounting frame | 62,5 x 62,5 cm	**59,95 €**

accessories for **100138**

930666	surface mounting frame | 120 x 30 x 7 cm	**69,95 €**
930671	mounting frame | 120 x 30 cm	**69,95 €**




dip switch

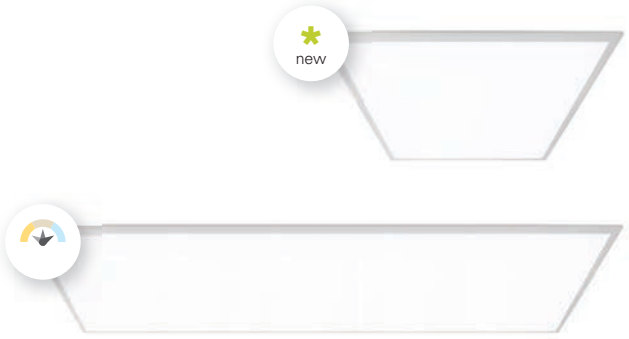

LED PANEL STANDARD OFFICE FLEX

- aluminium
- UGR <19
- suitable for VDU workstations
  according to EN 12464-1 BAP65 (L65 ≦ 3000cd/m²)
- microprismatic surface structure
- light colour adjustable via dip switch
- incl. power supply CC, 1050mAh, 40W
- dimmable via phase control or phase cut-off

item	colour	colour temperature	light current	dimensions L x B x H	price
100078	white	WW NW CW 3000/4000/6000 K	3300 lm	620 x 620 x 10 mm	**179,95 €**
100079	white	WW NW CW 3000/4000/6000 K	3500 lm	1195 x 295 x 10 mm	**209,95 €**



accessories for **100078**

930665	surface mounting frame | 62,5 x 62,5 x 7 cm	**59,95 €**
930670	mounting frame | 62,5 x 62,5 cm	**59,95 €**

optional power supplies | CC, 1050mAh, 40W

862193	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 14-43V | 14,7-45,0 W	**74,95 €**
862175	power supply Meanwell KNX dimmable | 2-100V | 42,0 W	**144,95 €**
862244	power supply Meanwell mit Casambi-App dimmable | 2-100V | 42,0 W	**249,95 €**

accessories for **100079**

930666	surface mounting frame | 120 x 30 x 7 cm	**69,95 €**
930671	mounting frame | 120 x 30 cm	**69,95 €**

optional power supplies | CC, 1050mAh, 40W

862193	power supply MULTI-CC DALI1/2/Intelli-Push dimmable | 14-43V | 14,7-45,0 W	**74,95 €**
862175	power supply Meanwell KNX dimmable | 2-100V | 42,0 W	**144,95 €**
862244	power supply Meanwell mit Casambi-App dimmable | 2-100V | 42,0 W	**249,95 €**



With the kind support of Projekt: Leicht Küchenstudio Ettlingen/ Planung/Umsetzung: CS Elektroanlagen Ettlingen



LED PANEL STANDARD HCL

- aluminium
- dimensions L x B x H: 620 x 620 x 10 mm
- dimmable via optional controller


item	colour	colour temperature	light current	price
100032	white	WW CW 3000-5500 K	3551 lm	**149,95 €**

CV | 24 Volt | 48 W | SMD | 480 LED | Ra>80 | 120 °

accessories

930665	surface mounting frame | 62,5 x 62,5 x 7 cm	**59,95 €**
930670	mounting frame | 62,5 x 62,5 cm	**59,95 €**
862122	power supply | 24V DC | 50 W	**59,95 €**
862166	power supply | 24V DC | 100 W	**104,95 €**
843057	RF controller Set White | 12/24/48V	**109,95 €**

additional controller and dimmer from page 735
additional power supplies from page 697

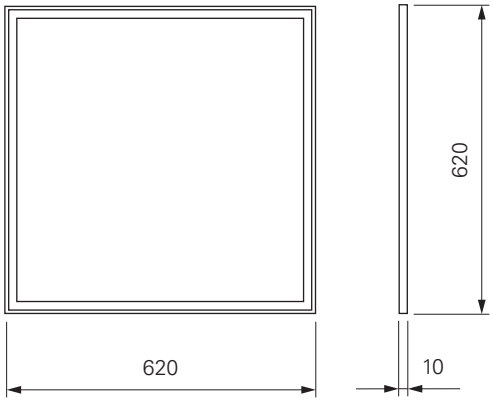



LED PANEL STANDARD RGBW

- aluminium
- dimensions L x B x H: 620 x 620 x 11,9 mm
- particularly powerful and intense colours
- dimmable via optional controller


item	colour	colour temperature	light current	power RGB	power W	price
100152	white	RGB WW 3000 K	4000 lm	3x 18W	40W	**189,95 €**
100153	white	RGB NW 4000 K	4200 lm	3x 18W	40W	**189,95 €**

CV | 24 Volt | SMD | 224 LED | Ra>90 | 110° | IP40

accessories

930665	surface mounting frame | 62,5 x 62,5 x 7 cm	**59,95 €**
930670	mounting frame | 62,5 x 62,5 cm	**59,95 €**
862166	power supply | 24V DC | 100 W | IP20	**104,95 €**
872091	power supply | 24V DC | 320 W | IP67	**239,95 €**
843059	RF controller Set RGB+White | 12/24/48V	**119,95 €**

additional controller and dimmer from page 735
additional power supplies from page 697

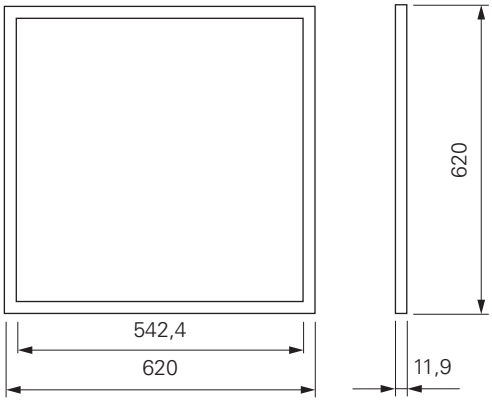



page 170



page 172



page 173



page 174



page 174



page 176



page 178



page 179



page 180



page 182



page 182



page 184



page 186



page 188



page 188



page 189



page 189



page 190



page 190

surface mounted wall lights



page 191



page 191



page 192



page 192



page 192



page 193



page 193



page 193



page 194



page 194



page 194



page 196

BERMUDA II

Clear design language, visual highlight! With the BERMUDA luminaire series developed by our designer Johannes Tomm, you can create a feel-good atmosphere far away from the typical »0815«.

Whether elegant wall lamp, unusual table and floor lamp or even the lighting of your garden – the BERMUDA series gives every lighting situation its own special touch.





suitable
table /
floor lights
page 212/213
346018
346017
343029
343028



suitable
wall light
IP65
page 418
731124



suitable
bollard light
IP65
page 382
731124



suitable
ground spike
lights
IP65
page 456
733060
733059


BERMUDA II

- Design by Johannes Tomm
- easy mounting
- 360° beam angle
- aluminium diecast
- dimensions L x H: 123 x 200 mm
- socket H x Ø: 93 x 70 mm

item	colour		colour temperature		light current	price
342159	☐	white	ww	3000 K	655 lm	**135,95 €**
342160	■	black	ww	3000 K	655 lm	**135,95 €**

220-240 Volt | SMD | 144 LED | Ra>80 | 360°



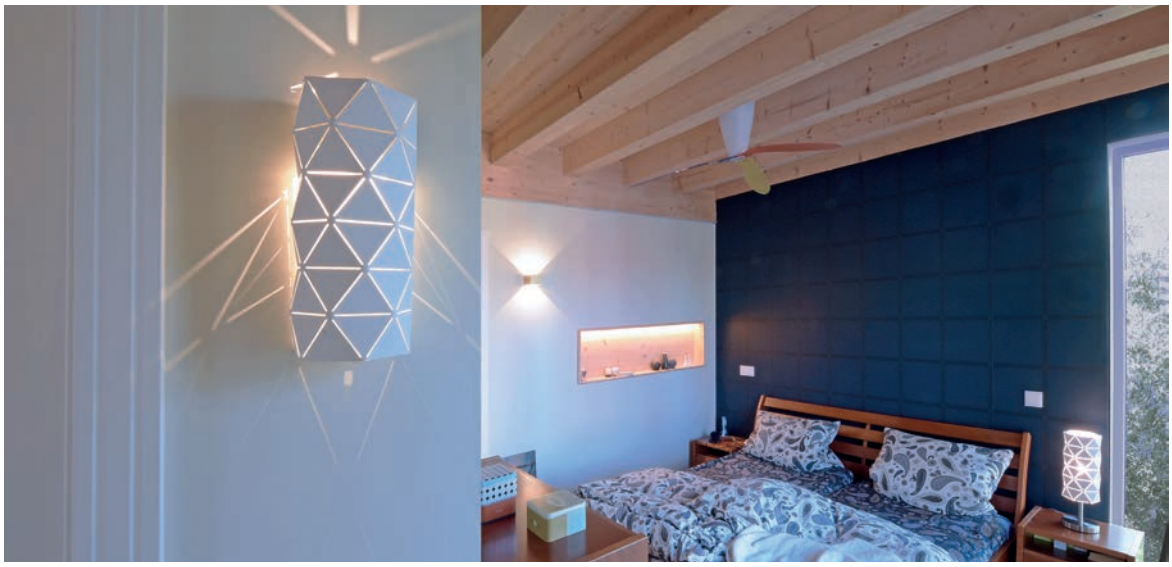

ASTEROPE LINEAR

Light & shadow: Hardly any luminaire embodies this dualism more beautifully than the ASTEROPE in its various versions. The wall luminaire, which is open at the top and bottom, creates a multifaceted play of light and shadow on walls and ceilings that blends extravagantly yet harmoniously into any ambience.







suitable
pendant lights
page 11
342135
342136



suitable
table and
floor lights
page 216
346003
346004
343020
343021

ASTEROPE LINEAR

- metal
- dimensions L x W: 300 x 150 mm
- dimmable via optional illuminants

item	colour	price
341216	white	**75,95 €**
341217	black	**75,95 €**

220-240 Volt | 2x max. 25,0 W | E14 | LED


suitable illuminants on page 769



UNI II

- aluminium diecast
- dimensions L x W x H x Ø: 120 x 95 x 205 x 100 mm
- socket L x W x H: 120 x 43 x 205 mm
- dimmable via phase control or phase cut-off

item	colour		colour temperature		light current	price
341215	☐	white	ww	3000 K	670 lm	**179,95 €**
341232	■	black	ww	3000 K	670 lm	**179,95 €**






accessories

930339	reflector ring black	**11,95 €**
930340	reflector ring gold	**11,95 €**
930341	reflector ring chrome	**11,95 €**
930371	reflector ring II black glossy	**10,95 €**
930335	cover backside black	**3,55 €**
930337	cover heatsink black	**3,55 €**
930306	reflector 50°	**10,95 €**
930307	honeycomb filter	**10,95 €**
930308	spread lens 40° | clear/satined	**10,95 €**
930309	softening lens 47° | satined	**10,95 €**
930310	linear spread lens 40°/80° asymmetric | clear/satined	**10,95 €**

ARIETIS

A modern wall lamp with outstanding design and glare-free light. The ARIETIS impresses with its clear line, the beautiful and very elegant finish in polished aluminium and convinces completely with the built-in G9 socket. This gives you the possibility to choose the right illuminant for you. Whether halogen or LED, warm white or cool white, you have the strings in your hand. Hardly any other luminaire emphasises your modern lifestyle like the ARIETIS.







ARIETIS

- aluminium diecast
- dimensions L x W x H: 170 x 85 x 70 mm
- socket L x W x H: 120 x 45 x 20 mm
- dimmable via optional illuminants


item	colour		price
341188	☐	white	**79,95 €**
341189	☐	silver coloured	**79,95 €**
341190	■	black	**79,95 €**

220-240 Volt | 1x max. 42 W | G9 | T LED

suitable illuminants on page 766

ACAMAR

Small, noble, elegant and unobtrusive – the ACAMAR is a luminaire made of high-quality aluminium. The colour rendering value is over 90, which means high colour fastness. The design is chic and interesting due to the single-sided rounding. You can mount the luminaire with the rounding upwards or downwards, depending on your preference. The white lacquering on the inside emphasises the warm white light and distributes it pleasantly upwards and downwards. The outside is highly polished and thus shines in full brilliance.







ACAMAR

- aluminium diecast
- dimensions L x W x H: 170 x 100 x 80 mm
- socket L x W x H: 120 x 60 x 33 mm
- dimmable via phase control or phase cut-off

item	colour		colour temperature	light current	price
341194	☐	white	ww 3000 K	390 lm	**124,95 €**
341195	☐	silver coloured	ww 3000 K	400 lm	**124,95 €**
341196	■	black	ww 3000 K	250 lm	**124,95 €**


220-240 Volt | 5 W | COB | 1 LED | Ra>90 | 105° | + –



With the kind support of Regionaldirektion für Deutsche Vermögensberatung Pierre Werner / Direktion für Deutsche Vermögensberatung Uwe Liebholz

CANOPUS

Our light chameleon: extraordinary design meets innovative dimmer technology. The further you dim the CANOPUS, the warmer the light becomes. No luminaire comes close to real candlelight - but the CANOPUS is not far off. Elegant, glare-free and modern ambient lighting at its best!

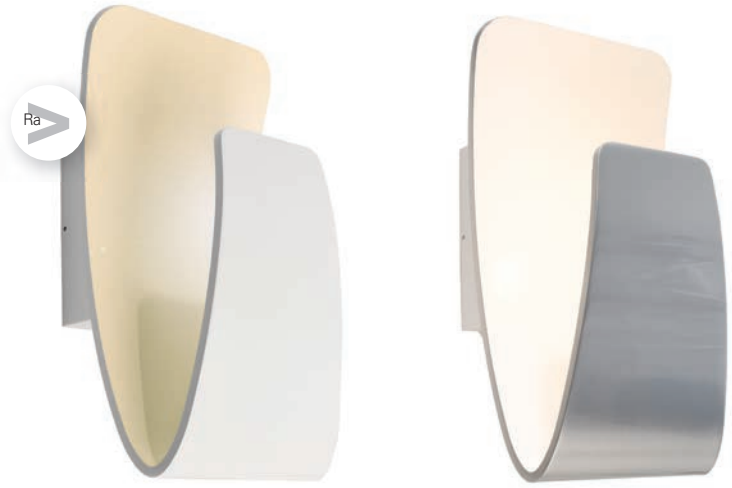

CANOPUS

- aluminium diecast
- dimensions L x W x H: 140 x 115 x 265 mm
- socket L x W x H: 110 x 110 x 33 mm
- dim to warm

item	colour		colour temperature		light current	price
341197		white	ww	2000-3000 K	900 lm	**214,95 €**
341198		silver coloured	ww	2000-3000 K	900 lm	**214,95 €**







PARALA & LARGA

The simple PARALA and LARGA wall-mounted luminaires impress with their linear design and high-quality aluminium housing, which is available in two different finishes. However, they not only set the stage with their modern housing shape, but also create a pleasant lighting atmosphere with their indirect warm white light source.



PARALA 425

- aluminium diecast
- dimensions L x W x H: 425 x 44 x 34 mm
- socket L x W x H: 170 x 44 x 34 mm

item	colour		colour temperature		light current	price
341208	☐	white satined	ww	3000 K	440 lm	**109,95 €**
341207	☐	silver coloured brushed	ww	3000 K	440 lm	**109,95 €**

100-240 Volt | 4 W | SMD | 32 LED | Ra>80 | 110°





LARGA 910

- aluminium diecast
- dimensions L x W x H: 910 x 44 x 44 mm
- socket L x W x H: 170 x 44 x 37 mm

item	colour		colour temperature		light current	price
341210	☐	white satined	ww	3000 K	770 lm	**214,95 €**
341209	☐	silver coloured brushed	ww	3000 K	770 lm	**214,95 €**

100-277 Volt | 8 W | SMD | 100 LED | Ra>80 | 110°

APODIS

Luminaire or piece of jewellery? We are happy to leave the decision to you. However, the APODIS in its two lengths and surface finishes in gold and rose gold is a timeless and flexible lighting element that decorates every wall with its dimmable, two-sided LED light emission.



APODIS 500

- aluminium
- dimensions L x W x H: 76 x 61 x 500 mm
- socket L x W x H: 60 x 18 x 100 mm
- dimmable via phase control or phase cut-off

item	colour	colour temperature	light current	price
341200	gold optics	WW 3000 K	350 lm	**189,95 €**
341201	rosé	WW 3000 K	350 lm	**189,95 €**

220-240 Volt | 9 W | COB | 2 LED | Ra>80 | 40° | + –



APODIS 800

- aluminium
- dimensions L x W x H: 76 x 61 x 800 mm
- socket L x W x H: 60 x 18 x 100 mm
- dimmable via phase control or phase cut-off

item	colour	colour temperature	light current	price
341202	gold optics	WW 3000 K	450 lm	**229,95 €**
341203	rosé	WW 3000 K	450 lm	**229,95 €**

220-240 Volt | 12 W | COB | 2 LED | Ra>80 | 30° | + –







CUBE

- concrete
- dimensions L x W x H: 115 x 115 x 115 mm
- dimmable via optional illuminants

item	colour	price
341183	grey	**81,95 €**
341184	dark grey	**81,95 €**
341185	beige	**81,95 €**

220-240 Volt | 1x max. 25 W | G9 | LED

suitable illuminants on page 766







MINI CUBE

- aluminium
- dimensions L x W x H: 80 x 80 x 65 mm
- socket Ø: 100 mm

item	colour	colour temperature	light current	price
620137	gypsum | white	ww 3000 K	350 lm	**85,95 €**
620136	concrete | grey	ww 3000 K	350 lm	**85,95 €**
620139	concrete | grey granite	ww 3000 K	350 lm	**85,95 €**
620138	concrete | beige granite	ww 3000 K	350 lm	**85,95 €**
620140	concrete | black	ww 3000 K	350 lm	**85,95 €**

220-240 Volt | 3,50 W | SMD | 18 LED | Ra>80 | 180°



QUINTA II

Concrete – Cube – LED module what more could you want? The timeless shape of the cube was made of concrete and equipped with an efficient 6 Watt LED module. This combination makes QUINTA II the ideal luminaire for many interior applications. Whether as room light or accent lighting, with QUINTA II you are definitely on the fast track in terms of design.



QUINTA II

- concrete
- dimensions L x W x H: 125 x 60 x 125 mm
- socket L x W x H: 100 x 80 x 45 mm

item	colour	colour temperature	light current	price
341180	grey	ww 3000 K	250 lm	**129,95 €**

220-240 Volt | 6 W | SMD | 2 LED | Ra>80



YPSILON

Geometric design and maximum variability – the YPSILON consists of two parts, a base and the name-giving interchangeable Y-part. Thanks to the round base and the variable mounting, one or more YPSILON luminaires can be used to create highly interesting light effects on walls. Just a few degrees of rotation creates a completely different light image. Thanks to the many different materials, e.g. white plaster, which can also be customised, or grey granite, almost impossible variations can be conjured up.






YPSILON

- aluminium | gypsum | concrete
- dimensions L x W x H: 245 x 232 x 65 mm
- socket Ø: 100 mm

item	colour	colour temperature	light current	price
620132	gypsum | white paintable	ww 3000 K	350 lm	**106,95 €**
620135	concrete | grey granite	ww 3000 K	350 lm	**106,95 €**
620134	concrete | beige granite	ww 3000 K	350 lm	**106,95 €**
620133	concrete | black	ww 3000 K	350 lm	**106,95 €**

220-240 Volt | 3,50 W | SMD | 18 LED | Ra>80 | 180°





ARIANNA II

- concrete
- dimensions L x W x H: 200 x 85 x 120 mm
- socket L x W x H: 135 x 3 x 65 mm
- dimmable via optional illuminants

item	colour	price
341187	grey	**69,95 €**

220-240 Volt | 1x max. 25 W | G9 | LED

suitable illuminants on page 766



SARIN

- concrete
- dimensions L x W x H: 300 x 100 x 75 mm
- socket L x W x H: 158 x 38 x 53 mm
- dimmable via optional illuminants

item	colour	price
341178	grey	**69,95 €**

220-240 Volt | 1x max. 25 W | E14 | LED

suitable illuminants on page 769



ATRIA

- concrete
- dimensions L x W x H: 180 x 100 x 90 mm
- socket L x W x H: 65 x 71 x 19 mm
- dimmable via optional illuminants

item	colour	price
341176	grey	**85,95 €**

220-240 Volt | 25 W | G9 | LED

suitable illuminants on page 766



OSANO II

- concrete
- dimensions L x W x H: 150 x 130 x 128 mm
- socket L x W x H: 58 x 63 x 23 mm
- dimmable via optional illuminants

item	colour	price
341177	grey	**69,95 €**

220-240 Volt | 1x max. 25 W | G9 | LED

suitable illuminants on page 766

FLY

FLY is a wall-mounted luminaire based on a patented design by Johannes Tomm, available exclusively from DEKO-LIGHT. With its unusual plaster construction, the FLY can be individually designed and creates an indirect, glare-free light that blends into different spaces without any problems.






FLY I + II

- gypsum
- dimensions L x W x H: 240 x 123 x 170 mm
- socket H x Ø: 60 x 100 mm
- dimmable via phase control or phase cut-off

item	colour	colour temperature	light current	price
341222	white paintable	ww 3000 K	310 lm	**109,95 €**
341224	white paintable	ww 3000 K	310 lm	**109,95 €**










DL TWYNNDA I + II

- gypsum
- dimensions L x W x H: 321 x 120 x 130 mm
- socket L x W: 198 x 20 mm
- dimmable via optional illuminants

item	colour	price
341205	white paintable	**55,95 €**
341206	white paintable	**55,95 €**



suitable illuminants on page 769

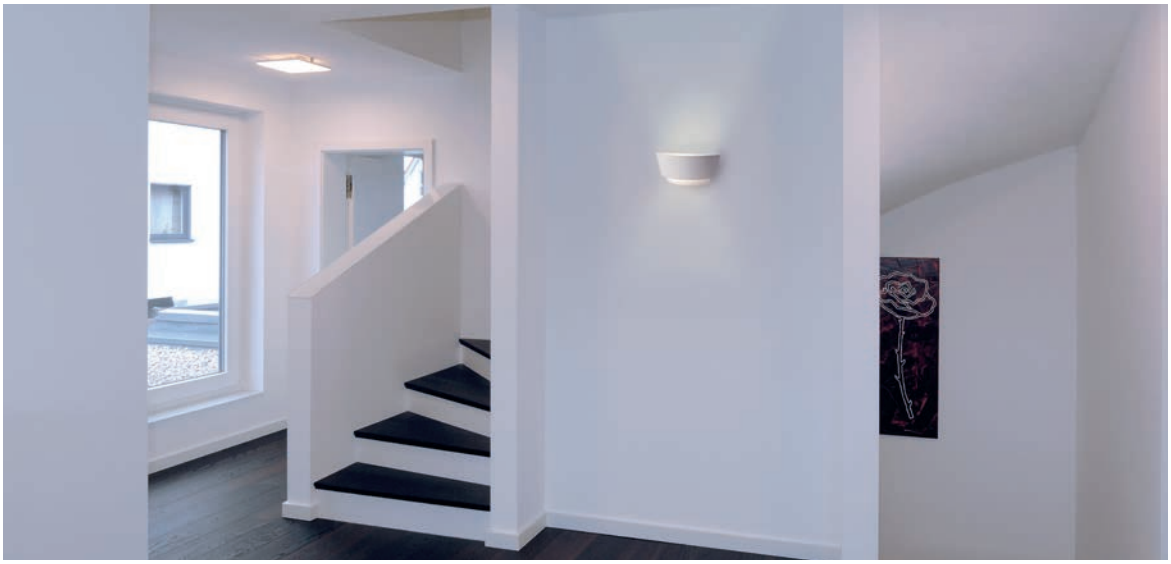



GIORGIA

- gypsum
- dimensions L x W x H: 70 x 100 x 120 mm
- socket L x W: 90 x 45 mm
- dimmable via optional illuminants

item	colour	price
341033	☐ white paintable	**49,95 €**

220-240 Volt | 1x max. 25 W | G9 | LED

suitable illuminants on page 766



OLGA

- gypsum
- dimensions L x W x H: 142 x 142 x 140 mm
- socket L x W x H: 120 x 120 x 17 mm
- dimmable via optional illuminants

item	colour	price
341225	☐ white paintable	**51,95 €**

220-240 Volt | 1x max. 40 W | G9 | LED

suitable illuminants on page 766



RELONO

- gypsum
- dimensions L x W x H: 260 x 90 x 300 mm
- socket L x W: 180 x 180 mm
- dimmable via optional illuminants

item	colour	price
341010	☐ white paintable	**59,95 €**

220-240 Volt | 2x max. 40 W | E14 | LED

suitable illuminants on page 769



ESSA

- gypsum
- dimensions L x W x H: 255 x 75 x 100 mm
- socket L x W: 88 x 58 mm
- dimmable via optional illuminants

item	colour	price
341105	☐ white paintable	**64,95 €**

220-240 Volt | 2x max. 35 W | GU10 | LED

suitable illuminants on page 767-768



QUINTA

- gypsum
- dimensions L x W x H: 125 x 60 x 125 mm
- socket L x W: 100 x 60 mm

item	colour	colour temperature	light current	price
341062	☐ white paintable	ww 3000 K	270 lm	**99,95 €**

220-240 Volt | 5,50 W | SMD | 2 LED | Ra>80



ARIANNA

- gypsum
- dimensions L x W x H: 300 x 95 x 140 mm
- socket L x W: 155 x 20 mm
- dimmable via optional illuminants

item	colour	price
341035	☐ white paintable	**69,95 €**

220-240 Volt | 1x max. 80 W | R7S 78mm | LED

suitable illuminants on page 774



NETITO

- gypsum
- dimensions L x W x H: 245 x 123 x 92 mm
- socket L x W: 180 x 14 mm
- dimmable via optional illuminants

item	colour	price
341057	☐ white paintable	**69,95 €**

220-240 Volt | 1x max. 80 W | R7S 78mm | LED

suitable illuminants on page 774



CAROLINE

- gypsum
- dimensions L x W x H: 377 x 177 x 121 mm
- socket L x W x H: 215 x 62 x 20 mm
- dimmable via optional illuminants

item	colour	price
341223	☐ white paintable	**99,95 €**

220-240 Volt | 1x max. 60 W | E27 | LED

suitable illuminants on page 770-771



OSANO

- gypsum
- dimensions L x W x H: 150 x 115 x 125 mm
- socket L x W: 62 x 57 mm
- dimmable via optional illuminants

item	colour	price
341065	☐ white paintable	**52,95 €**

220-240 Volt | 1x max. 40 W | G9 | LED

suitable illuminants on page 766

CREATIVE IDEAS FOR YOUR PLASTER LUMINAIRES

Plaster luminaires are very easy to design individually. After priming [e.g. with deep primer], you can paint, spray, varnish or even glue on the plaster surface. Experienced designers carefully remove or apply material and thus create a real one-of-a-kind luminaire – as in the three examples below, which were individually designed and have since caused a stir not only in the living room, hallway and staircase area, but also in the children's room...







MADERA

The MADERA series is made of first-class European oak wood and impresses with its modern design and mix of materials in private living areas, hotels, restaurants and many more. The noble MADERA luminaires distribute their powerful warm white light in any room and thus also cut an excellent figure as functional and high-quality lighting at reception counters and more.







suitable
ceiling lights
page 89
348147



suitable
pendant light
page 46
342169



suitable
table /
floor lights
page 220
346044
343031

MADERA

- modern, exclusive design
- from high-quality oak wood of grade A
- FSC-certified raw material oak wood
- environmentally friendly packaging
- oak wood | aluminium
- dimensions L x W x H: 450 x 60 x 130 mm
- socket L x W x H: 250 x 60 x 30 mm

item	colour	colour temperature	light current	price
341248	wood, black	ww 3000 K	560 lm	**259,95 €**

220-240 Volt | 7 W | LED | Ra>80



page 200



page 200



page 200



page 200



page 200



page 201



page 201



page 201



page 201



page 201


built in wall lights



ALWAID 2

ALWAID is your problem solver when space is tight. Thanks to its small design, the recessed wall luminaire fits into all 68 mm deep switch boxes and does not require a power supply unit.

With its numerous covers, it blends safely into its surroundings and presents a beautiful indirect light that can be dimmed.







ALWAID 2

- aluminium diecast
- dimensions H x Ø: 40 x 71 mm
- dimmable via phase control or phase cut-off
- suitable for 68 mm switch boxes in deep version

item	colour	colour temperature	light current	price
563009	white	ww 2700 K	230 lm	**79,95 €**




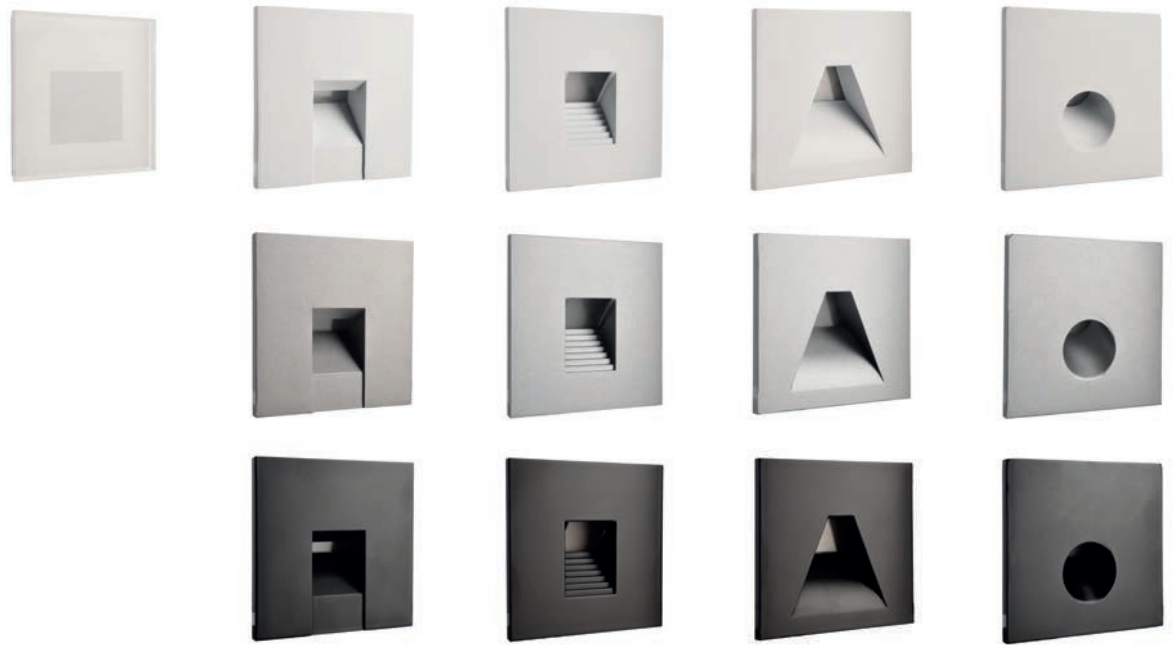

cover

930480	angular | milky | white | L x W x H: 78 x 78 x 22 mm	**21,95 €**
930482	angular square | white | L x W x H: 75 x 75 x 22 mm	**17,95 €**
930485	angular step | white | L x W x H: 75 x 75 x 22 mm	**17,95 €**
930488	angular trapeze | white | L x W x H: 75 x 75 x 22 mm	**17,95 €**
930491	angular round | white | L x W x H: 75 x 75 x 22 mm	**17,95 €**
930483	angular square | aluminium| L x W x H: 75 x 75 x 22 mm	**17,95 €**
930486	angular step | aluminium| L x W x H: 75 x 75 x 22 mm	**17,95 €**
930489	angular trapeze | aluminium| L x W x H: 75 x 75 x 22 mm	**17,95 €**
930492	angular round | aluminium| L x W x H: 75 x 75 x 22 mm	**17,95 €**
930484	angular square | black | L x W x H: 75 x 75 x 22 mm	**17,95 €**
930487	angular step | black | L x W x H: 75 x 75 x 22 mm	**17,95 €**
930490	angular trapeze | black | L x W x H: 75 x 75 x 22 mm	**17,95 €**
930493	angular round | black | L x W x H: 75 x 75 x 22 mm	**17,95 €**



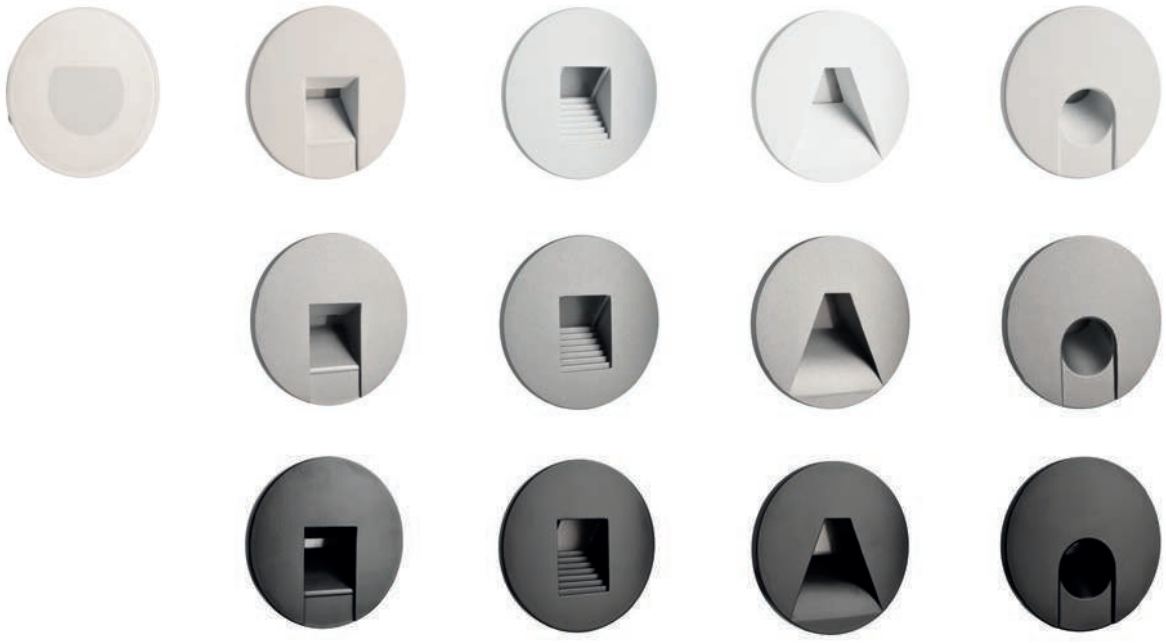

cover

930481	round | milky | white | H x Ø: 22 x 78 mm	**21,95 €**
930500	round square | white | H x Ø: 22 x 78 mm	**17,95 €**
930497	round step | white | H x Ø: 22 x 78 mm	**17,95 €**
930503	round trapeze | white | H x Ø: 22 x 78 mm	**17,95 €**
930494	round round | white | H x Ø: 22 x 78 mm	**17,95 €**
930501	round square | aluminium| H x Ø: 22 x 78 mm	**17,95 €**
930498	round step | aluminium| H x Ø: 22 x 78 mm	**17,95 €**
930504	round trapeze | aluminium| H x Ø: 22 x 78 mm	**17,95 €**
930495	round round | aluminium| H x Ø: 22 x 78 mm	**17,95 €**
930502	round square | black | H x Ø: 22 x 78 mm	**17,95 €**
930499	round step | black | H x Ø: 22 x 78 mm	**17,95 €**
930505	round trapeze | black | H x Ø: 22 x 78 mm	**17,95 €**
930496	round round | black | H x Ø: 22 x 78 mm	**17,95 €**



page 205



page 205



page 207

reading lights





BRAHE IV

Whether as a wall lamp next to the bed, as a bedside lamp or as a floor lamp behind the reading chair – when you put the book or newspaper away, conventional reading lights often lack indirect lighting options. Here the BRAHE comes into play with its illuminated socket, which can be switched separately and creates atmospheric, indirect islands of light that provide the right light even after reading.



BRAHE I

- modern design
- individually adjustable via flexible arm and thus optimal as a reading light
- aluminium
- dimensions L x H x Ø: 310 x 80 x 25 mm
- socket L x W x H: 80 x 80 x 25 mm

item	colour	colour temperature	light current	price
341236	white	ww 3000 K	175 lm	**59,95 €**
341237	black	ww 3000 K	165 lm	**59,95 €**

100-240 Volt | 2 W | SMD | 1 LED | Ra>80 | 25° | 360°



suitable table and floor lights page 210
346015
346016
343025
343026



BRAHE IV

- modern design
- direct and indirect lighting can be switched separately
- impresses with simplicity and elegance
- aluminium
- dimensions B x Ø: 110 x 150 mm
- primary light: 2,00 W / 1 LED
- ambient light: 4,80 W / 48 LED

item	colour	colour temperature	light current	price
341242	white	ww 3000 K	490 lm	**89,99 €**
341243	black	ww 3000 K	395 lm	**89,99 €**

220-240 Volt | 2 W / 4,80 W | SMD | 1/48 LED | Ra>80 | 25° | 90°



suitable table and floor lights page 210
346015
346016
343025
343026





ALWA

The ALWA combines two luminaires in one sophisticated design: a bedside luminaire with indirect shade lighting and a reading spot. The highlight is the rotatable and swivelling arm [tilt angle: 90°], which enables the ALWA to provide targeted illumination. With its narrow beam angle of 20°, the ALWA also ensures that the person next to the bed is guaranteed not to be disturbed. We wish you a pleasant night's sleep.





ALWA I

- modern design
- flexible application possibilities due to rotatable luminaire body
- ideal as bed and reading lamp
- aluminium
- dimensions L x Ø: 110 x 30 mm
- socket L x W x H: 135 x 50 x 28 mm

item	colour	colour temperature	light current	price
341228	white	WW 3000 K	200 lm	**115,95 €**
341229	black	WW 3000 K	180 lm	**115,95 €**





page 210



page 210



page 212



page 213



page 215



page 215



page 216



page 216




page 218



page 218



page 220

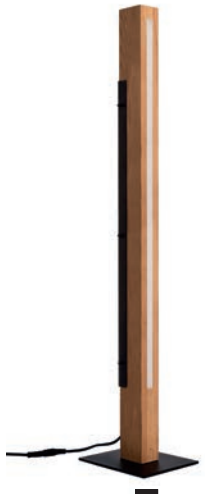

page 220

table and floor lights





BRAHE

- modern design
- direct and indirect lighting can be switched separately
- impresses with simplicity and elegance
- aluminium
- dimensions L x Ø: 455 x 150 mm
- primary light: 2,00 W / 1x LED
- ambient light: 4,80 W / 48x LED

item	colour		colour temperature		light current	price
346015	☐	white	ww	3000 K	470 lm	**122,95 €**
346016	■	black	ww	3000 K	370 lm	**122,95 €**

220-240 Volt | 2 W / 4,80 W | SMD | 1 LED | Ra>80 | 25° | 90°



suitable reading lights page 205
341242
341243
341236
341237



BRAHE

- modern design
- direct and indirect lighting can be switched separately
- impresses with simplicity and elegance
- aluminium
- dimensions L x Ø: 1387 x 305 mm
- primary light: 3,00 W / 1x LED
- ambient light: 8,00 W / 72x LED

item	colour		colour temperature		light current	price
343025	☐	white	ww	3000 K	530 lm	**199,95 €**
343026	■	black	ww	3000 K	530 lm	**199,95 €**

220-240 Volt | 3 W / 8 W | SMD | 1 LED | Ra>80 | 25° | 90°



suitable reading lights page 205
341242
341243
341236
341237



BERMUDA

Whether as a decorative element or for reading – the 38 cm high BERMUDA table lamp can be switched between the light colours warm white, neutral white and cool white as well as dimmed via an integrated touch sensor.



BERMUDA

- design by Johannes Tomm
- colour temperature selectable via touch switch
- 360° beam angle
- aluminium diecast
- dimensions H x Ø: 380 x 200 mm
- socket H x Ø: 20 x 150 mm
- infinitely dimmable via touch sensor

item	colour		colour temperature	light current	price
346018	☐	white	WW NW CW 3000 / 4000 / 5000 K	935 lm	**169,95 €**
346017	■	black	WW NW CW 3000 / 4000 / 5000 K	935 lm	**169,95 €**

100-240 50Hz Volt | SMD | 140 LED | Ra>80 | 360°



suitable
wall lights
page 170
342159
342160



suitable
wall light
IP65
page 418
731124



suitable
bollard light
IP65
page 382
733056



suitable
ground spike
lights
IP65
page 456
733060
733059







BERMUDA

- design by Johannes Tomm
- luminaire head can be tilted up to 30°
- 360° beam angle
- aluminium diecast
- dimensions L x H: 1708 x 250 mm
- socket H x Ø: 26 x 250 mm
- infinitely dimmable via touch sensor

item	colour		colour temperature		light current	price
343029	☐	white	ww	3000 K	715 lm	**189,95 €**
343028	■	black	ww	3000 K	715 lm	**189,95 €**





suitable
wall lights
page 170
342159
342160



suitable
wall light
IP65
page 418
731124



suitable
bollard light
IP65
page 382
733056



suitable
ground spike
lights
IP65
page 456
733060
733059



ADHARA


Classic design interpreted in a modern way – the ADHARA made of aluminium impresses with its classic lines, state-ofthe-art materials and high flexibility. Thanks to the three joints, ADHARA can be optimally adjusted to any situation. Its powerful LED module delivers 640/800 lumens and can also be dimmed thanks to the touch sensor. Whether in an executive's office or at a child's desk, ADHARA cuts a fine figure everywhere.



ADHARA

- practical design
- double adjustable and fixable via joints
- 3-level dimmable via touch sensor
- aluminium
- socket H x Ø: 16 x 160 mm / 22 x 180 mm

item	colour	colour temperature	light current	dimensions L x Ø	price
346030	white	ww 3000 K	950 lm	355 x 150 mm	**109,95 €**
346031	silver coloured	ww 3000 K	950 lm	355 x 150 mm	**109,95 €**
346029	black	ww 3000 K	950 lm	355 x 150 mm	**109,95 €**
346027	white	ww 3000 K	950 lm	480 x 150 mm	**169,95 €**
346028	silver coloured	ww 3000 K	950 lm	480 x 150 mm	**169,95 €**
346026	black	ww 3000 K	950 lm	480 x 150 mm	**169,95 €**



ASTEROPE

Light & shadow: Hardly any luminaire embodies this dualism more beautifully than the ASTEROPE in its various versions. The downward-opening pendant luminaire creates a multifaceted play of light and shadow on walls and ceilings that blends extravagantly yet harmoniously into any ambience.
Our tip: Combine the ASTEROPE with a gold-coloured or milky light source from the Filament series.









suitable
pendant lights
page 11
342135
342136





suitable
wall lights
page 172
341216
341217

ASTEROPE LINEAR

- metal
- dimensions H x Ø: 450 x 150 mm
- socket H x Ø: 25 x 150 mm
- incl. 2 m connection cable with switch

item	colour	price
346003	white	**115,95 €**
346004	black	**115,95 €**

220-240 Volt | 1x max. 40 W | E27 | LED

suitable illuminants on page 770, 771, 773









suitable
pendant lights
page 11
342135
342136





suitable
wall lights
page 172
341216
341217

ASTEROPE LINEAR

- metal
- dimensions H x Ø: 1600 x 210 mm
- socket H x Ø: 30 x 250 mm
- incl. 2,30 m connection cable with switch

item	colour	price
343020	white	**199,95 €**
343021	black	**199,95 €**

220-240 Volt | 1x max. 100 W | E27 | LED

suitable illuminants on page 770, 771, 773



TWISTER

Elegant design with innovative details meets unusual choice of materials: The TWISTER series combines decorative floor, table and pendant luminaires in different sizes, made entirely of plaster. We turn the cable into a design element! Completely in classic white, the luminaires are only interrupted by a red cable. This makes the TWISTER series an eye-catcher not only in living areas but also in hotels and restaurants.



TWISTER

- design by Johannes Tomm
- red textile cable
- gypsum
- easy cleaning through surface treatment
- dimensions H x Ø: 350 x 180 mm

item	colour	price
346010	☐ white	**129,95 €**

220-240 Volt | 1x max. 25 W | G9 | LED

suitable illuminants on page 766



suitable pendant lights page 70
342144
342145



TWISTER

- design by Johannes Tomm
- red textile cable
- gypsum
- easy cleaning through surface treatment
- dimensions L x H x Ø: 282 x 1500 x 280 mm
- socket H x Ø: 25 x 270 mm

item	colour	price
343017	☐ white	**219,95 €**

220-240 Volt | 1x max. 40 W | E27 | LED

suitable illuminants on page 770-773



suitable pendant lights page 70
342144
342145



MADERA

The MADERA series is made of first-class European oak wood and impresses with its modern design and mix of materials in private living areas, hotels, restaurants and many more. The noble MADERA luminaires distribute their powerful warm white light in any room and thus also cut an excellent figure as functional and high-quality lighting at reception counters and more.

MADERA



- modern, exclusive design
- manufactured in Europe from high-quality oak wood of grade A
- FSC-certified raw material oak wood
- environmentally friendly packaging
- infinitely dimmable via touch sensor
- oak wood | aluminium
- dimensions L x W x H: 40 x 60 x 510 mm
- socket L x W x H: 160 x 130 x 6 mm

item	colour	colour temperature	light current	price
346044	wood, black	ww 3000 K	420 lm	**329,95 €**

220-240 Volt | 7 W | LED | Ra>80 | + –



suitable ceiling light page 89 **348147**




suitable pendant light page 46 **342169**



suitable wall light page 196 **341248**

MADERA

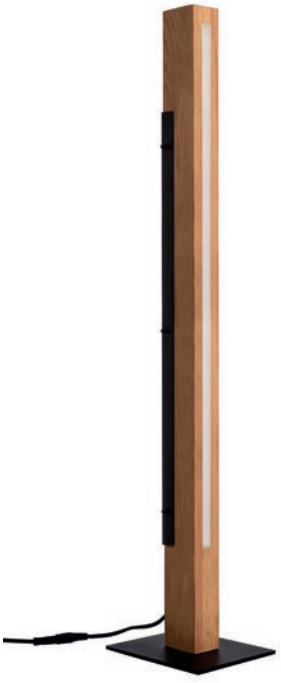

- modern, exclusive design
- manufactured in Europe from high-quality oak wood of grade A
- FSC-certified raw material oak wood
- environmentally friendly packaging
- infinitely dimmable via touch sensor
- oak wood | aluminium
- dimensions L x W x H: 40 x 60 x 1410 mm
- socket L x W x H: 250 x 180 x 6 mm

item	colour	colour temperature	light current	price
343031	wood, black	ww 3000 K	1610 lm	**529,95 €**

220-240 Volt | 19 W | LED | Ra>80 | + –



suitable ceiling light page 89 **348147**



suitable pendant light page 46 **342169**



suitable wall light page 196 **341248**





page 224



page 225



from page 226



page 228



page 229



page 230



page 231



from page 232



page 234



page 234



page 235

furniture lights



MIA

With their wide range of accessories, the versatile furniture luminaires of the MIA series offer the right solution for every situation. Whether in horizontal or vertical alignment – MIA convinces with its high light output and homogeneous illumination. It is conveniently controlled via touch dimmer or via a configurable PIR motion sensor.



MIA

- aluminium
- dimensions B x H: 38 x 8 mm
- dimmable via optional accessories

item	colour	colour temperature	light current	dimensions L	power	price
687062	silver coloured / black	WW 3000 K	210 lm	300 mm	5 W	**45,95 €**
687064	silver coloured / black	NW 4000 K	250 lm	300 mm	5 W	**45,95 €**
687070	silver coloured / black	WW 3000 K	330 lm	500 mm	8 W	**65,95 €**
687071	silver coloured / black	NW 4000 K	350 lm	500 mm	8 W	**65,95 €**
687072	silver coloured / black	WW 3000 K	800 lm	1000 mm	14 W	**119,95 €**
687073	silver coloured / black	NW 4000 K	620 lm	1000 mm	14 W	**119,95 €**





accessories

930212	touch dimmer | black	**13,95 €**
930213	IR sensor | black	**22,95 €**
930160	connector linear | black	**2,25 €**
930191	angle connector flat | black	**3,25 €**
930209	angle connector vertical | black	**3,95 €**
687117	connection cable | black | 150 mm	**2,25 €**
687118	connection cable | black | 250 mm	**2,25 €**
930243	connection cable | black | 1000 mm	**3,25 €**
930242	mounting clips adjustable | set of 2 | plastic | transparent	**4,25 €**
930214	mounting clips | set of 5 | metal | silver coloured	**1,10 €**
862037	power plug unit | 24V DC | 6 W | 1,5 m cable	**15,95 €**
862038	power plug unit | 24V DC | 24 W | 1,5 m cable	**29,95 €**
862074	power plug unit | 24V DC | 36 W | 1,5 m cable	**39,95 €**



MIA

- aluminium
- dimensions B x H: 38 x 8 mm
- dimmable via optional accessories

item	colour	colour temperature	light current	dimensions L	power	price
687074	white	WW 3000 K	210 lm	300 mm	5 W	**45,95 €**
687075	white	NW 4000 K	250 lm	300 mm	5 W	**45,95 €**
687076	white	WW 3000 K	330 lm	500 mm	8 W	**66,95 €**
687077	white	NW 4000 K	350 lm	500 mm	8 W	**66,95 €**
687078	white	WW 3000 K	800 lm	1000 mm	14 W	**119,95 €**
687079	white	NW 4000 K	620 lm	1000 mm	14 W	**109,95 €**

CV | 24 Volt | SMD | Ra>80 | 115°



accessories

930250	touch dimmer | white	**11,95 €**
930251	IR sensor | white	**24,95 €**
930247	connector linear | white	**2,25 €**
930248	angle connector flat | white	**3,25 €**
930249	angle connector vertical | white	**4,55 €**
930244	connection cable | white | 150 mm	**1,75 €**
930245	connection cable | white | 250 mm	**1,75 €**
930246	connection cable | white | 1000 mm	**2,95 €**
930242	mounting clips adjustable | set of 2 | plastic | transparent	**4,25 €**
930214	mounting clips | set of 5 | metal | silver coloured	**1,10 €**
862037	power plug unit | 24V DC | 6 W | 1,5 m cable	**15,95 €**
862038	power plug unit | 24V DC | 24 W | 1,5 m cable	**29,95 €**
862074	power plug unit | 24V DC | 36 W | 1,5 m cable	**39,95 €**





BAHAM I

- aluminium
- dimensions H x Ø: 12,50 x 62 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
687096	silver coloured brushed	WW 3000 K	240 lm	**33,95 €**

CV | 12 Volt | 2,50 W | COB | 1 LED | Ra>80 | 110° | + –

accessories

872127	power supply | 12V DC | 4,0 W	**13,95 €**
862232	power supply | 12V DC | 20,0 W	**26,95 €**
862240	power supply dimmable | 12V DC | 2,5 - 25,0 W	**64,95 €**

SIMPLE, FAST, SAFE & POWERFUL

With our pre-assembled and ready-to-connect bundles, you are optimally prepared for current and future challenges in LED technology. In particular, carpenters as well as exhibition stand and shop fitters will find the right products for their ever-growing catalogue of requirements.

We are your partner when it comes to ready-to-plug-in solutions with high lumen packages. With our powerful bundles in numerous versions and configurations, customer requirements can be implemented quickly, efficiently and reliably.



BAHAM I BUNDLE OF 3

- 3 x surface-mounted/built-in furniture luminaire BAHAM I 687099
- dimensions H x Ø: 12,5 x 62 mm
- 1 x DEKO-LIGHT power supply dimmable 862169
- dimmable via phase control or phase cut-off
- incl. 6-fold AMP distributor [extension up to 6 luminaires]

item	colour	colour temperature	light current	price
620006	silver coloured brushed	ww 3000 K	3x 240 lm	**139,95 €**

230 Volt | 3 x 2,50 W | COB | 3 x 1 LED | Ra>80 | 110° | + –

suitable pre-assembled accessories for extending the cabling on page 789



BAHAM I BUNDLE OF 5

- 5 x surface-mounted/built-in furniture luminaire BAHAM I 687099
- dimensions H x Ø: 12,5 x 62 mm
- 1 x DEKO-LIGHT power supply 862169
- dimmable via phase control or phase cut-off
- incl. 6-fold AMP distributor [extension up to 6 luminaires]

item	colour	colour temperature	light current	price
620007	silver coloured brushed	ww 3000 K	5x 240 lm	**199,95 €**

230 Volt | 5 x 2,50 W | COB | 5 x 1 LED | Ra>80 | 110° | + –

suitable pre-assembled accessories for extending the cabling on page 789

FINE I



- aluminium
- dimensions L x W x H: 60 x 60 x 5 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
687034	grey	ww 2700 K	210 lm	**33,95 €**

CV | 12 Volt | 3 W | COB | 1 LED | Ra>80 | 115°

accessories

872127	power supply | 12V DC | 4,0 W	**13,95 €**
862232	power supply | 12V DC | 20,0 W	**26,95 €**
862240	power supply dimmable | 12V DC | 2,5 - 25,0 W	**64,95 €**





FINE I BUNDLE OF 3

- 3 x furniture surface-mounted luminaire FINE I 687034
- dimensions L x W x H: 60 x 60 x 5 mm
- 1 x DEKO-LIGHT power supply 862169
- dimmable via phase control or phase cut-off
- incl. 6-fold AMP distributor [extension up to 6 luminaires]

item	colour	colour temperature	light current	price
620012	grey	ww 3000 K	3x 210 lm	**169,95 €**

230 Volt | 3x 3 W | COB | 3 x 1 LED | Ra>80 | 120° | + –

suitable pre-assembled accessories for extending the cabling on page 789





FINE I BUNDLE OF 5

- 5 x furniture surface-mounted luminaire FINE I 687034
- dimensions L x W x H: 60 x 60 x 5 mm
- 1 x DEKO-LIGHT power supply 862169
- dimmable via phase control or phase cut-off
- incl. 6-fold AMP distributor [extension up to 6 luminaires]

item	colour	colour temperature	light current	price
620013	grey	ww 3000 K	5x 210 lm	**229,95 €**

230 Volt | 5x 3 W | COB | 5 x 1 LED | Ra>80 | 120° | + –

suitable pre-assembled accessories for extending the cabling on page 789

FINE II



- aluminium
- dimensions L x W x H: 190 x 60 x 5 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
687035	grey	ww 2700 K	220 lm	**39,95 €**

CV | 12 Volt | 2,30 W | COB | 1 LED | Ra>80 | 120°

accessories

872127	power supply | 12V DC | 4,0 W	**13,95 €**
862232	power supply | 12V DC | 20,0 W	**26,95 €**
862240	power supply dimmable | 12V DC | 2,5 - 25,0 W	**64,95 €**





FINE II BUNDLE OF 3

- 3 x furniture surface-mounted luminaire FINE II 687035
- dimensions L x W x H: 190 x 60 x 5 mm
- 1 x DEKO-LIGHT power supply 862169
- dimmable via phase control or phase cut-off
- incl. 6-fold AMP distributor [extension up to 6 luminaires]

item	colour	colour temperature	light current	price
620014	grey	ww 2700 K	3x 220 lm	**199,95 €**

230 Volt | 3x 2,30 W | COB | 3 x 1 LED | Ra>80 | 120° | + –

suitable pre-assembled accessories for extending the cabling on page 789





FINE II BUNDLE OF 5

- 5 x furniture surface-mounted luminaire FINE II 687035
- dimensions L x W x H: 190 x 60 x 5 mm
- 1 x DEKO-LIGHT power supply 862169
- dimmable via phase control or phase cut-off
- incl. 6-fold AMP distributor [extension up to 6 luminaires]

item	colour	colour temperature	light current	price
620015	grey	ww 2700 K	5x 220 lm	**296,95 €**

230 Volt | 5x 2,30 W | COB | 5 x 1 LED | Ra>80 | 120° | + –

suitable pre-assembled accessories for extending the cabling on page 789

SPIEGEL ROUND



- aluminium
- dimensions L x H x Ø: 97 x 14 x 80 mm
- socket L x W: 30 x 15 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
687130	silver coloured chrome	NW 4000 K	300 lm	**54,95 €**

CV | 12 Volt | 4,50 W | SMD | 24 LED | Ra>80 | 120° | IP44

accessories

872629	power supply | 12V DC | 6,0 W	**18,95 €**
862232	power supply | 12V DC | 20,0 W	**26,95 €**
862240	power supply dimmable | 12V DC | 2,5 - 25,0 W	**64,95 €**





ROUND BUNDLE OF 3

- 3 x furniture surface-mounted luminaire ROUND 687130
- dimensions L x H x Ø: 97 x 14 x 80 mm
- 1 x DEKO-LIGHT power supply 862169
- dimmable via phase control or phase cut-off
- incl. 6-fold AMP distributor [extension up to 6 luminaires]

item	colour	colour temperature	light current	price
620016	silver coloured chrome	NW 4000 K	3x 300 lm	**219,95 €**

230 Volt | 3x 4,50 W | SMD | 3 x 24 LED | Ra>80 | 120° | + – | IP44

suitable pre-assembled accessories for extending the cabling on page 789





ROUND BUNDLE OF 5

- 5 x furniture surface-mounted luminaire ROUND 687130
- dimensions L x H x Ø: 97 x 14 x 80 mm
- 1 x DEKO-LIGHT power supply 862169
- dimmable via phase control or phase cut-off
- incl. 6-fold AMP distributor [extension up to 6 luminaires]

item	colour	colour temperature	light current	price
620017	silver coloured chrome	NW 4000 K	5x 300 lm	**314,95 €**

230 Volt | 5x 4,50 W | SMD | 5 x 24 LED | Ra>80 | 120° | + – | IP44

suitable pre-assembled accessories for extending the cabling on page 789

SPIEGEL ANGULAR



- aluminium
- dimensions L x W x H: 98 x 80 x 14 mm
- socket L x W: 30 x 15 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
687131	silver coloured chrome	NW 4000 K	300 lm	**54,95 €**

CV | 12 Volt | 4,50 W | SMD | 24 LED | Ra>80 | 120° | IP44

accessories

872629	power supply | 12V DC | 6,0 W	**18,95 €**
862232	power supply | 12V DC | 20,0 W	**26,95 €**
862240	power supply dimmable | 12V DC | 2,5 - 25,0 W	**64,95 €**





ANGULAR BUNDLE OF 3

- 3 x furniture surface-mounted luminaire ANGULAR 687131
- dimensions L x W x H: 98x 80 x 14 mm
- 1 x DEKO-LIGHT power supply 862169
- dimmable via phase control or phase cut-off
- incl. 6-fold AMP distributor [extension up to 6 luminaires]

item	colour	colour temperature	light current	price
620018	silver coloured chrome	NW 4000 K	3x 300 lm	**219,95 €**

230 Volt | 3x 4,50 W | SMD | 3 x 24 LED | Ra>80 | 120° | + – | IP44

suitable pre-assembled accessories for extending the cabling on page 789





ANGULAR BUNDLE OF 5

- 5 x furniture surface-mounted luminaire ANGULAR 687131
- dimensions L x W x H: 98 x 80 x 14 mm
- 1 x DEKO-LIGHT power supply 862169
- dimmable via phase control or phase cut-off
- incl. 6-fold AMP distributor [extension up to 6 luminaires]

item	colour	colour temperature	light current	price
620019	silver coloured chrome	NW 4000 K	5x 300 lm	**314,95 €**

230 Volt | 5x 4,50 W | SMD | 5 x 24 LED | Ra>80 | 120° | + – | IP44

suitable pre-assembled accessories for extending the cabling on page 789

SPIEGEL LINE

Reflections in the most beautiful light: the LINE I and LINE II luminaires distribute their warm white light over a large area and without shading on mirrors up to 10 mm thick. If required, the LINE series can also be used as an elegant surface-mounted luminaire for various pieces of furniture using the adapter supplied.



SPIEGEL LINE I

- aluminium
- dimensions L x W x H: 312 x 100 x 67 mm
- socket L x W x H: 100 x 60 x 67 mm
- dimmable via optinional power supply
- incl. multi functional fixation
  max. 10 mm deep [mirror, mounting]

item	colour	colour temperature	light current	price
687065	silver coloured chrome	ww 3000 K	380 lm	**75,95 €**

CV | 12 Volt | 8 W | SMD | 39 LED | Ra>80 | 120° | IP44

accessories

872632	power supply | 12V DC | 12,0 W	**22,95 €**
862232	power supply | 12V DC | 20,0 W	**26,95 €**
862240	power supply dimmable | 12V DC | 2,5 - 25,0 W	**64,95 €**





LINE I BUNDLE OF 2

- 2 x furniture surface-mounted luminaire LINE I 687065
- dimensions L x W x H: 312 x 100 x 67 mm
- 1 x DEKO-LIGHT power supply 862170
- dimmable via phase control or phase cut-off
- incl. 6-fold AMP distributor [extension up to 6 luminaires]

item	colour	colour temperature	light current	price
620020	silver coloured chrome	ww 3000 K	2x 380 lm	**229,95 €**

230 Volt | 2x 8 W | SMD | 2 x 39 LED | Ra>80 | 120° | + − | IP44

suitable pre-assembled accessories for extending the cabling on page 789



SPIEGEL LINE II

- aluminium
- dimensions L x W x H: 512 x 100 x 67 mm
- socket L x W x H: 100 x 60 x 67 mm
- dimmable via optinional power supply
- incl. multi functional fixation
  max. 10 mm deep [mirror, mounting]

item	colour	colour temperature	light current	price
687063	silver coloured chrome	ww 3000 K	550 lm	**96,95 €**

CV | 12 Volt | 12 W | SMD | 66 LED | Ra>80 | 120° | IP44

accessories

872632	power supply | 12V DC | 12,0 W	**22,95 €**
862232	power supply | 12V DC | 20,0 W	**26,95 €**
862240	power supply dimmable | 12V DC | 2,5 - 25,0 W	**64,95 €**





LINE II BUNDLE OF 2

- 2 x furniture surface-mounted luminaire LINE II 687063
- dimensions L x W x H: 512 x 100 x 67 mm
- 1 x DEKO-LIGHT power supply 862170
- dimmable via phase control or phase cut-off
- incl. 6-fold AMP distributor [extension up to 6 luminaires]

item	colour	colour temperature	light current	price
620021	silver coloured chrome	ww 3000 K	2x 550 lm	**249,95 €**

230 Volt | 2x 12 W | SMD | 2 x 66 LED | Ra>80 | 120° | + − | IP44

suitable pre-assembled accessories for extending the cabling on page 789





LUCY II


- aluminium
- dimensions L x W x H x Ø: 325 x 185 x 40 x 12 mm
- socket B: 35 mm
- dimmable via optinional power supply

item	colour	colour temperature	light current	price
688003	grey	WW 3000 K	400 lm	**42,95 €**

CV | 12 Volt | 5,40 W | SMD | 18 LED | Ra>80 | 120° | 270°

accessories

872632	power supply | 12V DC | 12,0 W	**22,95 €**
862232	power supply | 12V DC | 20,0 W	**26,95 €**
862240	power supply dimmable | 12V DC | 2,5 - 25,0 W	**64,95 €**



QUADRO POINT

- stainless steel
- dimensions L x W x H: 70 x 70 x 6,5 mm

item	colour	colour temperature	light current	price
686940	silver coloured brushed	NW 4500 K	30 lm	**39,95 €**

CV | 12 Volt | 0,60 W | LED | Ra>80 | 60° | 56 | 7

accessories


872127	power supply | 12V DC | 4,0 W	**13,95 €**




LUCKYLITE PRO - BATTERY POWERED

- plastic
- dimensions L x W x H: 100,0 x 10,6 x 70,0 mm
- motion sensor

item	colour	colour temperature	price
687095	silver coloured	NW 4000 K	**54,95 €**



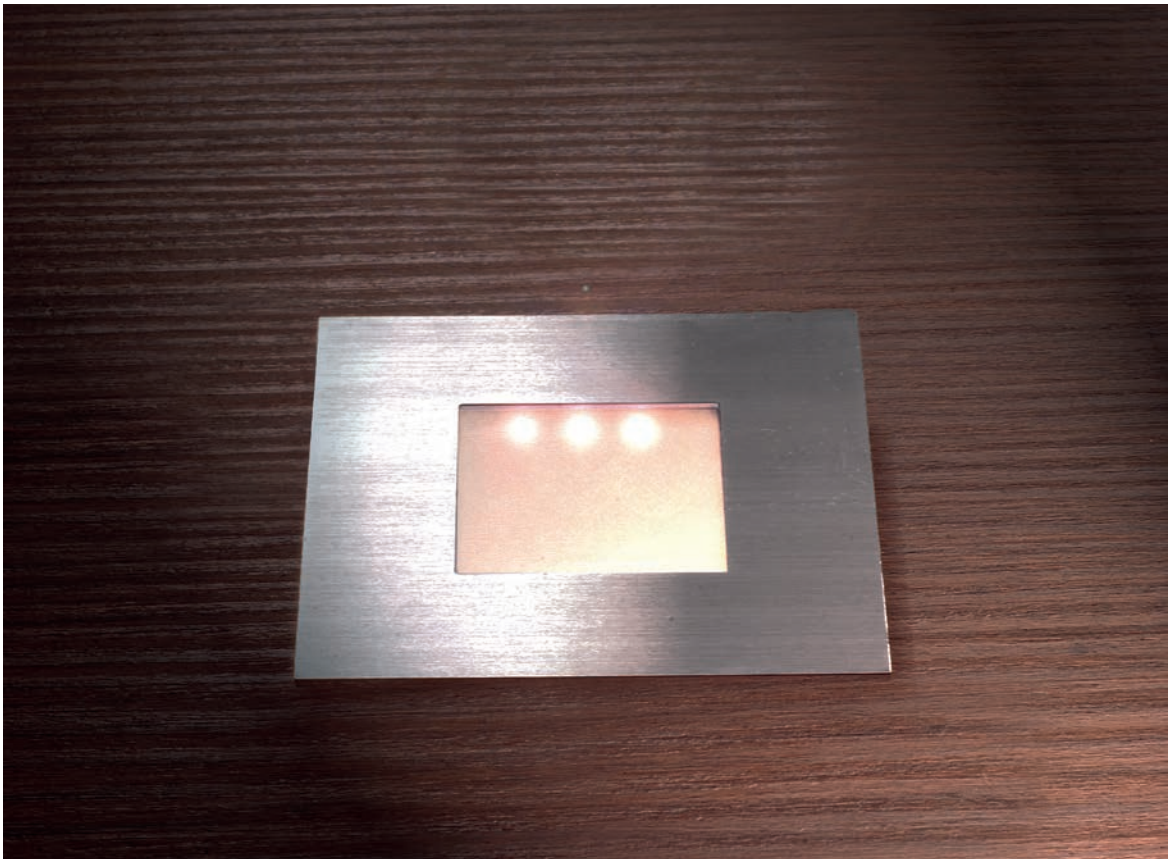



page 239



page 240



page 240



page 242



page 242

showcase lights



HERCULIS

Small helpers, big effect. With HERCULIS display luminaires in high-quality aluminium housings, you can reach all corners of a showcase. The luminaire head with its 40° beam angle can be freely rotated and swivelled in any direction. In addition, the intelligent cable routing and the ready-to-plugin system allow easy surface and recessed mounting in showcases, counters, sales areas or in the living room.











HERCULIS MAGNETIC




- design optimised for cabinets and showcases
- high performance despite compact design
- ready-to-plug-in system
- rotatable and swivelling head
- flexible mounting thanks to magnets
- aluminium diecast
- dimensions L x Ø: 42 x 31 mm
- socket H x Ø: 5 x 31 mm

item	colour		colour temperature		light current	price
688026		silver coloured	WW	3000 K	100 lm	**57,95 €**
688025		black	WW	3000 K	100 lm	**57,95 €**
688028		silver coloured	NW	4000 K	105 lm	**57,95 €**
688027		black	NW	4000 K	105 lm	**57,95 €**



accessories

930594	power supply, ready to plug in incl. 3-way distributor	**25,95 €**
930592	power supply, ready to plug in incl. 6-way distributor	**35,95 €**

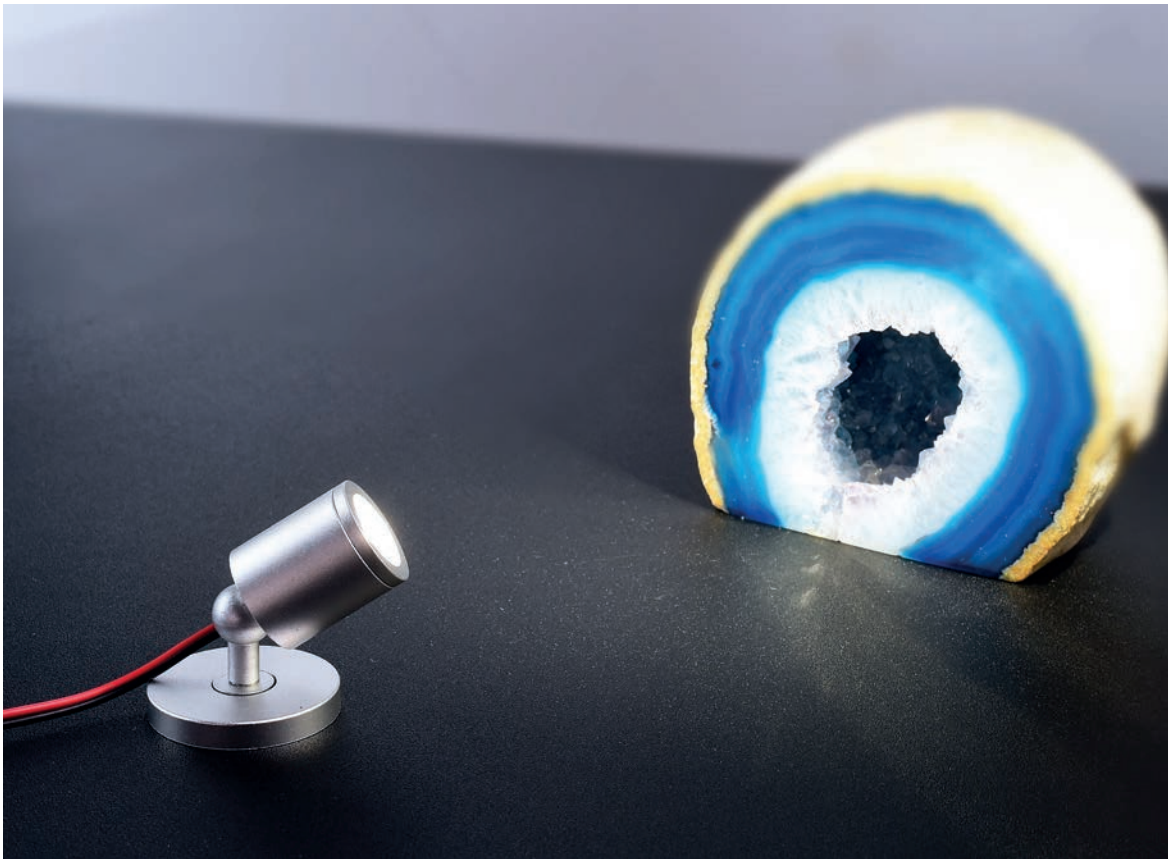

HERCULIS SMALL

- design optimised for cabinets and showcases
- high performance despite compact design
- for surface and recessed mounting thanks to intelligent cable routing
- ready-to-plug-in system
- rotatable and swivelling head
- aluminium diecast
- dimensions L x Ø: 150 x 39 mm
- socket H x Ø: 5 x 39 mm



item	colour		colour temperature		light current	price
688030		silver coloured	WW	3000 K	100 lm	**79,95 €**
688029		black	WW	3000 K	100 lm	**79,95 €**
688033		silver coloured	NW	4000 K	100 lm	**79,95 €**
688031		black	NW	4000 K	100 lm	**79,95 €**



accessories


930594	power supply, ready to plug in incl. 3-way distributor	**25,95 €**
930592	power supply, ready to plug in incl. 6-way distributor	**35,95 €**

HERCULIS BIG

- design optimised for cabinets and showcases
- high performance despite compact design
- for surface and recessed mounting thanks to intelligent cable routing
- ready-to-plug-in system
- rotatable and swivelling head
- aluminium diecast
- dimensions L x Ø: 250 x 39 mm
- socket H x Ø: 5 x 39 mm



item	colour		colour temperature		light current	price
688035		silver coloured	WW	3000 K	100 lm	**79,95 €**
688034		black	WW	3000 K	100 lm	**79,95 €**
688037		silver coloured	NW	4000 K	100 lm	**79,95 €**
688036		black	NW	4000 K	100 lm	**79,95 €**



accessories

930594	power supply, ready to plug in incl. 3-way distributor	**25,95 €**
930592	power supply, ready to plug in incl. 6-way distributor	**35,95 €**



HERCULIS DOUBLE



- design optimised for cabinets and showcases
- high performance despite compact design
- for surface and recessed mounting thanks to intelligent cable routing
- ready-to-plug-in system
- rotatable and swivelling head
- aluminium diecast
- dimensions L x Ø: 200 x 39 mm
- socket H x Ø: 5 x 39 mm

item	colour		colour temperature		light current	price
688039		silver coloured	WW	3000 K	185 lm	**115,95 €**
688038		black	WW	3000 K	185 lm	**115,95 €**
688041		silver coloured	NW	4000 K	195 lm	**115,95 €**
688040		black	NW	4000 K	195 lm	**115,95 €**



accessories


930594	power supply, ready to plug in incl. 3-way distributor	**25,95 €**
930592	power supply, ready to plug in incl. 6-way distributor	**35,95 €**

HERCULIS TRIPLE



- design optimised for cabinets and showcases
- high performance despite compact design
- for surface and recessed mounting thanks to intelligent cable routing
- ready-to-plug-in system
- rotatable and swivelling head
- aluminium diecast
- dimensions L x Ø: 250 x 39 mm
- socket H x Ø: 5 x 39 mm

item	colour		colour temperature		light current	price
688043		silver coloured	WW	3000 K	263 lm	**135,95 €**
688042		black	WW	3000 K	263 lm	**135,95 €**
688045		silver coloured	NW	4000 K	290 lm	**135,95 €**
688044		black	NW	4000 K	290 lm	**135,95 €**



accessories

930594	power supply, ready to plug in incl. 3-way distributor	**25,95 €**
930592	power supply, ready to plug in incl. 6-way distributor	**35,95 €**



page 247

page 249



page 251



page 252



page 253



page 255



page 257



page 259



page 261



page 263



page 265

office lights





D PROFESSION DOWN

Thanks to their flexible control options, you can use the D PROFESSION pendant luminaires in both private and commercial applications. In the private sector, the dimmable down version creates a great lighting mood that harmonises perfectly with its modern design.







D PROFESSION DOWN

- powerful light output
- UGR <19
- ideal for home office or dining / living area
- aluminium
- dimensions L x W x H: 1177 x 53 x 53 mm
- socket L x W x H: 560 x 65 x 38 mm
- max. suspension: 3000 mm

item	colour		colour temperature		light current	control	price
620107	☐	white	NW	4000 K	3165 lm	phase control or phase cut-off	**359,95 €**
620110	☐	silver coloured	NW	4000 K	3165 lm	phase control or phase cut-off	**359,95 €**
620103	■	black	NW	4000 K	3165 lm	phase control or phase cut-off	**359,95 €**
620106	☐	white	NW	4000 K	3165 lm	1-10V	**369,95 €**
620109	☐	silver coloured	NW	4000 K	3165 lm	1-10V	**369,95 €**
620102	■	black	NW	4000 K	3165 lm	1-10V	**369,95 €**
620105	☐	white	NW	4000 K	3165 lm	DALI Bus according to IEC62386 DALI 1	**389,95 €**
620108	☐	silver coloured	NW	4000 K	3165 lm	DALI Bus according to IEC62386 DALI 1	**389,95 €**
620057	■	black	NW	4000 K	3165 lm	DALI Bus according to IEC62386 DALI 1	**389,95 €**





light distribution curve



D PROFESSION UP AND DOWN

Thanks to their flexible control options, you can use the D PROFESSION pendant luminaires in both private and commercial applications. The UP and Down version emits its light in two directions. While the upward LEDs create a pleasant, indirect room light, the downward LEDs provide a defined, powerful and UGR-compliant office and task light for desks and more.






D PROFESSION UP AND DOWN

- powerful light output
- UGR <19
- ideal for home office or dining / living area
- aluminium
- dimensions L x W x H: 1177 x 53 x 53 mm
- socket L x W x H: 560 x 65 x 38 mm
- max. suspension: 3000 mm

item	colour		colour temperature		light current	control	price
620111	☐	white	NW	4000 K	7180 lm	phase control or phase cut-off	**429,95 €**
620104	☐	silver coloured	NW	4000 K	7180 lm	phase control or phase cut-off	**429,95 €**
620112	■	black	NW	4000 K	7180 lm	phase control or phase cut-off	**429,95 €**
620114	☐	white	NW	4000 K	7180 lm	1-10V	**429,95 €**
620113	☐	silver coloured	NW	4000 K	7180 lm	1-10V	**429,95 €**
620115	■	black	NW	4000 K	7180 lm	1-10V	**429,95 €**
620117	☐	white	NW	4000 K	7180 lm	DALI Bus according to IEC62386 DALI 1	**459,95 €**
620116	☐	silver coloured	NW	4000 K	7180 lm	DALI Bus according to IEC62386 DALI 1	**459,95 €**
620118	■	black	NW	4000 K	7180 lm	DALI Bus according to IEC62386 DALI 1	**459,95 €**





light distribution curve



OFFICE THREE DALI 2.0

The pendant luminaire is a matching addition to the OFFICE THREE MOTION floor lamp. As the glare value is less than 10, this technically sophisticated luminaire can almost be described as completely glare-free. The upward-facing LEDs create ambient light, while the downward-facing LEDs shine clearly defined and powerful light onto the work area.







OFFICE THREE DALI 2.0

- aluminium
- dimensions L x W x H: 1179 x 64 x 35 mm
- socket L x W x H: 600 x 57 x 35 mm
- max. suspension: 2500 mm
- UGR<10
- dimmable via DALI Bus according to IEC62386 DALI 2.0

item	colour		colour temperature		light current	price
342147		white	NW	4000 K	7000 lm	**589,95 €**
342146		aluminium	NW	4000 K	7000 lm	**589,95 €**





light distribution curve



suitable
floor lights
page 263
343024
343023



LED EVENT-PANEL TRANSPARENT RGBW


- aluminium
- dimensions L x W x H: 1195 x 295 x 14 mm
- dimmable via optional controller

item	colour		colour temperature	light current	price
342158	■	black clear / transparent	RGB WW 4000 K	4220 lm	**279,95 €**
620032	□	white clear / transparent	RGB NW 4000 K	4265 lm	**279,95 €**
620031	■	black clear / transparent	RGB NW 4000 K	4265 lm	**279,95 €**



optionales accessories

862164	power supply | 24V DC | 75,0 W	**82,95 €**
843059	RF controller Set RGB+White | 12/24/48V	**119,95 €**
843010	DALI LED PWM dimmer 4 channel	**129,95 €**
843000	DMX controller Art-4	**229,95 €**
843269	DMX dimmer OLED dimmer 4	**124,95 €**
843053	Quasar PWM-easy	**149,95 €**



light distribution curve

LED PANEL TRANSPARENT ROUND

The special feature of this pendant luminaire is the transparent light body. When switched off, the surface is almost completely transparent. When the light is switched on, the disc distributes the light almost glare-free. With a glare value [UGR] of less than 19, this pendant luminaire is absolutely suitable for office use. Bright, efficient and with an extraordinary design, this luminaire stands out in any office setting.




LED PANEL TRANSPARENT ROUND

- aluminium
- dimensions H x Ø: 12,50 x 580 mm
- socket H x Ø: 45,00 x 250 mm
- max. suspension: 1500 mm
- UGR <19
- dimmable via phase control or phase cut-off
- almost transparent when switched off

item	colour		colour temperature		light current	price
342091		white	WW	3000 K	5100 lm	**379,95 €**
342094		white	NW	4000 K	5600 lm	**379,95 €**
342090		aluminium	WW	3000 K	5100 lm	**379,95 €**
342093		aluminium	NW	4000 K	5600 lm	**379,95 €**
342089		black	WW	3000 K	5100 lm	**379,95 €**
342092		black	NW	4000 K	5600 lm	**379,95 €**





light distribution curve



suitable floor light
page 259
343022



LED PANEL TRANSPARENT

The LED pendant luminaire has a transparent glass for direct and indirect light distribution, which is almost transparent when switched off. When the light is switched on, the glass distributes the light almost glare-free. With a glare value [UGR] of less than 19, this pendant luminaire is absolutely suitable for office use. Bright, efficient and with an extraordinary design, this luminaire not only stands out in any office setting.



LED PANEL TRANSPARENT

- aluminium
- dimensions L x W x H: 1195 x 295 x 12 mm
- socket L x W x H: 580 x 80 x 40 mm
- max. suspension: 1800 mm
- UGR <19
- dimmable via phase control or phase cut-off
- almost transparent when switched off
- panel designed to IP40

item	colour	colour temperature	light current	price
342221	white	WW NW 3000/4000 K	5600/6100 lm	**349,95 €**
342220	aluminium	WW NW 3000/4000 K	5600/6100 lm	**349,95 €**
342219	black	WW NW 3000/4000 K	5600/6100 lm	**319,95 €**

220-240 Volt | 50 W | SMD | 476 LED | Ra>90 | IP20/40



suitable floor light page 259 **343022**



motion sensor
and daylight sensor

MOTION SENSOR

- the luminaire switches on automatically when there is movement
- without movement, the brightness is reduced to 30% after 30 min
- without movement, the luminaire switches off after 30 min.

DAYLIGHT SENSOR

- switch on the luminaire and dim it to the desired brightness dim [this setting is saved by the daylight sensor as the saves this setting as default]
- if the ambient light changes, the sensor adjusts the brightness to the stored standard [10% tolerance]





touch dimmer




OFFICE ONE + MOTION

- UGR<19
- SDCM <3
- service life 50.000h L80B10
- aluminium
- dimensions L x W x H: 1950 x 310 x 30 mm
- socket L x W: 460 x 300 mm
- gap size socket: 100 mm
- dimmable via touch sensor
- incl. 1,5 m connection cable with connector and device connector C21

item	colour	colour temperature	light current	sensor system	price
343034	aluminium	WW 3000 K	6700 lm		**819,95 €**
343030	aluminium	NW 4000 K	7400 lm		**819,95 €**
343035	aluminium	WW 3000 K	6700 lm	motion and daylight sensor	**949,95 €**
343032	aluminium	NW 4000 K	7400 lm	motion and daylight sensor	**949,95 €**





light distribution curve


DELL



touch dimmer




OFFICE ONE TRANSPARENT

- UGR<19
- service life 50.000h L80B10
- aluminium
- dimensions L x W x H: 1950 x 310 x 20 mm
- socket L x W: 460 x 30 mm
- dimmable via touch sensor
- almost transparent when switched off
- incl. 2,5 m connection cable with connector

item	colour	colour temperature	light current	price
343022	aluminium	NW 4000 K	6200 lm	**819,95 €**

100-277 Volt | 50 W | SMD | 180 LED | Ra>80 | 150°/150°



light distribution curve



suitable pendant lights page 255
342221
342220
342219





rotary switch




OFFICE TWO

- UGR<19
- SDCM <3
- service life 50.000h L80B10
- aluminium
- dimensions L x W x H: 1950 x 310 x 42 mm
- socket L x W: 450 x 270 mm
- dimmable via rotary switch
- incl. 2,5 m connection cable with mains plug

item	colour	colour temperature	light current	price
343016	aluminium	NW 4000 K	8300 lm	**749,95 €**





light distribution curve

OFFICE THREE MOTION

A modern floor luminaire for office spaces with modern control technology. When movement is detected, the minimalist luminaire switches on automatically. In addition, the OFFICE THREE MOTION adapts to the existing daylight conditions and regulates the brightness for relaxed working even over longer periods of time. The motion detector and the daylight sensor can be deactivated separately from each other. The direct and indirect light components can be controlled separately. The luminaire is particularly glare-free thanks to UGR<6 and ideal for illuminating individual work-stations.



motion sensor
and daylight sensor

MOTION SENSOR

- the luminaire switches on automatically when there is movement
- without movement, the brightness is reduced to 30% after 30 min
- without movement, the luminaire switches off after 30 min.


DAYLIGHT SENSOR

- switch on the luminaire and dim it to the desired brightness dim [this setting is saved by the daylight sensor as the saves this setting as default]
- if the ambient light changes, the sensor adjusts the brightness to the stored standard [10% tolerance]





touch panel

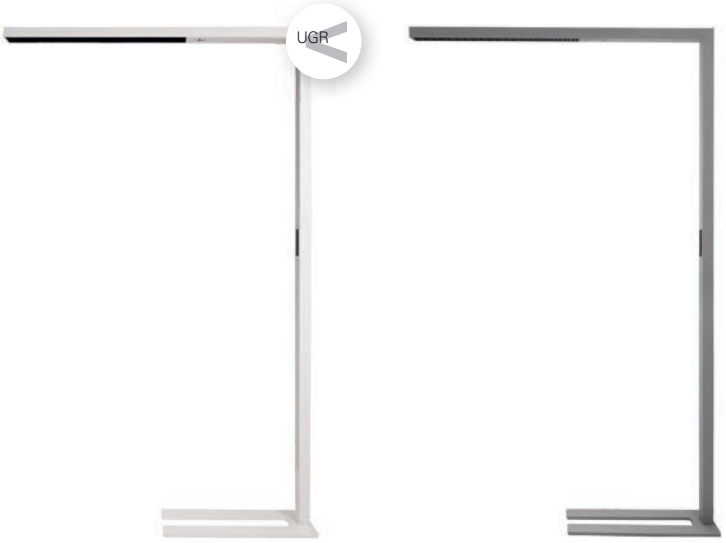




OFFICE THREE MOTION


- UGR<6
- SDCM <3
- service life 50.000h L80B10
- optimal for single workstations
- aluminium
- dimensions L x W x H: 1950 x 64 x 1056 mm
- socket L x W: 500 x 225 mm
- gap size socket: 100 mm
- direct and indirect light
  separately dimmable and switchable via touch panel
- motion sensor
- daylight sensor
- incl. 2,5 m connection cable with connector

item	colour		colour temperature		light current	price
343024		white	NW	4000 K	9600 lm	**1.099,95 €**
343023		aluminium	NW	4000 K	9600 lm	**1.099,95 €**
343033		black	NW	4000 K	9600 lm	**1.099,95 €**





suitable pendant lights
page 251
342147
342146



light distribution curve



OFFICE THREE MOTION CCT

The OFFICE THREE MOTION is our bestseller for stylish office lighting – and now even more versatile. The new OFFICE THREE MOTION CCT now not only controls the brightness depending on the existing daylight conditions, but also the light colour in the range of 3,000 to 5,700 K [CCT: Correlated Colour Temperature]. In addition to the integrated motion and daylight sensors, the modern free-standing luminaire also has a touch panel for selecting the lighting modes [up, down, up and down]. This way, you can work even more relaxed – even over longer periods of time.

new



touch panel



OFFICE THREE MOTION CCT


- UGR<6
- SDCM <3
- service life 50.000h L80B10
- optimal for single workstations
- aluminium
- dimensions L x W x H: 1950 x 64 x 1056 mm
- socket L x W: 500 x 225 mm
- gap size socket: 100 mm
- light color adjustable via touch panel
- direct and indirect light
  separately dimmable and switchable via touch panel
- motion sensor
- daylight sensor
- incl. 2,5 m connection cable with connector

item	colour	colour temperature	light current	price
343036	black	ww cw 3000-5700 K	8700 lm	**1.249,95 €**

110-240 Volt | 80 W | 528 LED | Ra>80 | 50°



suitable pendant lights page 251
342147
342146



light distribution curve



page 269



page 271

hall floodlight





ALUDRA

Whether in high-bay warehouses, large sales areas or s pacious presentation areas – the pendant luminaires of the ALUDRA series present themselves as universal highbay luminaires for use at great heights. Thanks to their high luminous intensity, wide beam angle and IK10 impact resistance class, the ALUDRA luminaires provide functional lighting for large areas safely and reliably.



ALUDRA

- high luminous intensity
- optimum illumination for e.g. warehouses or sales areas
- aluminium
- incl. 3 m connection cable
- DALI Bus according to IEC62386 DALI 2 [only for item number 732141 & 732142]

item	colour	colour temperature	light current	dimensions H x Ø	power	control	price
732138	black	CW 5000 K	15030 lm	153 x 360 mm	100 W		**299,95 €**
732139	black	CW 5000 K	24450 lm	165 x 360 mm	160 W		**359,95 €**
732140	black	CW 5000 K	30300 lm	178 x 405 mm	200 W		**439,95 €**
732141	black	CW 5000 K	15415 lm	153 x 360 mm	100 W	DALI Bus	**359,95 €**
732142	black	CW 5000 K	29315 lm	178 x 405 mm	200 W	DALI Bus	**529,95 €**

200-240 Volt | SMD | Ra>80 | 120° | IP65 | IK10

accessories for **732138**, **732139, 732141**


930590	reflector 60°, black	**64,95 €**
930641	suspension set 1m chain	**14,95 €**
930685	suspension set 3m chain	**24,95 €**
930686	wall mounting arm	**42,95 €**






accessories for **732140, 732142**


930642	reflector 60°, black	**84,95 €**
930641	suspension set 1m chain	**14,95 €**
930685	suspension set 3m chain	**24,95 €**
930687	wall mounting arm	**43,95 €**




light distribution curve 732138




light distribution curve 732139



light distribution curve 732140



light distribution curve 732141



light distribution curve 732142



HIGHBAY NORMAE

The energy-efficient HIGHBAY spotlights are ideal for hall lighting. Thanks to the adjustable mounting set, the spotlights can be mounted at the desired angle of inclination. With the corresponding set, there is also the option of suspending them and, if required, equipping them with asymmetrical lenses.



HIGHBAY NORMAE

- aluminium diecast
- socket L x W x H: 110 x 70 x 95 mm
- DALI Bus according to IEC62386 DALI 1.0
- incl. verstellbarem Befestigungsset

item	colour		colour temperature		light current	dimensions L x W x H	power	light source	price
732084	dunkelgrau	CW	5000 K		16700 lm	923 x 126 x 99 mm	136 W	192 LED	**399,95 €**
732085	dunkelgrau	CW	5000 K		23800 lm	1219 x 126 x 99 mm	172 W	236 LED	**499,95 €**










accessories


930295	linear Highbase lens 30°/70°	290 x 86 x 8 mm	**27,95 €**
930293	suspension set 1m chain		**39,95 €**



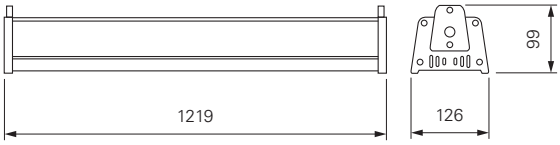





light distribution curve 732084 mit Linse 90°



light distribution curve 732085 mit Linse 90°



light distribution curve 732084 mit Linse 30°/70°



light distribution curve 732085 mit Linse 30°/70°



page 275



page 277



page 278



page 279



page 279

damp-proof luminaires





With the kind support of WIBU-SYSTEMS AG Karlsruhe

TRI PROOF SLIM


Waterproof, impact-resistant and versatile – the surface-mounted ceiling luminaires of the TRI PROOF SLIM series are flexible workhorses with an innovative design. Whether in wet areas, cellars, workshops, garages or warehouses – the IP68-certified SLIMS are impact-resistant up to IK10 and their beam angle can be continuously adjusted.



TRI PROOF SLIM


- robust plastic housing
- light direction continuously selectable by turning
- easy installation in existing fixings [e.g. pipe clamps]
- simple connection due to screwless terminals
- simple through-wiring
- incl. 4x screws, 4x dowels, 2x bracket clip, 2x quick connection clip, 1x cable connection cap

item	colour	colour temperature	light current	dimensions L x Ø	power	price
348138	white	CW 5000 K	2265 lm	700 x 39 mm	21 W	**94,95 €**
348139	white	CW 5000 K	4575 lm	1300 x 39 mm	40 W	**139,95 €**







through-wiring



light distribution curve 348138



light distribution curve 348139

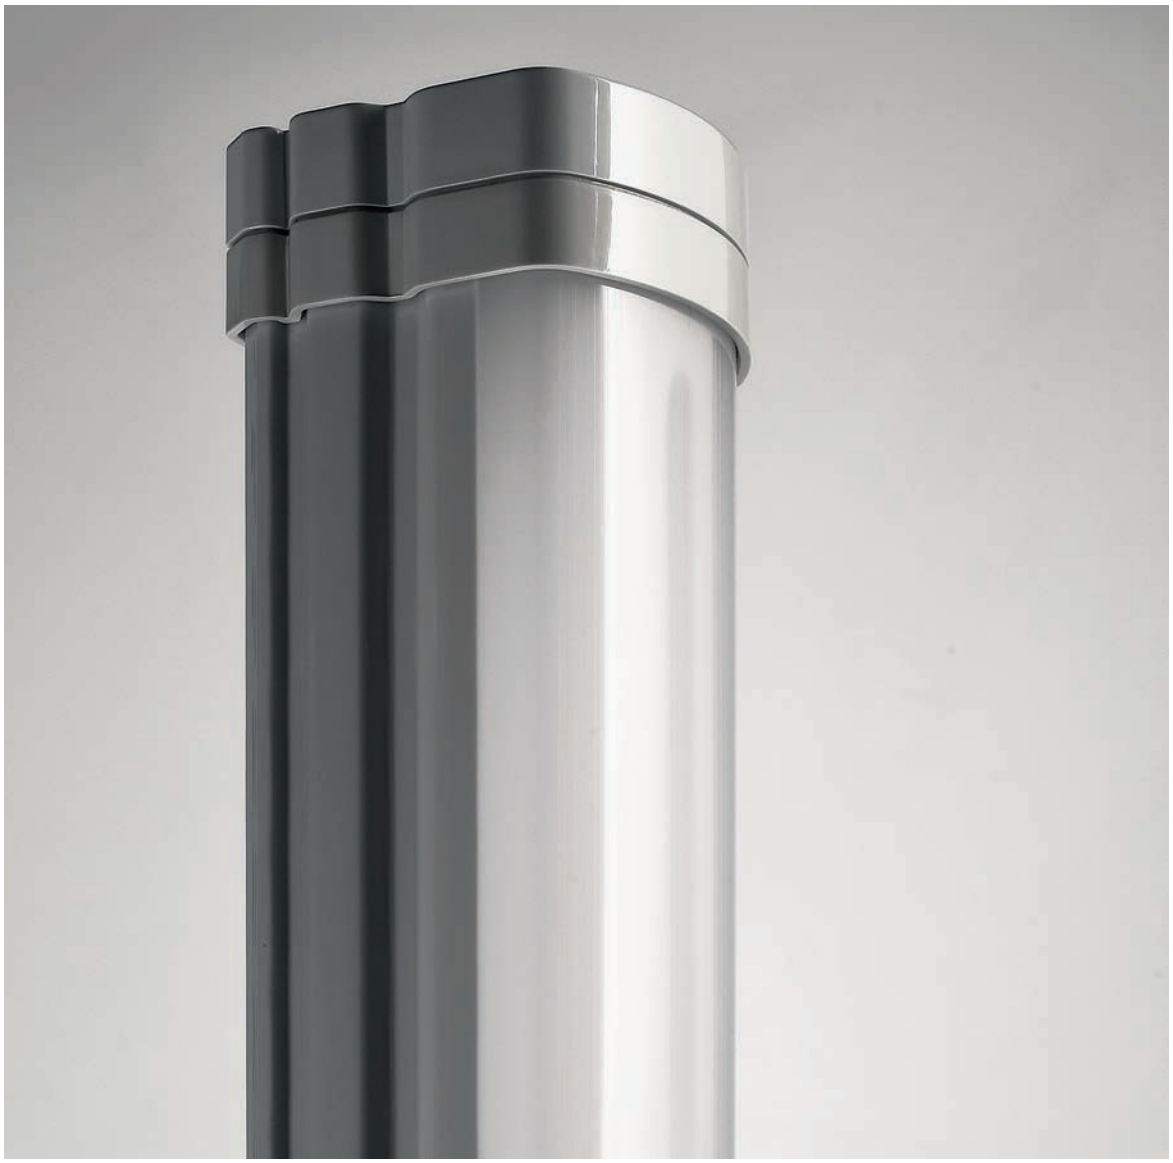

TRI PROOF

Equipped with LEDs in neutral white light colour [4000 K], the TRIPROOF LED IP65 moisture-proof luminaire consists of a light grey polycarbonate housing and a satinised polycarbonate cover in one piece. It is suitable for simple ceiling, wall or pendant mounting and is available in three different lengths.

Several can be strung together; ideal for industrial and private use, e.g. for lighting under canopies, in basements, workshops, garages, industrial halls, etc. The luminaire is provided with a simple electrical connection with plug-in terminal.





TRI PROOF

- robust plastic housing
- stackable up to 25 [730419] / 15 [730424] / 10 [730425] piece
- incl. mountings clips

item	colour	colour temperature	light current	dimensions L x W x H	power	price
730419	white	NW 4000 K	1430 lm	696 x 61 x 56 mm	16,80 W	**49,95 €**
730424	white	NW 4000 K	2980 lm	1296 x 61 x 56 mm	34,40 W	**75,95 €**
730425	white	NW 4000 K	3820 lm	1598 x 61 x 56 mm	43,60 W	**83,95 €**


180-240 Volt | SMD | Ra>80 | 120° | IP65






accessories


930071	wire suspension 2 pcs. | L: 2500 mm	**14,95 €**
930072	mounting fixation 2 pcs.	**14,95 €**



light distribution curve 730419



light distribution curve 730424



light distribution curve 730425

TRI PROOF MOTION

The ideal luminaire for environments with increased lighting requirements: whether in the garage, in the cellar or for the carport – the surface-mounted TRI PROOF MOTION luminaire is protected against wind and weather thanks to IP65 certification and is of course equipped with an integrated, invisible motion sensor that can be adjusted via dip switch.



TRI PROOF MOTION

- robust plastic housing
- motion sensor
- incl. mountings clips

item	colour	colour temperature	light current	dimensions L x W x H	power	price
730450	white	NW 4000 K	1900 lm	61 x 56 x 665 mm	18 W	**59,95 €**
730455	white	NW 4000 K	2500 lm	61 x 56 x 1145 mm	24 W	**69,95 €**


220-240 Volt | SMD | Ra>80 | 120° | | IP65 | IK08






accessories

930071	wire suspension 2 pcs. | L: 2500 mm	**14,93 €**
930072	mounting fixation 2 pcs.	**14,93 €**



light distribution curve 730450



light distribution curve 730455





SYRMA OVAL

- plastic
- dimensions L x W x H: 180 x 125 x 105 mm
- socket L x W x H: 155 x 125 x 35 mm

item	colour	price
401011	white	**9,95 €**
401013	grey	**9,95 €**
401012	black	**9,95 €**

220-240 Volt | 1x max. 42 W | E27 | LED | IP44

suitable illuminants on page 770-771





SYRMA ROUND

- plastic
- dimensions H x Ø: 110 x 190 mm
- socket H x Ø: 35 x 160 mm

item	colour	price
401014	white	**13,95 €**
401016	grey	**13,95 €**
401015	black	**13,95 €**

220-240 Volt | 1x max. 42 W | E27 | LED | IP44

suitable illuminants on page 770-771



page 282



page 282



page 283



from page 284



from page 286

emergency lights



EMERGENCY LIGHT ALMAAZ CONE



- plastic
- dimensions L x W x H: 283 x 50 x 187 mm
- single battery technology with LiFePO4 battery
- detection range 27m
- SK II / III with INSiLIA technology
- luminance 500cd/m²
- autotest function with buzzer
- rotatable housing for ceiling or wall mounting
- incl. changeable pictogram set in all directions

item	colour	colour temperature	price
348152	☐ white	NW 4500 K	**199,95 €**

230 Volt | 3 W | IP54

optional accessories





930632	special pictogram First Aid Box | green	**119,95 €**
930633	special pictogram fire extinguisher | red	**119,95 €**
930634	battery bar | 3,2V | 1500mAh	**59,95 €**

EMERGENCY LIGHT ALSAFI



- plastic
- dimensions L x W x H: 360 x 88 x 118 mm
- single battery technology with LiFePO4 battery
- detection range 16m
- SK II / III with INSiLIA technology
- luminance 500cd/m²
- autotest function with buzzer
- cut-outs for pendant mounting
- reflector with hinges
- suitable for ceiling or wall mounting
- incl. changeable pictogram set in all directions

item	colour	colour temperature	price
348140	☐ white	NW 4500 K	**189,95 €**

230 Volt | 3 W | IP54

optional accessories

930634	battery bar | 3,2V | 1500mAh	**42,95 €**

EMERGENCY LIGHT ALMAAZ FLAT



- plastic
- dimensions L x W x H: 283 x 50 x 198 mm
- single battery technology with LiFePO4 battery
- detection range 27m
- SK II / III with INSiLIA technology
- DIP switch for switching from 3 to 8h
- luminance 500cd/m²
- autotest function with buzzer
- rotatable housing for ceiling or wall mounting
- incl. changeable pictogram set in all directions

item	colour	colour temperature	price
348151	☐ white	NW 4500 K	**289,95 €**

230 Volt | 3 W | IP54

optional accessories





930632	special pictogram First Aid Box | green	**119,95 €**
930633	special pictogram fire extinguisher | red	**119,95 €**
930634	battery bar | 3,2V | 1500mAh	**59,95 €**



With the kind support of WIBU-SYSTEMS AG Karlsruhe

EMERGENCY LIGHT ALMACH FOR THE ILLUMINATION OF CORRIDORS



- Red Dot Award Winner 2017
- special lens for the illumination of escape routes or for area lighting
- plastic
- dimensions L x W x H: 192 x 101 x 57 mm
- single battery technology with LiFePO4 battery
- SK II / III with INSiLIA technology
- 3h/8h bridging time
- simple click mounting
- rotatable

item	colour	colour temperature	price
731142	☐ white	NW 4500 K	**269,95 €**

230 Volt | 1 W | | IP42

PHOTOMETRIC DATA

	a		b		c		d		c		d	
mounting height	area lighting								emergency exit lens			
	1 W	2 W	1 W	2 W	1 W	2 W	1 W	2 W	1 W	2 W	1 W	2 W
2,5 m	3,50	3,92	7,84	8,84	2,72	3,03	6,05	7,00	5,02	5,77	11,54	13,46
3,0 m	3,78	4,37	9,09	9,82	3,05	3,52	6,79	7,83	5,55	6,33	12,65	14,60
3,5 m	3,97	4,93	9,85	11,04	3,33	3,83	7,66	8,52	5,98	7,07	14,15	16,26
4,0 m	3,81	5,24	10,48	12,16	3,56	4,09	8,18	9,41	6,32	7,75	15,50	17,74
4,5 m	-	5,50	10,99	13,19	3,73	4,45	8,90	10,24	6,12	8,37	16,74	19,09
5,0 m	-	5,50	11,00	14,14	3,87	4,62	9,56	11,00	-	8,57	-	20,30
5,5 m	-	-	-	15,00	-	4,91	-	11,69	-	8,72	-	21,39
6,0 m	-	-	-	15,23	-	5,17	-	12,32	-	8,82	-	22,38
6,5 m	-	-	-	15,37	-	5,41	-	12,90	-	8,56	-	23,27
7,0 m	-	-	-	15,99	-	5,43	-	13,42	-	-	-	-
7,5 m	-	-	-	15,98	-	5,61	-	13,89	-	-	-	-


EMERGENCY LIGHT ALMACH FOR THE ILLUMINATION OF AREAS



- Red Dot Award Winner 2017
- special lens for the illumination of escape routes or for area lighting
- plastic
- dimensions L x W x H: 192 x 101 x 57 mm
- single battery technology with LiFePO4 battery
- SK II / III with INSiLIA technology
- 3h/8h bridging time
- simple click mounting
- rotatable

item	colour	colour temperature	price
731143	white	NW 4500 K	**269,95 €**

230 Volt | 1 W | | IP42

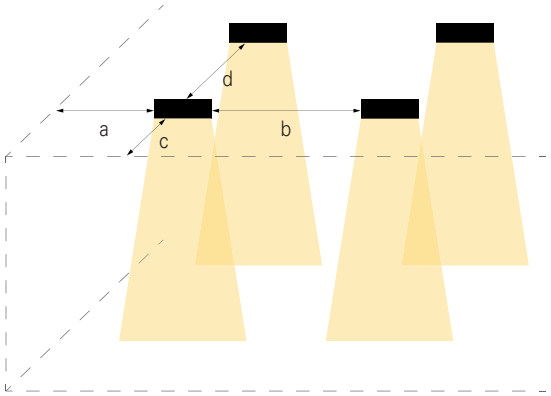

a: distance from luminaire [narrow page] to wall
b: distance from luminaire [narrow page] to luminaire [narrow page]
c: distance from luminaire [long page] to wall
d: distance from luminaire [long page] to luminaire [long page]



EMERGENCY LIGHT ALNAIR FOR THE ILLUMINATION OF AREAS

- special lens for the illumination of escape routes or for area lighting
- plastic
- dimensions H x Ø: 28 x 78 mm
- single battery technology with LiFePO4 battery
- SK II / III with INSiLIA technology
- 3h/8h bridging time

item	colour	colour temperature	price
565326	white	NW 4500 K	**289,95 €**

230 Volt | 1 W | 68 | IP42

PHOTOMETRIC DATA

mounting height	a		b		c		d		c		d	
	area lighting								emergency exit lens			
	1 W	2 W	1 W	2 W	1 W	2 W	1 W	2 W	1 W	2 W	1 W	2 W
2,5 m	3,57	4,00	8,00	9,02	2,68	3,09	6,17	7,14	5,13	5,62	11,78	13,74
3,0 m	3,84	4,45	9,24	9,99	3,11	3,45	6,90	7,96	5,64	6,43	12,87	14,85
3,5 m	3,89	5,00	10,00	11,20	3,38	3,89	7,77	8,64	6,06	7,18	14,35	15,72
4,0 m	3,73	5,13	10,62	12,32	3,48	4,14	8,28	9,53	6,16	7,85	15,70	17,16
4,5 m	2,00	5,56	11,11	13,34	3,78	4,50	9,00	10,35	-	8,12	-	19,30
5,0 m	1,92	5,55	11,11	14,28	3,91	4,66	9,66	11,11	-	8,66	-	20,50
5,5 m	-	5,50	-	14,60	-	4,95	-	11,80	-	8,80	-	21,59
6,0 m	-	-	-	-	-	-	-		-	-	-	-
6,5 m	-	-	-	-	-	-	-		-	-	-	-
7,0 m	-	-	-	-	-	-	-		-	-	-	-
7,5 m	-	-	-	-	-	-	-		-	-	-	-




EMERGENCY LIGHT ALNAIR FOR THE ILLUMINATION OF CORRIDORS

- special lens for the illumination of escape routes or for area lighting
- plastic
- dimensions H x Ø: 28 x 78 mm
- single battery technology with LiFePO4 battery
- SK II / III with INSiLIA technology
- 3h/8h bridging time

item	colour	colour temperature	price
565325	white	NW 4500 K	**289,95 €**

230 Volt | 1 W | 68 | IP42

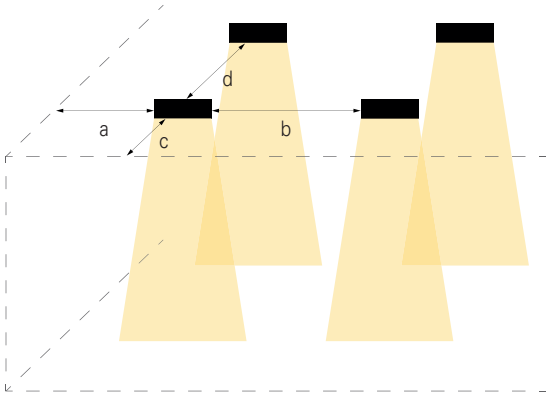

a: distance from luminaire [narrow page] to wall
b: distance from luminaire [narrow page] to luminaire [narrow page]
c: distance from luminaire [long page] to wall
d: distance from luminaire [long page] to luminaire [long page]


DEKOLIGHT

POWER RAILS

290 D LINE power rail system
318 power luminaires



page 299



page 299



page 300



page 301



page 301



page 302



page 302



page 303



page 303



page 304



page 305



page 306



page 307



page 307



page 308



page 308



page 309



page 309



page 310



page 310



page 311



page 311



page 313



page 314



page 315



page 316

D LINE power rail system



page 316





page 317

D LINE MOUNTING POWER RAIL SYSTEM 3-PHASE 230V

mounting modules	illust.	white	grey	black	page
mounting power rail L: 1000 mm	01	**710000**	**710001**	**710002**	299
mounting power rail L: 2000 mm	01	**710003**	**710004**	**710005**	299
mounting power rail L: 3000 mm	01	**710006**	**710007**	**710008**	299
mounting adapter for lights	02	**710045**	**710046**	**710047**	300
live end feeder left	03	**710009**	**710010**	**710011**	301
live end feeder right side	04	**710012**	**710013**	**710014**	301
electrical straight connector with center feed option	05	**710042**	**710043**	**710044**	302
flexible-connector left-right side	06	**710039**	**710040**	**710041**	302
electrical joint	07	**710015**	**710016**	**710017**	303
mechanical joint	08	**710018**	**710019**	**710020**	303
90°-joint left-right with exchange mechanism	09	**710036**	**710037**	**710038**	304
T-joint left-left-right with exchange mechanism	10	**710027**	**710028**	**710029**	305
T-joint right-right-left with exchange mechanism	11	**710030**	**710031**	**710032**	305
X-joint left-left-right-right	12	**710033**	**710034**	**710035**	306
cover plate built in track	13	**710077**	**-**	**710079**	307
endcap	14	**710066**	**710067**	**710068**	307
ceiling mounting bracket flex	15	**710063**	**710064**	**710065**	308
suspension clamp for track connection	16	**710057**	**710058**	**710059**	308
ceiling suspension rigid [635 mm] with canopy	17	**710078**	**710085**	**710084**	309
extension for ceiling suspension [300 mm]	17	**710086**	**710088**	**710087**	309
wire suspension bracket with ceiling rosette 1500 mm	18	**710048**	**710049**	**710050**	310
rope suspension bracket Mini mit Abhängeseil 5000 mm	19	**710094**	**710095**	**710096**	310
quick mounting bracket for grid ceilings	20	**710051**	**710052**	**710053**	313
truss adapter | silver coloured	21	**-**	**710083**	**-**	311
quick mounting clamp for exhibition stand construction	22	**-**	**-**	**710082**	311
3-circuits adapter for light installation	23	**710097**	**710098**	**710099**	314
3-circuits adapter with Multi CC power supply 250/350/450/500 mA | 6,30 - 21,00 W | 25-42V	24	**862180**	**-**	**862183**	315
3-circuits adapter with Multi CC power supply 600/700/750/800 mA | 15,00 - 33,60 W | 25-42V	24	**862181**	**-**	**862184**	315
3-circuits adapter with Multi CC power supply 850/900/950/1050 mA | 23,00 - 44,10 W | 27-42V	24	**862182**	**-**	**862185**	315
electrical outlet adapter	25	**710024**	**-**	**710026**	316
mounting adapter for additional components max. 10kg	26	**710054**	**710055**	**710056**	316
signs hook, max. load 5kg	27	**710060**	**710061**	**710062**	317


ILLUSTRATIONS WITH PLANNING RELEVANT DIMENSIONS


01


02


03



04



05



06



07


08


09



10



11



12



13



14



15



16


17



18



19



20



21


22


23


24


25


26


27


D LINE BUILT IN POWER RAL SYSTEM 3-PHASE 230V

built in modules	illust.	white	illust.	cover	page
built in power rail L:1000 mm	01	**710069**		-	299
built in power rail L: 2000 mm	01	**710070**		-	299
built in power rail L: 3000 mm	01	**710071**		-	299
live end feeder left	02	**710009**	18	**710089**	301
live end feeder right side	03	**710012**	18	**710089**	301
electrical straight connector with center feed option	04	**710042**	19	**710090**	302
electrical joint	05	**710015**		-	303
mechanical joint	06	**710018**		-	303
90°-joint left-right	07	**710036**	20	**710091**	304
T-joint left-left-right	08	**710027**	21	**710093**	305
T-joint right-right-left	09	**710030**	21	**710093**	305
X-joint left-left-right-right	10	**710033**	22	**710092**	306
cover plate built in track	11	**710077**			307
endcap	12	**710066**		-	307
3-circuits adapter for light installation	13	**710097**		-	314
3-circuits adapter with Multi CC power supply 250/350/450/500 mA | 6,30 - 21,00 W | 25-42V	14	**862180**			315
3-circuits adapter with Multi CC power supply 600/700/750/800 mA | 15,00 - 33,60 W | 25-42V	14	**862181**			315
3-circuits adapter with Multi CC power supply 850/900/950/1050 mA | 23,00 - 44,10 W | 27-42V	14	**862182**			315
electrical outlet adapter	15	**710024**		-	316
mounting adapter for additional components max. 10kg	16	**710054**		-	316
signs hook, max. load 5kg	17	**710060**		-	317



710033






710092


Unlike other systems, you will not need any additional or special electrical components such as feeders, connectors, corners or T-connectors for the recessed tracks in the future. All standard components of the system are used and only the matching plastic cover is exchanged, and the recessed version is ready. This simplifies stock-keeping and gives significantly more flexibility here as well.

ILLUSTRATIONS WITH PLANNING RELEVANT DIMENSIONS

01



02



03



04



05


06


07



08



09



10


11


12



13



14



15



16



17


18


19


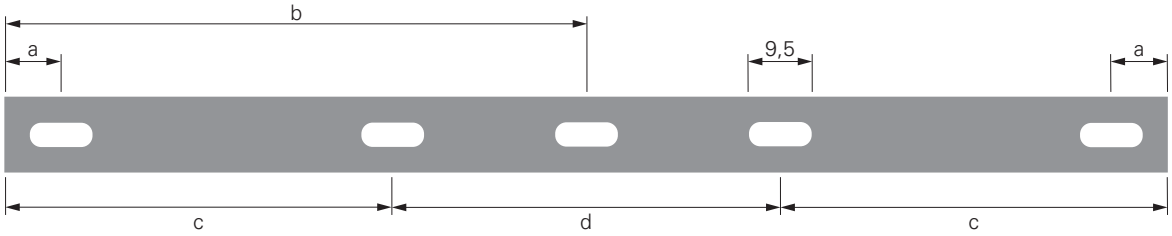
20


21


22


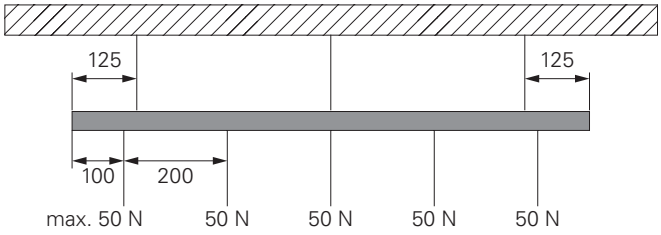
FIXING POINTS

power rail	a	b	c	d
1000 mm	125 mm			
2000 mm	125 mm	998 mm		
3000 mm	125 mm		914 mm	1167 mm




MECHANICAL LOAD TRACK POWER RAIL 1000 MM

50 N ≙ 5,09 kg
dimension in mm





MECHANICAL LOAD TRACK POWER RAIL 2000/3000 MM


50 N ≙ 5,09 kg
dimension in mm

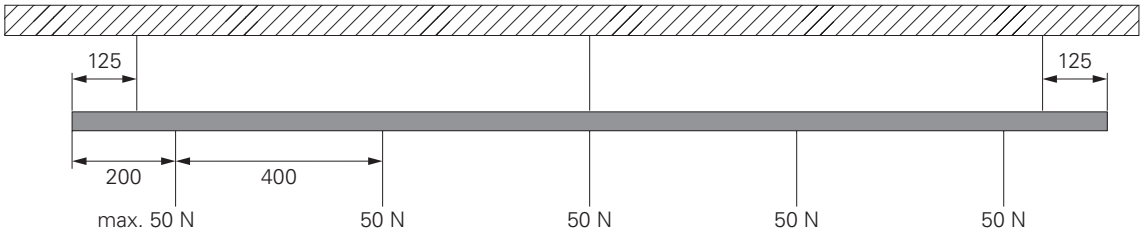

PLANNING GUIDE D LINE TRACK SYSTEM 3-PHASE 230V




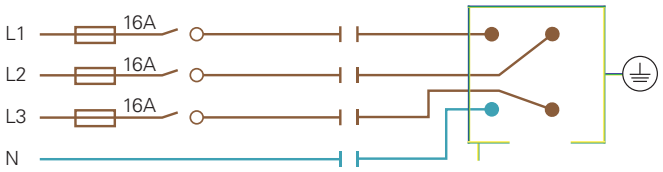

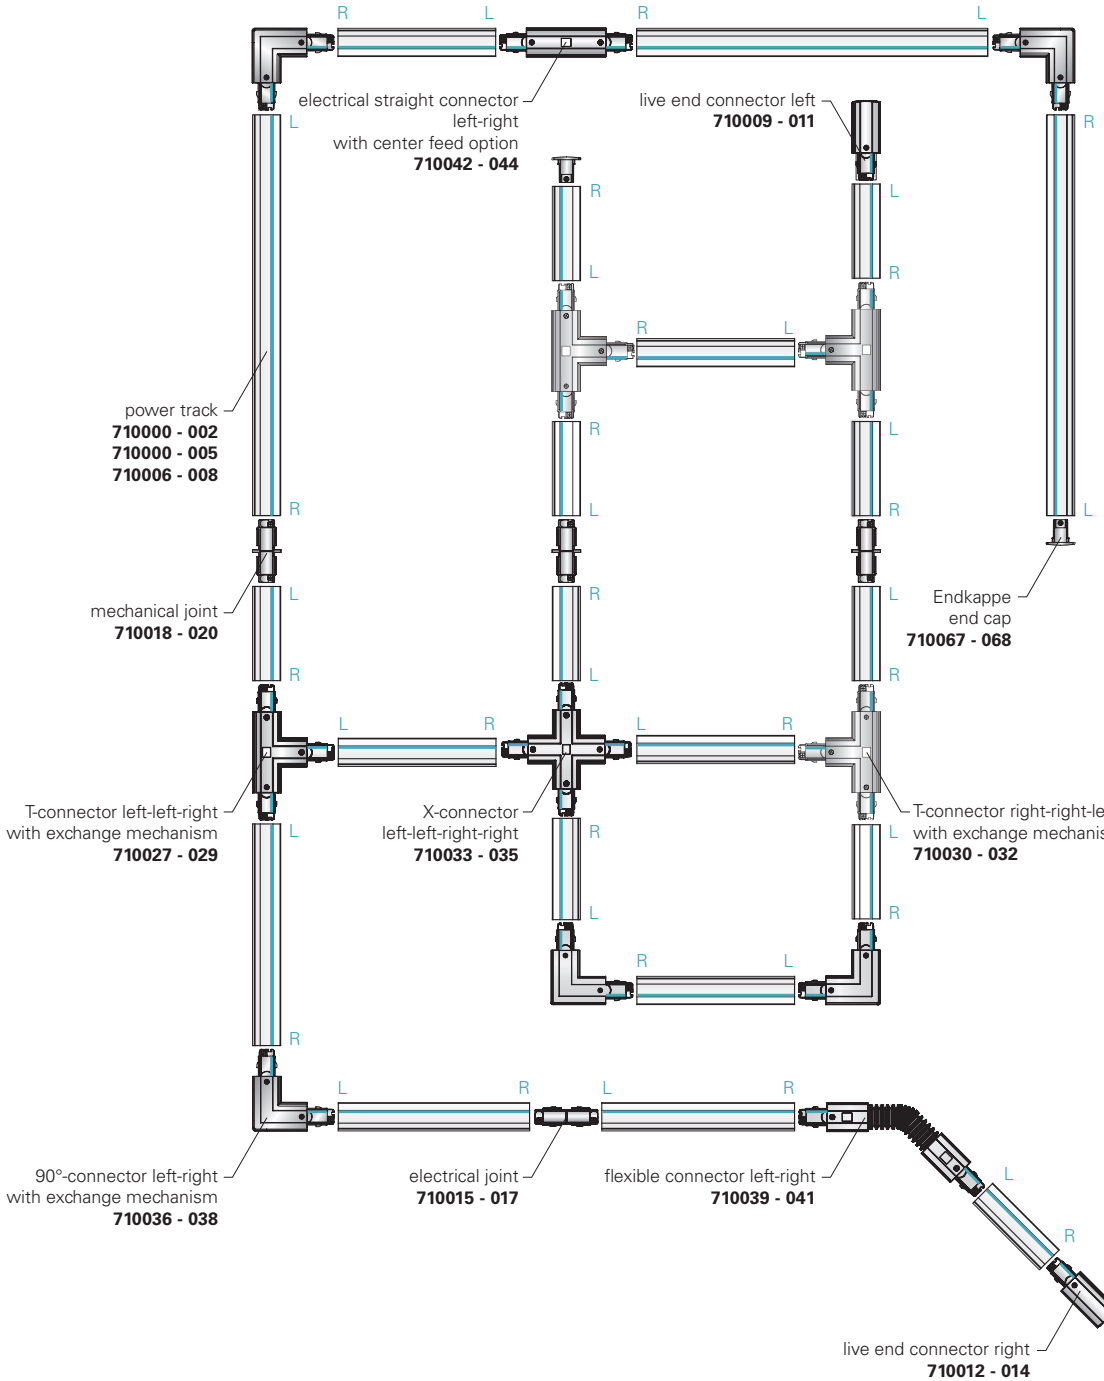



D LINE POWER RAIL SYSTEM 3-PHASE 230V

The new D LINE track system is available exclusively from DEKO-LIGHT and is extremely easy to plan and install thanks to its components, some of which have been completely redesigned. It is also compatible with all common track adapters and luminaires. The elegant and timeless design is available in white, black and grey, and the wide range of accessories and mounting components means that there are no limits to its use and installation. Thanks to the new interchangeable mechanism of the 90° and T connectors, planning is easier than ever before and the installation of even complex shapes will be child's play in the future.

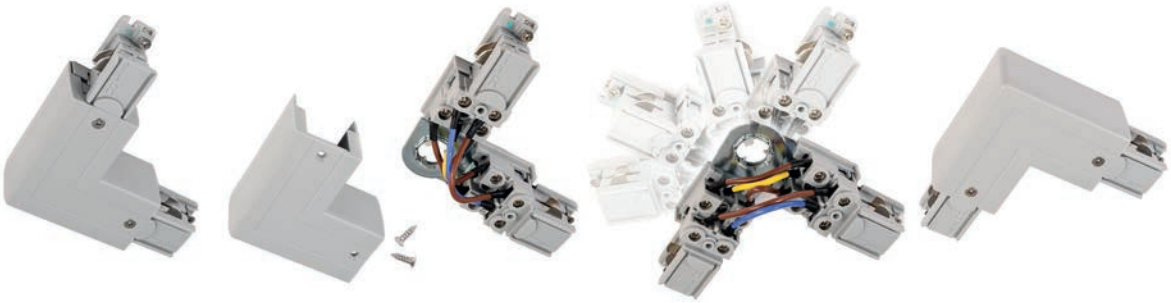

COMPATIBILITY OVERVIEW

power rail	luminaires and power rail adapters from:						
D LINE	D LINE	Global	Ivela	Erco	Hoffmeister	Zumtobel/ Staff	Eutrac
	compatible	compatible	compatible	compatible	compatible	compatible	compatible

luminaires	3-phase power rail from:						
DEKO-LIGHT	D LINE	Global	Ivela	Erco	Hoffmeister	Zumtobel/ Staff	Eutrac
	compatible	compatible*	compatible*	compatible*	compatible*	compatible*	compatible*

*compatible with all DEKO-LIGHT 3-phase spotlights, except ALNITAK series [S. 323] and 3-phase adapter with integrated multi-CC power supply [S. 315].

All data without guarantee. Technical data and dimensions are subject to change without prior notice. Check against samples when planning a project to ensure functionality.





D LINE MOUNTING POWER RAIL

- aluminium
- 3-phase

item	colour	dimensions W x H x L	price
710000	white	35,2 x 35,2 x 1000 mm	**44,95 €**
710003	white	35,2 x 35,2 x 2000 mm	**89,95 €**
710006	white	35,2 x 35,2 x 3000 mm	**129,95 €**
710001	grey	35,2 x 35,2 x 1000 mm	**44,95 €**
710004	grey	35,2 x 35,2 x 2000 mm	**89,95 €**
710007	grey	35,2 x 35,2 x 3000 mm	**129,95 €**
710002	black	35,2 x 35,2 x 1000 mm	**44,95 €**
710005	black	35,2 x 35,2 x 2000 mm	**89,95 €**
710008	black	35,2 x 35,2 x 3000 mm	**129,95 €**

220-240 Volt | 16 A | IP20



D LINE BUILT IN POWER RAIL WITH WINGS

- aluminium
- 3-phase

item	colour	dimensions W x H x L	price
710069	white	56 x 35,5 x1000 mm	**54,95 €**
710070	white	56 x 35,5 x2000 mm	**99,95 €**
710071	white	56 x 35,5 x3000 mm	**144,95 €**

220-240 Volt | 16 A | IP20

On request, all D LINE busbars can be supplied ready-made and cut to size according to your specifications for a small surcharge. This allows you to start installation directly on site at the customer's premises. Please contact our sales department for more information.



With the surface-mounted adapter, every 3-phase track luminaire can be converted into a surface-mounted spotlight. This is often desired when ceiling spots scattered around the room are to match the design of the track spotlights.







D LINE MOUNTING ADAPTER FOR LIGHTS

- plastic
- luminaire not included

item	colour	dimensions W x Ø	price
710045	white	35 x 110 mm	**29,95 €**
710046	grey	35 x 110 mm	**29,95 €**
710047	black	35 x 110 mm	**29,95 €**

220-240 Volt | 16 A | IP20





D LINE LIVE END FEEDER LEFT

- plastic
- suitable for mounting and built-in system
- up to 3-phases can be fed in

item	colour	dimensions L x W x H	price
710009	white	98,5 x 35,2 x 35,5 mm	**15,95 €**
710010	grey	98,5 x 35,2 x 35,5 mm	**15,95 €**
710011	black	98,5 x 35,2 x 35,5 mm	**15,95 €**

220-240 Volt | 16 A | IP20



accessories for built in system

710089 cover plate built in track feeder left/right **3,95 €**





D LINE LIVE END FEEDER RIGHT

- plastic
- suitable for mounting and built-in system
- up to 3-phases can be fed in

item	colour	dimensions L x W x H	price
710012	white	98,5 x 35,2 x 35,5 mm	**15,95 €**
710013	grey	98,5 x 35,2 x 35,5 mm	**15,95 €**
710014	black	98,5 x 35,2 x 35,5 mm	**15,95 €**

220-240 Volt | 16 A | IP20



accessories for built in system

710089 cover plate built in track feeder left/right **3,95 €**



D LINE ELECTRICAL STRAIGHT CONNECTOR WITH CENTER FEED OPTION

- plastic
- suitable for mounting and built-in system
- up to 3-phases can be fed in

item	colour		dimensions L x W x H	price
710042	☐	white	166 x 35 x 35,5 mm	**32,95 €**
710043	■	grey	166 x 35 x 35,5 mm	**32,95 €**
710044	■	black	166 x 35 x 35,5 mm	**32,95 €**

220-240 Volt | 16 A | IP20 | ⏚



accessories for built in system

710090	cover plate built in track straight connector	**3,95 €**



D LINE FLEXIBLE-CONNECTOR LEFT-RIGHT

- plastic
- suitable for mounting system

item	colour		dimensions L x W x H	price
710039	☐	white	248 x 35 x 35,5 mm	**42,95 €**
710040	■	grey	248 x 35 x 35,5 mm	**42,95 €**
710041	■	black	248 x 35 x 35,5 mm	**42,95 €**

220-240 Volt | 16 A | IP20 | ⏚





D LINE ELECTRICAL JOINT

- plastic
- suitable for mounting and built-in system

item	colour	dimensions L x W x H	price
710015	white	68 x 20,5 x 26,5 mm	**9,95 €**
710016	grey	68 x 20,5 x 26,5 mm	**9,95 €**
710017	black	68 x 20,5 x 26,5 mm	**9,95 €**

220-240 Volt | 16 A | IP20





D LINE MECHANICAL JOINT

- plastic
- suitable for mounting and built-in system

item	colour	dimensions L x W x H	price
710018	white	66,4 x 20 x 27 mm	**6,95 €**
710019	grey	66,4 x 20 x 27 mm	**6,95 €**
710020	black	66,4 x 20 x 27 mm	**6,95 €**

220-240 Volt | 16 A | IP20

If, for example, more complex track installations are to be visually connected to one piece, but several different power supplies/controls are used, the mechanical connector is ideal. Visually, the track appears to be in one piece, electrically the two sections are separated from each other.





D LINE 90°-JOINT LEFT-RIGHT WITH EXCHANGE MECHANISM

- plastic
- suitable for mounting and built-in system


item	colour	dimensions L x W x H	price
710036	white	100,7 x 100,7 x 35,5 mm	**34,95 €**
710037	grey	100,7 x 100,7 x 35,5 mm	**34,95 €**
710038	black	100,7 x 100,7 x 35,5 mm	**34,95 €**

220-240 Volt | 16 A | IP20





accessories for built in system

710091	cover plate built in track 90°-joint	**3,95 €**

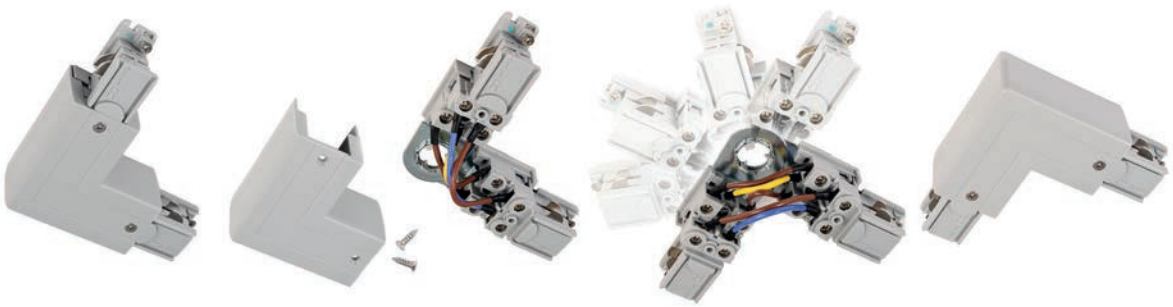

By simply removing the cover of the corner connector, the alignment [left/right] can be reversed. This eliminates the annoying rethinking [N conductor left or right] and makes both planning and installation child's play.


D LINE T-JOINT LEFT-LEFT-RIGHT WITH EXCHANGE MECHANISM

- plastic
- suitable for mounting and built-in system

item	colour		dimensions L x W x H	price
710027	☐	white	166 x 101 x 35,5 mm	**49,95 €**
710028	▒	grey	166 x 101 x 35,5 mm	**49,95 €**
710029	■	black	166 x 101 x 35,5 mm	**49,95 €**



D LINE T-JOINT RIGHT-RIGHT-LEFT WITH EXCHANGE MECHANISM

- plastic
- suitable for mounting and built-in system


item	colour		dimensions L x W x H	price
710030	☐	white	166 x 101 x 35,5 mm	**49,95 €**
710031	▒	grey	166 x 101 x 35,5 mm	**49,95 €**
710032	■	black	166 x 101 x 35,5 mm	**49,95 €**







accessories for built in system

710093	cover plate built in track T-joint	**3,95 €**

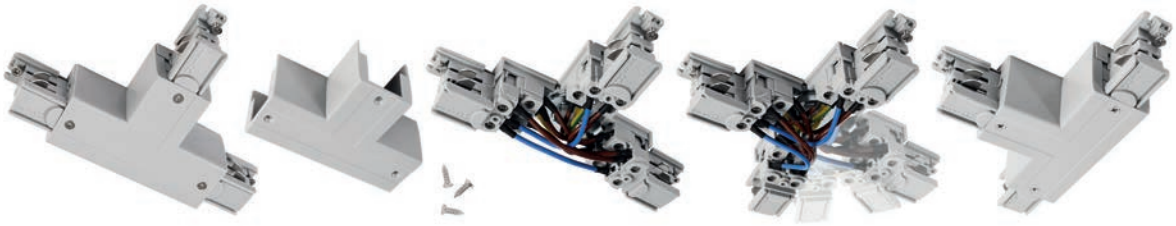

Almost identically to the corner connector, the direction [left/right] of the T-joint can also be changed by removing the cover. Due to the design, however, there are two T-joints in each colour variant, as it may be that either left/left/right or right/right/left is required depending on the alignment.

But also with this article, the variants could be reduced by half. This also means here: significantly simplified planning and assembly.


D LINE X-JOINT
LEFT-LEFT-RIGHT-RIGHT

- plastic
- suitable for mounting and built-in system

item	colour	dimensions L x W x H	price
710033	white	166 x 166 x 35,5 mm	**66,95 €**
710034	grey	166 x 166 x 35,5 mm	**66,95 €**
710035	black	166 x 166 x 35,5 mm	**66,95 €**

220-240 Volt | 16 A | IP20



accessories for built in system

710092	cover plate built in track X-joint	**4,95 €**



With the kind support of WIBU-SYSTEMS AG Karlsruhe





D LINE COVER PLATE BUILT IN TRACK

- plastic
- suitable for mounting and built-in system

item	colour	dimensions L x W x H	price
710077	white	1000 x 21,5 x 7,5 mm	**5,95 €**
710079	black	1000 x 21,5 x 7,5 mm	**5,95 €**

Conductor rails mounted within a possible contact zone or at a height of less than 2.30 m must additionally be closed with a cover panel.







D LINE ENDCAP

- plastic
- suitable for mounting and built-in system

item	colour	dimensions L x W x H	price
710066	white	31,3 x 35,2 x 32,5 mm	**2,95 €**
710067	grey	31,3 x 35,2 x 32,5 mm	**2,95 €**
710068	black	31,3 x 35,2 x 32,5 mm	**2,95 €**





D LINE MOUNTING BRACKET FLEX

- metal
- suitable for mounting system

item	colour	dimensions L x W x H	price
710063	white	40 x 33,8 x 12,5 mm	**5,95 €**
710064	grey	40 x 33,8 x 12,5 mm	**5,95 €**
710065	black	40 x 33,8 x 12,5 mm	**5,95 €**





D LINE SUSPENSION CLAMP FOR TRACK CONNECTION

- metal
- suitable for mounting system
- for chain assembly
  [chain not included]

item	colour	dimensions L x W x H	price
710057	white	181 x 32 x 20 mm	**9,95 €**
710058	grey	181 x 32 x 20 mm	**9,95 €**
710059	black	181 x 32 x 20 mm	**9,95 €**





D LINE CEILING SUSPENSION RIGID



- metal
- stable and shapely suspension
- suspension dimension 635 mm [can be shortened to 335 mm]
- suspension dimension can be extended by means of accessories
- suitable for mounting system

item	colour	dimensions L x W	price
710078	white	635 x 60 mm	**32,95 €**
710085	grey	635 x 60 mm	**32,95 €**
710084	black	635 x 60 mm	**32,95 €**



EXTENSION FOR CEILING SUSPENSION

- metal
- increases the suspension dimension by 300 mm each
- suitable for rigid ceiling suspension

item	colour	dimensions L x W	price
710086	white	300 x 10 mm	**5,95 €**
710088	grey	300 x 10 mm	**5,95 €**
710087	black	300 x 10 mm	**5,95 €**






D LINE WIRE SUSPENSION BRACKET

- metal / plastic
- rope length: 1500 mm
- suspension dimension can be individually shortened: 120-1500 mm
- suitable for mounting system

item	colour	dimensions L x W x H	price
710048	white	120 x 31 x 52 mm	**14,95 €**
710049	grey	120 x 31 x 52 mm	**14,95 €**
710050	black	120 x 31 x 52 mm	**14,95 €**

accessories

710081 rope | L: 4000 mm **7,95 €**








D LINE ROPE SUSPENSION BRACKET MINI



- metal
- beautifully shaped and filigree suspension
- rope length: 5000 mm
- suspension dimension can be individually shortened: 90 - 4980 mm
- suitable for mounting system

item	colour	dimensions L x W x H	price
710094	white	120 x 31 x 58 mm	**19,95 €**
710095	grey	120 x 31 x 58 mm	**19,95 €**
710096	black	120 x 31 x 58 mm	**19,95 €**





D LINE QUICK MOUNTING CLAMP FOR TRADE FAIR CONSTRUCTION

- aluminium
- suitable for mounting system

item	colour	dimensions L x W x H	price
710082	black	40 x 30 x 11,9 mm	**10,95 €**

Especially in trade fair construction, where busbars are frequently mounted and dismounted, the quick mounting clamp is the perfect mounting aid. The conductor rail is clicked into place with the spring clip and fixed in place without tools by means of a knurled screw. Conductor rail installation has never been faster.



D LINE TRUSS ADAPTER

- aluminium
- suitable for mounting system

item	colour	dimensions L x W x H	price
710083	silver coloured	40 x 30 x 11,9 mm	**29,95 €**

Thanks to the quick-release fasteners of the truss adapter, the D LINE busbars can be mounted in seconds on the trusses with 50 mm tube diameters commonly used in event technology and exhibition stand construction.



This little »jack-of-all-trades« makes mounting a track on an existing grid ceiling child's play. The installation time is only a fraction of what it used to be. In the first step, the clip is simply clicked into the visible metal strips of the grid ceiling and is held bomb-proof on the ceiling by means of a safety spring clip. After that, the conductor rail is simply pushed onto it and the installation is finished.











D LINE QUICK MOUNTING BRACKET FOR GRID CEILINGS

- metal
- suitable for mounting system

item	colour	dimensions L x W x H	price
710051	white	120 x 31 x 11 mm	**11,95 €**
710052	grey	120 x 31 x 11 mm	**11,95 €**
710053	black	120 x 31 x 11 mm	**11,95 €**












D LINE 3-PHASE-ADAPTER FOR LUMINAIRE MOUNTING

- plastic / metal
- max. 10 kg/100N
- suitable for mounting and built-in system
- delivery includes trumpet nipple and M10 flat nut and strain relief grommet
- luminaire not included



item	colour		dimensions L x W x H	price
710097		white	84 x 32 x 54 mm	**18,95 €**
710098		grey	84 x 32 x 54 mm	**18,95 €**
710099		black	84 x 32 x 54 mm	**18,95 €**

220-250 Volt | 10 A | IP20

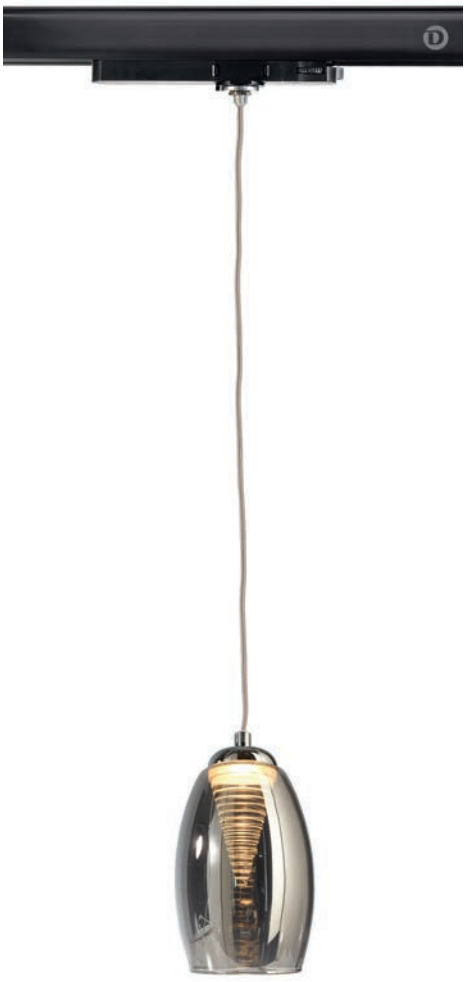

D LINE 3-PHASE-ADAPTER WITH MULTI CC POWER SUPPLY





- plastic / metal
- max. 10 kg/100N
- suitable for mounting and built-in system
- delivery includes trumpet nipple and M10 flat nut
- luminaire not included
- integrated, adjustable, current-stable power supply [CC]
- exclusively for 3-phase power rail from D LINE, Ivela and Hoffmeister
- iit is essential to check suitability of the intended luminaire

item	colour		dimensions L x W x H				price
862180	☐	white	162 x 31 x 41 mm	250/350/450/500 mA	6,30 - 21,00 W	25-42V	**32,95 €**
862181	☐	white	162 x 31 x 41 mm	600/700/750/800 mA	15,00 - 33,60 W	25-42V	**35,95 €**
862182	☐	white	162 x 31 x 41 mm	850/900/950/1050 mA	23,00 - 44,10 W	27-42V	**37,95 €**
862183	■	black	162 x 31 x 41 mm	250/350/450/500 mA	6,30 - 21,00 W	25-42V	**32,95 €**
862184	■	black	162 x 31 x 41 mm	600/700/750/800 mA	15,00 - 33,60 W	25-42V	**35,95 €**
862185	■	black	162 x 31 x 41 mm	850/900/950/1050 mA	23,00 - 44,10 W	27-42V	**37,95 €**








D LINE ELECTRICAL OUTLET ADAPTER

- plastic
- integrated fuse
- suitable for mounting and built-in system

item	colour		dimensions L x W x H	price
710024	☐	white	58,5 x 53,5 x 103 mm	**28,95 €**
710026	■	black	58,5 x 53,5 x 103 mm	**28,95 €**









D LINE MOUNTING ADAPTER FOR ADDITIONAL COMPONENTS

- plastic / metal
- max. load 10 kg/100N
- suitable for mounting and built-in system

item	colour		dimensions L x W x H	price
710054	☐	white	66,5 x 31,5 x 84 mm	**10,95 €**
710055	▒	grey	66,5 x 31,5 x 84 mm	**10,95 €**
710056	■	black	66,5 x 31,5 x 84 mm	**10,95 €**



With our socket adapter, additional devices, lights etc. can be supplied with power in the simplest way. In combination with the »Mounting adapter for additional components« [710054/55/56], additional headlights or other devices [up to 10kg] can be attached and supplied with power.



D LINE SIGNS HOOK

- plastic / metal
- max. load 5 kg/50N
- suitable for mounting and built-in system

item	colour	dimensions H x Ø	price
710060	white	52 x 25 mm	**2,95 €**
710061	grey	52 x 25 mm	**2,95 €**
710062	black	52 x 25 mm	**2,95 €**



page 321



page 321



page 322



page 323



page 324



page 325



page 326



page 327



page 328



page 329



page 330



page 331



from page 332



page 334



page 335




page 336




page 337

power luminaires

COMPATIBILITY OVERVIEW

power rail	luminaires and power rail adapters from:						
D LINE	D LINE	Global	Ivela	Erco	Hoffmeister	Zumtobel/ Staff	Eutrac
	compatible	compatible	compatible	compatible	compatible	compatible	compatible

luminaires	3-phase power rail from:						
DEKO-LIGHT	D LINE	Global	Ivela	Erco	Hoffmeister	Zumtobel/ Staff	Eutrac
	compatible	compatible*	compatible*	compatible*	compatible*	compatible*	compatible*

*compatible with all DEKO-LIGHT 3-phase spotlights, except ALNITAK series [S. 323] and 3-phase adapter with integrated multi-CC power supply [S. 315].

All data without guarantee. Technical data and dimensions are subject to change without prior notice. Check against samples when planning a project to ensure functionality.



With the kind support of SH-Lichttechnik / Becks Reutlingen






PANEL TRACK LIGHT

- aluminium
- dimensions L x W x H: 300 x 110 x 8,5 mm

item	colour		colour temperature		light current	price
707134	☐	white	WW	3000 K	2000 lm	**109,95 €**
707136	☐	white	NW	4000 K	2200 lm	**109,95 €**
707135	■	black	WW	3000 K	2000 lm	**109,95 €**
707137	■	black	NW	4000 K	2200 lm	**109,95 €**








suitable floodlights from page 510 **732147-732155**


FLOOD SMD 15 + 30

- aluminium diecast, glass

item	colour		colour temperature		light current	dimensions L x W x H	socket L x W	power	light source	price
707130	☐	white	WW	3000 K	1575 lm	192 x 180 x 38 mm	179 x 20 mm	15 W	36 LED	**109,95 €**
707138	☐	white	NW	4000 K	1650 lm	192 x 180 x 38 mm	179 x 20 mm	15 W	36 LED	**99,95 €**
707139	☐	white	WW	3000 K	3150 lm	261 x 236 x 41 mm	237 x 25 mm	30 W	72 LED	**139,95 €**
707140	☐	white	NW	4000 K	3300 lm	261 x 236 x 41 mm	237 x 25 mm	30 W	72 LED	**139,95 €**






DRACONIS

- light colour and output adjustable via dip switch
- high luminous intensity [bis 8200 lm]
- aluminium diecast
- dimensions L x W x H: 578 x 189 x 129 mm
- socket L x W x H: 102 x 88 x 25 mm

item	colour	colour temperature	light current	price
620120	white	WW NW 2700 / 3500 / 4000 K	8215 lm	**379,95 €**
620119	aluminium	WW NW 2700 / 3500 / 4000 K	8215 lm	**379,95 €**

220-240 50Hz Volt | 45/55/ 72W | SMD | 198 LED | Ra>80 | 60°




suitable ceiling lights page 83
348128
348099




accessories


930577	15° lens asymmetric | 6 lenses installed per luminaire	**9,95 €**
930544	20° lens symmetrisch | 6 lenses installed per luminaire	**9,95 €**
930545	30° lens symmetrisch | 6 lenses installed per luminaire	**9,95 €**
930546	90° lens symmetrisch | 6 lenses installed per luminaire	**9,95 €**



light distribution curve 620119 - 45 W



light distribution curve 620119 - 55 W



light distribution curve 620119 - 72 W








ALNITAK 25-34W

- aluminium
- dimensions L x W x H: 336 x 36 x 49 mm
- power: 25-34 W adjustable via dip switch
- UGR <16
- exclusively for 3-phase power rails from D LINE, Ivela and Hoffmeister

item	colour		colour temperature		light current	price
707110		white	WW	3000 K	3114 lm	**181,95 €**
707111		white	NW	4000 K	3068 lm	**181,95 €**
707112		silver coloured	WW	3000 K	3114 lm	**181,95 €**
707113		silver coloured	NW	4000 K	3068 lm	**181,95 €**
707114		black	WW	3000 K	3114 lm	**181,95 €**
707115		black	NW	4000 K	3068 lm	**181,95 €**



accessories

930386	reflector 12° | silver coloured	**2,15 €**
930387	reflector 48° | silver coloured	**2,15 €**
930388	Anti Glare | white	**2,99 €**




LINEAR 60 + 100


· aluminium

item	colour		colour temperature		light current	dimensions L x W x H	power	price
707046	☐	white	WW	3000 K	1655 lm	687 x 33 x 52 mm	19 W	**134,95 €**
707015	☐	white	NW	4000 K	1655 lm	687 x 33 x 52 mm	19 W	**134,95 €**
707048	☐	silver coloured	WW	3000 K	1655 lm	687 x 33 x 52 mm	19 W	**134,95 €**
707045	☐	silver coloured	NW	4000 K	1655 lm	687 x 33 x 52 mm	19 W	**134,95 €**
707047	■	black	WW	3000 K	1655 lm	687 x 33 x 52 mm	19 W	**134,95 €**
707034	■	black	NW	4000 K	1655 lm	687 x 33 x 52 mm	19 W	**134,95 €**
707087	☐	white	WW	3000 K	2900 lm	1087 x 33 x 52 mm	30 W	**179,95 €**
707084	☐	white	NW	4000 K	2900 lm	1087 x 33 x 52 mm	30 W	**179,95 €**
707089	☐	silver coloured	WW	3000 K	2435 lm	1087 x 33 x 52 mm	30 W	**179,95 €**
707086	☐	silver coloured	NW	4000 K	2435 lm	1087 x 33 x 52 mm	30 W	**179,95 €**
707088	■	black	WW	3000 K	2900 lm	1087 x 33 x 52 mm	30 W	**179,95 €**
707085	■	black	NW	4000 K	2900 lm	1087 x 33 x 52 mm	30 W	**179,95 €**





light distribution curve LINEAR 60



light distribution curve LINEAR 100







CAN

- aluminium diecast
- dimensions L x Ø: 134 x 60 mm

item	colour	price
707079	white	**49,95 €**
707080	silver coloured	**49,95 €**
707081	black	**49,95 €**



accessories

930301	reflector ring | H: 28 mm | white	**4,95 €**
930302	reflector ring | H: 28 mm | black	**4,95 €**
930303	reflector ring | H: 28 mm | gold optics mat	**4,95 €**
930366	reflector ring | H: 28 mm | silver coloured	**4,95 €**

suitable illuminants on page 767-768

HORUS

If you are looking for a slim, powerful and flexibly usable 3-phase spotlight, you will not get past the Horus. The slim housing and the matt finish of the surface, combined with the powerful chip through all wattages, makes the Horus a true all-rounder in its field.






HORUS

- plastic
- UGR <19

item	colour		colour temperature		light current	dimensions L x Ø	power	light source	price
707095	☐	white	WW	3000 K	625 lm	125 x 60 mm	7 W	6 LED	**75,95 €**
707097	☐	white	NW	4000 K	635 lm	125 x 60 mm	7 W	6 LED	**75,95 €**
707094	■	black	WW	3000 K	625 lm	125 x 60 mm	7 W	6 LED	**75,95 €**
707096	■	black	NW	4000 K	635 lm	125 x 60 mm	7 W	6 LED	**75,95 €**
707099	☐	white	WW	3000 K	915 lm	140 x 70 mm	10 W	12 LED	**85,95 €**
707101	☐	white	NW	4000 K	1030 lm	140 x 70 mm	10 W	12 LED	**85,95 €**
707098	■	black	WW	3000 K	915 lm	140 x 70 mm	10 W	12 LED	**85,95 €**
707100	■	black	NW	4000 K	1030 lm	140 x 70 mm	10 W	12 LED	**85,95 €**
707103	☐	white	WW	3000 K	1705 lm	185 x 80 mm	20 W	14 LED	**95,95 €**
707105	☐	white	NW	4000 K	1785 lm	185 x 80 mm	20 W	14 LED	**95,95 €**
707102	■	black	WW	3000 K	1705 lm	185 x 80 mm	20 W	14 LED	**95,95 €**
707104	■	black	NW	4000 K	1785 lm	185 x 80 mm	20 W	14 LED	**95,95 €**
707107	☐	white	WW	3000 K	2525 lm	210 x 90 mm	30 W	21 LED	**115,95 €**
707109	☐	white	NW	4000 K	2605 lm	210 x 90 mm	30 W	21 LED	**115,95 €**
707106	■	black	WW	3000 K	2525 lm	210 x 90 mm	30 W	21 LED	**115,95 €**
707108	■	black	NW	4000 K	2605 lm	210 x 90 mm	30 W	21 LED	**115,95 €**



AARON

Hardly any other area of application places such high demands on flexible illumination as retail. With the 3-phase spotlights of the AARON series, DEKO-LIGHT has a solution in its portfolio that is especially aimed at shops with high ceilings. With its 7400 lm and a beam angle of 40°, the 230V power rails spot perfectly sets the scene for shops, exhibitions and trade fair areas.






AARON

- aluminium
- dimensions L x W x Ø: 255 x 182 x 120 mm

item	colour		colour temperature		light current	price
707092	☐	white	WW	3000 K	7400 lm	**529,95 €**
707093	☐	white	NW	4000 K	7400 lm	**529,95 €**
707090	■	black	WW	3000 K	7400 lm	**529,95 €**
707091	■	black	NW	4000 K	7400 lm	**529,95 €**





light distribution curve









NIHAL MINI

- aluminium diecast
- dimensions L x W x H x Ø: 94 x 102 x 139 x 60 mm
- dimmable via phase control or phase cut-off

item	colour		colour temperature		light current	price
707036		white	WW	3000 K	950 lm	**164,95 €**
707038		white	NW	4000 K	1180 lm	**164,95 €**
707054		silver coloured	WW	3000 K	950 lm	**164,95 €**
707055		silver coloured	NW	4000 K	1180 lm	**164,95 €**
707037		black	WW	3000 K	950 lm	**164,95 €**
707039		black	NW	4000 K	1180 lm	**164,95 €**





light distribution curve



accessories

930301	reflector ring white	**4,95 €**
930302	reflector ring black	**4,95 €**
930303	reflector ring gold	**4,95 €**
930366	reflector ring silver	**4,95 €**
930297	side cover white	**3,95 €**
930298	side cover black	**3,95 €**
930299	side cover gold	**3,95 €**
930300	side cover wooden look	**5,95 €**
930364	side cover silver	**3,95 €**
930306	reflector 50°	**10,95 €**
930307	honeycomb filter	**10,95 €**
930308	spread lens 40° | clear/satined	**10,95 €**
930309	softening lens 47° | satined	**10,95 €**
930310	linear spread lens 40°/80° asymmetric | clear/satined	**10,95 €**









NIHAL

- aluminium diecast
- dimensions L x W x H x Ø: 135 x 138 x 188 x 86 mm
- dimmable via phase control or phase cut-off

item	colour		colour temperature		light current	price
707040		white	WW	3000 K	2450 lm	**209,95 €**
707042		white	NW	4000 K	2860 lm	**209,95 €**
707056		silver coloured	WW	3000 K	2470 lm	**209,95 €**
707057		silver coloured	NW	4000 K	2860 lm	**209,95 €**
707041		black	WW	3000 K	2450 lm	**209,95 €**
707043		black	NW	4000 K	2860 lm	**209,95 €**





light distribution curve



accessories

930315	reflector ring white	**4,95 €**
930316	reflector ring black	**4,95 €**
930317	reflector ring gold	**4,95 €**
930365	reflector ring silver	**4,95 €**
930311	side cover white	**5,95 €**
930312	side cover black	**5,95 €**
930313	side cover gold	**5,95 €**
930314	side cover wooden look	**7,95 €**
930363	side cover silver	**5,55 €**
930318	reflector 15°	**17,95 €**
930320	reflector 50°	**17,95 €**
930321	honeycomb filter	**10,95 €**
930322	spread lens 40° | clear/satined	**10,95 €**
930323	softening lens 47° | satined	**10,95 €**
930324	linear spread lens 40°/80° asymmetric | clear/satined	**10,95 €**

PLEIONE FOCUS

Power rails convince in shops, showrooms, offices and more with their unrivalled flexibility. The PLEIONE FOCUS I and II track-mounted spotlights crown this flexibility by enabling the beam angle to be continuously adjusted in the range from 25° to 60°. At the same time, the lens can be focused to highlight objects and surfaces precisely and with high colour fidelity.






PLEIONE FOCUS I


- aluminium diecast
- dimensions L x H x Ø: 181 x 180 x 68 mm
- fokussierbare lens
- light cone infinitely adjustable [25°-60°]

item	colour	colour temperature	light current	price
707069	white	WW 3000 K	1100 lm	**209,95 €**
707070	white	NW 4000 K	1150 lm	**209,95 €**





light distribution curve 707069



light distribution curve 707070



Mit freundlicher Unterstützung von Küchen Leicht Ettlingen / Projekt: Leicht Küchenstudio Ettlingen / Planung / Umsetzung: CS Elektroanlagen Ettlingen







PLEIONE FOCUS II


- aluminium diecast
- dimensions L x H x Ø: 195 x 160 x 90 mm
- fokussierbare lens
- light cone infinitely adjustable [25°-60°]

item	colour		colour temperature		light current	price
707067	☐	white	WW	3000 K	3050 lm	**299,95 €**
707068	☐	white	NW	4000 K	3300 lm	**299,95 €**





light distribution curve 707067



light distribution curve 707068










suitable
pendant lights
page 13
342177
342178

LUCEA 10

- aluminium diecast
- dimensions H x Ø: 249 x 65 mm
- dimmable via phase control or phase cut-off
- light color adjustable via DIP switch

item	colour	colour temperature	light current	price
707116	white	WW NW 3000 / 4000 K	930 / 1000 lm	**139,95 €**
707117	black	WW NW 3000 / 4000 K	930 / 1000 lm	**139,95 €**





suitable
ceiling surface-mounted lamps
from page 84
348153
348154
348161
348162

accessories

930679 lens 24° **9,95 €**








LUCEA 15 + 20

- aluminium diecast
- dimensions H x Ø: 269 x 85 mm
- dimmable via phase control or phase cut-off
- light color adjustable via DIP switch

item	colour		colour temperature	light current	power	price
707118	☐	white	WW NW 3000 / 4000 K	1460 / 1500 lm	15 W	**159,95 €**
707119	■	black	WW NW 3000 / 4000 K	1460 / 1500 lm	15 W	**159,95 €**
707120	☐	white	WW NW 3000 / 4000 K	1930 / 2000 lm	20 W	**179,95 €**
707121	■	black	WW NW 3000 / 4000 K	1930 / 2000 lm	20 W	**179,95 €**



accessories

930680	lens 24°	**12,95 €**
930681	lens 60°	**12,95 €**





suitable pendant lights page 13
342179-342182



suitable ceiling surface-mounted lamps from page 84
348155-348158
348163-348166






LUCEA 30

- aluminium diecast
- dimensions H x Ø: 302 x 100 mm
- dimmable via phase control or phase cut-off
- light color adjustable via DIP switch

item	colour		colour temperature	light current	price
707122	☐	white	WW NW 3000 / 4000 K	2700 / 2900 lm	**199,95 €**
707123	■	black	WW NW 3000 / 4000 K	2700 / 2900 lm	**199,95 €**



accessories

930682	lens 24°	**15,95 €**
930684	lens 60°	**15,95 €**
930677	barn door white	**24,95 €**
930678	barn door black	**24,95 €**





suitable ceiling surface-mounted lamps from page 84
348159
348160
348167
348168







suitable
pendant lights
page 13
342177
342178

LUCEA 10

- aluminium diecast
- dimensions H x Ø: 157 x 65 mm
- max. suspension: 1800 mm
- dimmable via phase control or phase cut-off
- light color adjustable via DIP switch



suitable
ceiling surface-
mounted lamps
from page 84
348153
348154
348161
348162

item	colour		colour temperature	light current	price
707124	☐	white	WW NW 3000 / 4000 K	930 / 1000 lm	**149,95 €**
707125	■	black	WW NW 3000 / 4000 K	930 / 1000 lm	**149,95 €**

220-240 Volt | 10 W | 1 LED | Ra>90 | 36° | + −

accessories

930679	lens 24°	**9,95 €**









suitable
pendant lights
page 13
342179
342180
342181
342182

LUCEA 15 + 20

- aluminium diecast
- dimensions H x Ø: 178 x 85 mm
- max. suspension: 1800 mm
- dimmable via phase control or phase cut-off
- light color adjustable via DIP switch



suitable
ceiling surface-
mounted lamps
from page 84
348155-348158
348163-348166

item	colour		colour temperature	light current	power	price
707126	☐	white	WW NW 3000 / 4000 K	1460 / 1500 lm	15 W	**169,95 €**
707127	■	black	WW NW 3000 / 4000 K	1460 / 1500 lm	15 W	**169,95 €**
707128	☐	white	WW NW 3000 / 4000 K	1930 / 2000 lm	20 W	**189,95 €**
707129	■	black	WW NW 3000 / 4000 K	1930 / 2000 lm	20 W	**189,95 €**

220-240 Volt | 1 LED | Ra>90 | 36° | + −

accessories

930680	lens 24°	**12,95 €**
930681	lens 60°	**12,95 €**











SLIM

- aluminium diecast
- dimensions H x Ø: 300 x 39 mm
- max. suspension: 1800 mm
- textile cable
- UGR <19

item	colour		colour temperature		light current	price
707133	☐	white	ww	3000 K	500 lm	**89,95 €**
707132	■	black	ww	3000 K	500 lm	**89,95 €**

220-240 Volt | 5 W | 1 LED | Ra>90 | 24°



suitable pendant lights page 14
342214
342213





UNI II

- aluminium diecast
- dimensions L x Ø: 167 x 100 mm
- dimmable via phase control or phase cut-off

item	colour		colour temperature		light current	price
707044	☐	white	ww	3000 K	910 lm	**179,95 €**
707131	■	black	ww	3000 K	910 lm	**179,95 €**





suitable ceiling surface-mounted lamps from page 76
348124
348176
348125
348175
348107
348210



accessories

930339	reflector ring black	**11,95 €**
930340	reflector ring gold	**11,95 €**
930341	reflector ring chrom	**11,95 €**
930371	reflector ring II black glossy	**10,95 €**
930335	cover backside black	**3,55 €**
930337	cover heatsink black	**3,55 €**
930306	reflector 50°	**10,95 €**
930307	honeycomb filter	**10,95 €**
930308	spread lens 40° | clear/satined	**10,95 €**
930309	softening lens 47° | satined	**10,95 €**
930310	linear spread lens 40°/80° asymmetric | clear/satined	**10,95 €**







STUDIO PAR 30


- aluminium
- dimensions L x H: 271 x 159 mm
- integrated splinter protection grid
- incl. adapter

item	colour	price
707083	silver coloured	**69,95 €**
707082	black	**69,95 €**



accessories

001623	barn door | silver coloured	**29,95 €**
001621	barn door | black	**29,95 €**



suitable illuminants on page 770- 771



BATTERY AND SOLAR LIGHTS

342 battery lights
354 solar lights



page 344



page 344



page 345



page 345



page 346



page 348



page 351



page 351



page 352



page 355



page 355



page 357



page 357



page 358

battery and solar lights

MIRAM

Combine & shine – with the MIRAM series, there are no more limits to your creativity. Simply combine the luminaire head in your favourite colour with a stand, a wall bracket or a pendant fixture of your choice. In this way, you can create your very own individual luminaire in the twinkling of an eye and recombine it at any time without tools. Flexible, simple, chic - that is MIRAM combine & shine.

it's that simple:

- choose a luminaire head in your favourite colour
- select the desired fastening in your favourite colour

your advantages::

- USB-C cable included
- 147 possible combinations





346025 **346033** **346032** **346034** **346035** **346036** **346037**



930625 **930627** **930626** **930628** **930629** **930630** **930631**



930618 **930620** **930619** **930621** **930622** **930623** **930624**



930611 **930613** **930612** **930614** **930615** **930616** **930617**









HEAD MAGNETIC LIGHT MIRAM

- high battery life [>10h]
- easy charging via charging station with USB cable [incl.]
- >190lm
- infinitely dimmable via touch sensor
- can be combined with all brackets of the series thanks to magnetic attachment
- aluminium diecast
- dimensions H x Ø: 30 x 120 mm

item	colour	colour temperature	light current	price
346025	white	ww 3000 K	196 lm	**115,95 €**
346033	grey	ww 3000 K	196 lm	**115,95 €**
346032	black	ww 3000 K	196 lm	**115,95 €**
346034	red	ww 3000 K	196 lm	**115,95 €**
346035	yellow	ww 3000 K	196 lm	**115,95 €**
346036	blue	ww 3000 K	196 lm	**115,95 €**
346037	green	ww 3000 K	196 lm	**115,95 €**





STAND FOR MAGNETIC LIGHT MIRAM

- can be combined as desired with any luminaire head from the MIRAM series
- aluminium diecast
- dimensions H x Ø: 270 x 102 mm

item	colour	price
930611	white	**35,95 €**
930613	grey	**35,95 €**
930612	black	**35,95 €**
930614	red	**35,95 €**
930615	yellow	**35,95 €**
930616	blue	**35,95 €**
930617	green	**35,95 €**



WALL BRACKET FOR MAGNETIC LIGHT MIRAM

- can be combined as desired with any luminaire head from the MIRAM series
- aluminium diecast
- dimensions W x H: 85 x 96 mm
- socket Ø: 60 mm

item	colour	price
930618	white	**19,95 €**
930620	grey	**19,95 €**
930619	black	**19,95 €**
930621	red	**19,95 €**
930622	yellow	**19,95 €**
930623	blue	**19,95 €**
930624	green	**19,95 €**



PENDANT FOR MAGNETIC LIGH MIRAM


- can be combined as desired with any luminaire head from the MIRAM series
- mounting without drilling and screwing
- aluminium diecast
- dimensions W x H: 205 x 185 mm
- max. suspension: 2190 mm

item	colour	price
930625	white	**34,95 €**
930627	grey	**34,95 €**
930626	black	**34,95 €**
930628	red	**34,95 €**
930629	yellow	**34,95 €**
930630	blue	**34,95 €**
930631	green	**34,95 €**

CRUCIS

Powerful performance with a straightforward design: that is our CRUCIS rechargeable luminaire. Whether for a cosy get-together in the garden or as a discreet source of light in a restaurant or beer garden.
With its simple, timeless look, its long battery life and the charging base included in the scope of delivery, nothing stands in the way of a convivial evening outdoors – let alone an impractical cable.



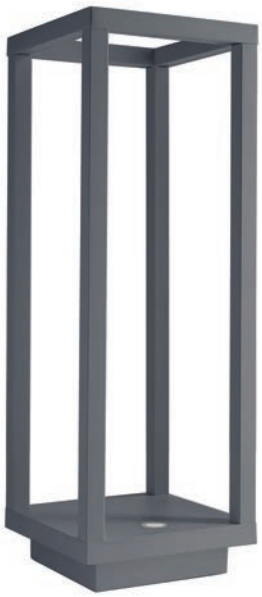



CRUCIS

- high battery life [>10h]
- incl. charging station with USB cable
- >160lm
- infinitely dimmable via touch sensor
- aluminium diecast
- dimensions L x W x H: 100 x 100 x 292 mm
- socket L x W x H: 79 x 79 x 17 mm

item	colour	colour temperature	light current	price
346041	white	WW 3000 K	165 lm	**109,95 €**
346043	grey	WW 3000 K	165 lm	**109,95 €**

2,20 W | SMD | 24 LED | Ra>80 | 30° | IP54



ALGIEBA

The smart table lamp with that certain something! Our battery lamp ALGIEBA not only impresses with its design and robust quality. It also offers that certain something for balmy summer nights outdoors thanks to an inductive charging panel that can be switched on via a touch switch!

No more battery problems or tangled cables. Even while charging your smartphone, the light performance does not suffer in the slightest.

The charging option of the included USB-C charging base completes the sophisticated concept of this unique battery light.











ALGIEBA

- high battery life [>10h] if charging panel is not used
- incl. charging station with USB cable
- >200lm
- infinitely dimmable via touch sensor
- switchable wireless charging panel for smartphones
- aluminium diecast
- dimensions L x W x H: 175 x 92 x 330 mm
- socket L x W x H: 175 x 103 x 15 mm

item	colour	colour temperature	light current	price
346038	white	ww 3000 K	212 lm	**169,95 €**
346040	grey	ww 3000 K	212 lm	**169,95 €**
346039	black	ww 3000 K	212 lm	**169,95 €**

2,20 W | SMD | 24 LED | Ra>80 | 50° | IP54





SHERATAN

The SHERATAN is a battery-operated LED table lamp that can be charged via an integrated USB connection. This makes the SHERATAN suitable not only for use as accent light in living rooms, but also at events such as galas, corporate events and garden parties. The 38 cm high housing with wavy or smooth lampshade and stable base plate made of robust die-cast aluminium [IP54] houses a 2.2 watt LED bulb that produces a pleasant warm white light with 3000 K and can be switched on and off via a touch sensor.



SHERATAN I DIM

- infinitely dimmable via touch sensor
- noble look
- IP54
- aluminium diecast
- dimensions L x W x H x Ø: 100 x 100 x 380 x 110 mm
- socket L x W x H: 100 x 100 x 11 mm
- USB-Micro charging socket
- incl. lithium battery | 2x 2200 mAh

item	colour	colour temperature	light current	price
346011	white	ww 3000 K	154 lm	**129,95 €**
346012	black	ww 3000 K	154 lm	**129,95 €**



accessories


930460 230V USB plug-in power supply incl. micro-USB connection cable **19,95 €**



SHERATAN II DIM

- infinitely dimmable via touch sensor
- noble look
- IP54
- aluminium diecast
- dimensions L x W x H x Ø: 100 x 100 x 380 x 115 mm
- socket L x W x H: 100 x 100 x 11 mm
- USB-Micro charging socket
- incl. lithium battery | 2x 2200 mAh

item	colour	colour temperature	light current	price
346013	white	ww 3000 K	154 lm	**129,95 €**
346014	black	ww 3000 K	154 lm	**129,95 €**



accessories

930460 230V USB plug-in power supply incl. micro-USB connection cable **19,95 €**

LACERTAE USB

Be outside, have fun and simply take the light with you. No problem with this faithful companion. Thanks to its 3-stage dimming function, the LACERTAE USB is a favourite for cosy reading by the lake or a romantic picnic in the park. With the integrated power bank, it not only supports your garden party with light, but also ensures that the music doesn't run out of steam. The LACERTAE USB – a musthave for all those who want to be free.



LACERTAE USB

- portable
- powerbank function with USB-A socket
- three-stage dimmable
- incl. 7800mAh lithium battery
- real glass panes
- aluminium diecast
- dimensions L x W x H: 180 x 180 x 267 mm
- socket L x W x H: 145 x 145 x 25 mm
- USB-Micro charging socket

item	colour	colour temperature	light current	price
346009	dark grey	WW 3000 K	460 lm	**169,95 €**

5 W | SMD | 36 LED | Ra>80 | 120° | IP54



suitable wall light page 400 **731112**

accessories

930460 230V USB plug-in power supply incl. micro-USB connection cable **19,95 €**





SAMAS SOLAR

Not everywhere you want light, there is also electricity. We have the solution. The SAMAS SOLAR series only needs one thing to shine; sunshine every now and then. Thanks to its intelligent economy mode, in which it shines with only 15% light output when not in use, it has a particularly long burning time. As soon as it detects approach via its integrated sensor, it shines with full power. It can also be deactivated via a push-button. The powerful light output combined with the latest technology for long operating times is a real problem solver for walls, tables and gardens.



SAMAS SOLAR

- aluminium diecast
- dimensions L x W x H: 154 x 140 x 290 mm
- socket L x W x H: 110 x 30 x 12 mm
- motion / twilight sensor
- highly efficient solar panel
- incl. Li-Ion battery | 3,70V | 2200 mA

item	colour	colour temperature	light current	price
731122	dark grey	WW 3000 K	130 lm	**129,95 €**

2,20 W | SMD | 25 LED | Ra>80 | 106° | IP54



SAMAS SOLAR

- aluminium diecast
- dimensions L x W: 140 x 140 mm
- socket L x W x H: 100,50 x 100,50 x 22,00 mm
- motion / twilight sensor
- highly efficient solar panel
- incl. Li-Ion battery | 3,70V | 2200 mAh
- incl. ground spike

item	colour	colour temperature	light current	dimensions H	price
733049	dark grey	WW 3000 K	170 lm	340 mm	**119,95 €**
733050	dark grey	WW 3000 K	135 lm	500 mm	**139,95 €**

2,20 W | SMD | 1 LED | Ra>80 | 98° | IP54



SOLAR PREMIUM

The SOLAR PREMIUM series impresses with its futuristic design and functions as an innovative and decorative outdoor luminaire in the outdoor and garden area. The power supply is provided by the integrated rechargeable battery including solar panel, so that no visually disturbing or complicated cables are necessary.

SOLAR PREMIUM I



- aluminium
- dimensions L x W x H: 160,5 x 233,2 x 152 mm
- socket L x W x H: 160,5 x 31,5 x 80,5 mm
- motion / twilight sensor
- highly efficient solar panel
- incl. Li-Ion battery | 3,70V | 2200 mA

item	colour	colour temperature	light current	price
731116	dark grey	WW 3200 K	170 lm	**169,95 €**

1,60 W | SMD | 24 LED | Ra>80 | 110° | 180 ° | IP54





SOLAR PREMIUM I


- aluminium
- dimensions L x W x H: 200 x 151 x 1000 mm
- socket L x W x H: 80 x 151 x 4,5 mm
- motion / twilight sensor
- highly efficient solar panel
- incl. Li-Ion battery | 3,70V | 2200 mA

item	colour	colour temperature	light current	price
733046	dark grey	WW 3200 K	170 lm	**199,95 €**

1,60 W | SMD | 24 LED | Ra>80 | 110° | 180 ° | IP54

LUGH SOLAR

The LUGH SOLAR is a modern path luminaire for outdoor use, which thanks to the integrated twilight sensor automatically switches on at a preset value. At the same time, the shapely floor lamp reduces electricity costs thanks to the permanently installed solar panel on the top, which charges the integrated battery and thus enables flexible positioning, independent of installed power cables.







LUGH SOLAR

- aluminium diecast
- dimensions L x W x H: 140,5 x 140,5 x 340 mm
- socket L x W x H: 138,0 x 138,0 x 35,0 mm
- twilight sensor
- power consumption: 2,20 W
- incl. Li-Ion battery | 3,70V | 2200 mAh

item	colour	colour temperature	light current	price
733051	dark grey	WW 3000 K	130 lm	**139,95 €**

2,20 W | SMD | 26 LED | Ra>80 | 74° | IP54



With the kind support of Arte Classica Schinzel / www.arte-classica.de



OUTDOOR LIGHTS

362 bollard lights
386 surface mounted wall lights
424 ceiling and wall lights
430 built in wall lights
440 spherical and floor lamps
446 energy distributor
454 surface mounted and ground spike lights
468 wall washer
472 ground recessed lights
502 underwater lights
508 floodlight
516 display lights



page 364



364



page 365



page 365



page 366



page 366



page 367



page 369



page 370



page 372



page 374



page 374



page 375



page 375



page 376



page 377



page 377



page 379



page 380



page 382



page 385

bollard lights



ESTADA

- stainless steel
- dimensions H x Ø: 1000 x 100 mm
- socket Ø: 170 mm
- dimmable via optional illuminants

item	colour	price
730009	silver coloured	**119,95 €**

220-240 Volt | 1x max. 11 W | E27 | IP44

suitable illuminants on page 770-771
suitable mounting accessories for outdoor use from page 800



PORRIMA

- stainless steel
- socket H x Ø: 8 x 118 mm
- dimmable via optional illuminants

item	colour	dimensions H x Ø	price
733012	silver coloured brushed	500 x 76 mm	**59,95 €**
733028	silver coloured brushed	1000 x 76 mm	**69,95 €**

220-240 Volt | 1x max. 5 W | GU10 | IP44

suitable illuminants on page 770-771
suitable mounting accessories for outdoor use from page 800

NOVA

- stainless steel
- dimensions H x Ø: 1100 x 75 mm
- socket Ø: 110 mm
- dimmable via optional illuminants
- E27 socket suitable for A19 LED bulb

item	colour	price
730007	silver coloured brushed	**74,95 €**

220-240 Volt | 1x max. 40 W | E27 | LED | IP33

suitable mounting accessories for outdoor use from page 800





suitable wall light
page 392
730034

NOVA MOTION

- stainless steel
- dimensions H x Ø: 1100 x 75 mm
- socket Ø: 110 mm
- motion / twilight sensor
- E27 socket suitable for A19 LED bulb

item	colour	price
730032	silver coloured brushed	**89,95 €**

220-240 Volt | 1x max. 40 W | E27 | LED | IP33

suitable mounting accessories for outdoor use from page 800





suitable wall lights
page 392
730034

ZILLY II

- stainless steel
- dimensions L x W: 500 x 140 mm
- socket H x Ø: 7 x 100 mm
- swivelling luminaire head
- dimmable via optional illuminants

item	colour	price
733062	silver coloured	**89,95 €**

220-240 Volt | 1x max. 35 W | GU10 | LED | IP44

suitable illuminants on page 767
suitable mounting accessories for outdoor use from page 800





suitable wall lights page 391
731008
731009

ZILLY II

- stainless steel
- dimensions L x W: 1000 x 232 mm
- socket H x Ø: 7 x 100 mm
- swivelling luminaire head
- dimmable via optional illuminants

item	colour	price
733063	silver coloured	**129,95 €**

220-240 Volt | 2x max. 35 W | GU10 | LED | IP44

suitable illuminants on page 767
suitable mounting accessories for outdoor use from page 800





suitable wall lights page 391
731010
731011



ARBINTO

The ARBINTO with its high standing base and the light emission with E27 bulb as well as real glass frame reminds of a torch and creates an immediate feeling of warmth and security.



ARBINTO

- aluminium diecast
- dimensions L x W: 800 x 120 mm
- socket Ø: 140 mm
- dimmable via optional illuminants

item	colour	price
733061	anthracite	**119,95 €**

220-240 Volt | 1x max. 60 W | E27 | LED | IP44

suitable illuminants on page 770-771
suitable mounting accessories for outdoor use from page 800



FACADO

The floor lamps of the FACADO series have already been used for some time on paved walkways in the garden area. With FACADO, the classically elegant outdoor lights [IP44] become even more versatile. Thanks to the E27 socket, the light source can be changed as needed and adapted to the desired lighting mood. FACADO is available in two heights [65 and 100 cm]. This series is rounded off with the new energy distributor on page 453.



FACADO A + B

- aluminium diecast
- socket L x W: 110 x 110 mm
- dimmable via optional illuminants

item	colour	dimensions L x W x H	price
730332	anthracite	110 x 110 x 650 mm	**119,95 €**
730333	brown	110 x 110 x 650 mm	**119,95 €**
733018	anthracite	110 x 110 x 1000 mm	**176,95 €**

220-240 Volt | 1x max. 20 W | E27 | LED | IP44

suitable illuminants on page 770-771
suitable mounting accessories for outdoor use from page 800



suitable
wall light
page 392
731059



suitable energy
distributor
page 453
733064
733065

CATA IV

The CATA IV series is not only convincing as a modern path luminaire, but also as an independent light and design object in the design of outdoor areas. The LEDs not only provide wide-area illumination of walkways and entrance areas, but also inevitably draw the eye to the striking frame construction. Available in three sizes, the CATA IV models can also be combined very well.



CATA IV

- aluminium diecast
- socket L x W x H: 145 x 55 x 20 mm

item	colour	colour temperature	light current	dimensions L x W x H	price
733040	anthracite	ww 3000 K	170 lm	151 x 61 x 500 mm	**189,95 €**
733041	anthracite	ww 3000 K	170 lm	151 x 61 x 700 mm	**209,95 €**
733042	anthracite	ww 3000 K	170 lm	151 x 61 x 1000 mm	**235,95 €**

100-240 Volt | 3,50 W | SMD | 36 LED | Ra>80 | 120° | IP54

suitable mounting accessories for outdoor use from page 800



CHERTAN

With its unusual material mix of die-cast aluminium housing and a concrete base, the CHERTAN outdoor floor lamp stands out visually from other models. With its pleasant warm white light and a beam angle of 120° including motion and twilight switch, the outdoor luminaire is perfect for decorative use in entrance areas, on walkways or in the garden.



CHERTAN

- aluminium diecast | concrete
- socket L x W x H: 160 x 30 x 40 mm

item	colour	colour temperature	light current	dimensions L x W x H	price
733043	grey	ww 3000 K	480 lm	170 x 72 x 450 mm	**199,95 €**
733044	grey	ww 3000 K	530 lm	170 x 72 x 600 mm	**219,95 €**
733045	grey	ww 3000 K	640 lm	170 x 72 x 1000 mm	**239,95 €**

100-277 Volt | 12 W | SMD | 72 LED | Ra>90 | 120° | IP54

suitable mounting accessories for outdoor use from page 800



suitable wall light page 419 **731113**





RUKBAT

- aluminium diecast
- socket L x W x H: 145 x 145 x 20 mm

item	colour	colour temperature	light current	dimensions L x W x H	price
733047	anthracite	WW 3000 K	670 lm	85 x 85 x 500 mm	**159,95 €**
733048	anthracite	WW 3000 K	670 lm	85 x 85 x 800 mm	**219,95 €**

100-240 Volt | 12,5 W | COB | 1 LED | Ra>80 | IP65

suitable mounting accessories for outdoor use from page 800



ANTLIAE

- aluminium diecast
- socket L x W x H: 152 x 121 x 20 mm

item	colour	colour temperature	light current	dimensions L x W x H	price
733033	dark grey	WW 3000 K	380 lm	152 x 121 x 150 mm	**109,95 €**
733034	dark grey	WW 3000 K	650 lm	152 x 121 x 500 mm	**139,95 €**
733035	dark grey	WW 3000 K	650 lm	152 x 121 x 800 mm	**159,95 €**

100-240 Volt | 12 W | COB | 1 LED | Ra>80 | IP65

suitable mounting accessories for outdoor use from page 800



TRILA + TRILA II

- aluminium diecast
- dimensions L x W x H: 128,5 x 123 x 800 mm
- socket Ø: 120 mm

item	colour	colour temperature	light current	price
730364	anthracite	ww 3000 K	361 lm	**159,95 €**
730365	anthracite	ww 3000 K	361 lm	**159,95 €**

220-240 Volt | 6 W | SMD | 90 LED | IP44

suitable mounting accessories for outdoor use from page 800



BEACON II MOTION

- aluminium diecast
- socket L x W x H: 102 x 102 x 7 mm
- motion / twilight sensor

item	colour	colour temperature	light current	dimensions L x W x H	price
733006	anthracite	ww 3000 K	290 lm	70 x 70 x 500 mm	**139,95 €**
733008	anthracite	ww 3000 K	290 lm	70 x 70 x 800 mm	**159,95 €**

220-240 Volt | 6 W | SMD | 30 LED | Ra>80 | 120° | IP44

suitable mounting accessories for outdoor use from page 800



suitable wall light page 400 **731016**

ORTIS

- aluminium diecast
- dimensions L x Ø: 1000 x 120 mm
- light dimmed by the louvre insert, light directed downwards

item	colour	colour temperature	light current	price
733004	dark grey	WW 3000 K	510 lm	**219,95 €**

220-240 Volt | 15 W | COB | 1 LED | Ra>80 | 360° | IP54

suitable mounting accessories for outdoor use from page 800





suitable wall light page 393 **731031**



IRETTA

- aluminium diecast
- dimensions L x W x H: 165 x 192 x 700 mm
- socket L x W: 165 x 85 mm

item	colour	colour temperature	light current	price
730354	anthracite	ww 3000 K	240 lm	**159,95 €**

220-240 Volt | 4 W | SMD | 48 LED | Ra>80 | 110° | IP44

suitable mounting accessories for outdoor use from page 800





suitable wall light page 405 **730395**

reddot award 2017 winner

ROBI FLEX

- aluminium diecast
- dimensions L x W x H: 35 x 80 x 1000 mm
- socket L x W: 115 x 73 mm
- swivelling luminaire head

item	colour	colour temperature	light current	price
733007	dark grey	ww 3000 K	700 lm	**229,95 €**

110-240 Volt | 10 W | SMD | 48 LED | Ra>80 | 110° | 90° | IP54

suitable mounting accessories for outdoor use from page 800





suitable wall light page 405 **731068**



TAYGETA

The outdoor lights of the TAYGETA series are eye-catchers – and use their bent housing shape sensibly for illumination of walkways on both sides, walls and objects from different angles on both sides. Available in two sizes [60 cm and 100 cm], the TAYGETA 1000 is also optionally available with integrated, energy-saving motion and twilight sensor.



TAYGETA 600 + 1000 + 1000 MOTION

- aluminium diecast
- dimensions L x W: 220 x 148 mm
- socket L x W x H: 220 x 90 x 10 mm

item	colour	colour temperature	light current	dimensions H		price
733037	dark grey	WW 3000 K	1500 lm	600 mm		**229,95 €**
733038	dark grey	WW 3000 K	1500 lm	1000 mm		**259,95 €**
733039	dark grey	WW 3000 K	1500 lm	1000 mm	motion / twilight sensor	**279,95 €**

110-240 Volt | 16 W | SMD | 100 LED | Ra>80 | 110° | IP54

suitable mounting accessories for outdoor use from page 800

TUCANAE

With its slim, unadorned housing design, TUCANAE is a modern outdoor luminaire that can be integrated almost anywhere. The 100 cm high bollard luminaire radiates its warm white light downwards at an angle onto walkways and other surfaces and, in the MOTION version, has an integrated twilight switch with adjustable brightness threshold and runtime.









TUCANAE + TUCANAE MOTION

- modern, minimalist design
- brightness threshold and running time adjustable [733068]
- aluminium diecast
- dimensions W x H: 206 x 1000 mm
- socket L x W x H: 120 x 180 x 10 mm

suitable wall lights page 404
731133
731144

item	colour	colour temperature	light current		price
733069	dark grey	ww 3000 K	1650 lm		**239,95 €**
733068	dark grey	ww 3000 K	1650 lm	motion / twilight sensor	**259,95 €**

110-240 Volt | 16 W | SMD | 100 LED | Ra>80 | 110° | IP65

suitable mounting accessories for outdoor use from page 800



BERMUDA

Admittedly, a big name for a small luminaire. But in its design, the BERMUDA series undoubtedly presents itself as exciting as the well-known triangle. The small light dwarf is an enrichment for every garden and fits like a small mushroom into every outdoor environment. And by the way, it also cuts a fine figure as a wall luminaire.





suitable
wall light
IP65
page 418
731124



suitable
ground spike
lights
IP65
page 456
733060
733059



suitable
wall lights
page 170
342159
342160



suitable
table and
floor lights
page 212/213
346018
346017
343029
343028

BERMUDA

- design by Johannes Tomm
- eyecatcher outdoor lighting
- 360° beam angle
- aluminium diecast
- dimensions L x Ø: 600 x 200 mm
- dimmable via phase control or phase cut-off

item	colour	colour temperature	light current	price
733056	anthracite	WW 3000 K	600 lm	**219,95 €**

220-240 Volt | 10 W | SMD | 72 LED | Ra>80 | 360° | IP65

suitable mounting accessories for outdoor use from page 800



With the kind support of Arte Classica Schinzel / www.arte-classica.de



With the kind support of Arte Classica Schinzel / www.arte-classica.de

ALHENA

Thanks to its SMD construction, the modern, towering ALHENA luminaire with 360° light distribution not only illuminates driveways, car parks, gardens or terraces, but also appears as a design element itself.



ALHENA

- timeless design
- high luminous intensity
- homogeneous light distribution in all directions
- aluminium diecast
- socket Ø: 130 mm

item	colour	colour temperature	light current	dimensions H x Ø	price
733057	anthracite	WW 3000 K	2965 lm	900 x 110 mm	**239,95 €**
733058	anthracite	WW 3000 K	3900 lm	1500 x 110 mm	**319,95 €**

220-240 Volt | SMD | 240 LED | Ra>80 | 360° | IP65

suitable mounting accessories for outdoor use from page 800



page 390



page 390



page 391



page 391



page 392



page 392



page 393



page 394



page 395



page 396



page 396



page 399



page 399



page 400



page 400



page 403



page 403



page 404



page 405

surface mounted wall lights



page 405



page 406



page 407



page 407



page 408



page 408



page 409



page 409



page 411



page 411



page 412



page 412



page 414



page 414



page 415



page 415



page 416



page 416



page 417



page 418



page 419



page 420



page 421



page 423



ZILLY DOWN

- stainless steel
- dimensions L x W x H x Ø: 115 x 115 x 107 x 60 mm
- socket L x W x H: 80 x 50 x 25 mm
- dimmable via optional illuminants

item	colour	price
731005	silver coloured	**39,95 €**

220-240 Volt | 1x max. 35 W | GU10 | LED | IP44

suitable illuminants on page 767





ZILLY UP AND DOWN + ZILLY UP AND DOWN MOTION

- stainless steel
- dimmable via optional illuminants [only 731006]

item	colour	dimensions L x W x H x Ø	socket L x W x H x Ø	price
731006	silver coloured	163 x 107 x 60 x 60 mm	80 x 50 x 27 mm	**54,95 €**
731007	silver coloured	215 x 110 x 70 x 60 mm	150 x 68 x 27 mm motion / twilight sensor	**89,95 €**

220-240 Volt | 2x max. 35 W | GU10 | LED | IP44

suitable illuminants on page 767







ZILLY II DOWN + ZILLY II DOWN MOTION

suitable bollard light page 366 **733002**

- stainless steel
- dimmable via optional illuminants [only 731008]

item	colour		dimensions L x W x H x Ø	socket L x W x H x Ø		price
731008	☐	silver coloured	125 x 60 x 105 x 60 mm	100 x 43 x 22 mm		**49,94 €**
731009	☐	silver coloured	150 x 68 x 106 x 60 mm	150 x 68 x 27 mm	motion / twilight sensor	**79,95 €**

220-240 Volt | 1x max. 35 W | GU10 | LED | IP44

suitable illuminants on page 767







ZILLY II UP AND DOWN + ZILLY II UP AND DOWN MOTION

suitable bollard light page 366 **733003**

- stainless steel
- dimmable via optional illuminants [only 731010]

item	colour		dimensions L x W x H x Ø	socket L x W x H x Ø		price
731010	☐	silver coloured	178 x 60 x 105 x 60 mm	102 x 42 x 22 mm		**84,95 €**
731011	☐	silver coloured	220 x 70 x 108 x 60 mm	148 x 67 x 25 mm	motion / twilight sensor	**99,95 €**

220-240 Volt | 2x max. 35 W | GU10 | LED | IP44

suitable illuminants on page 767



NOVA II

- stainless steel
- dimensions L x W x H x Ø: 388 x 145 x 110 x 75 mm
- socket H x Ø: 25 x 110 mm
- motion / twilight sensor
- E27 socket suitable for A19 LED bulb

item	colour	price
730034	silver coloured	**69,95 €**

220-240 Volt | 1x max. 40 W | E27 | IP44



suitable
bollard light
page 365
730032





suitable
bollard lights
page 369
730332
733018

FACADO A

- aluminium diecast
- dimensions L x W x H: 243 x 110 x 150 mm
- socket L x W x H: 120 x 90 x 35 mm
- dimmable via optional illuminants

item	colour	price
731059	anthracite	**99,95 €**

220-240 Volt | 1x max. 20 W | E27 | LED | IP54

suitable illuminants on page 770-771



suitable energy
distributor
page 453
733064
733065



ORTIS

- aluminium diecast
- dimensions L x W x H x Ø: 260 x 120 x 181 x 120 mm
- socket L x W x H: 100 x 77 x 67 mm

item	colour	colour temperature	light current	price
731031	dark grey	WW 3000 K	510 lm	**179,95 €**

220-240 Volt | 15 W | COB | 1 LED | Ra>80 | 360° | IP54



suitable bollard light page 376 **733004**





ALBALDAH MOTION

- timeless design
- sophisticated effect lighting
- aluminium diecast
- dimensions L x H: 220 x 120 mm
- motion sensor

item	colour	colour temperature	light current	price
731132	grey	WW 3000 K	645 lm	**109,95 €**

220-240 Volt | 13,5 W | SMD | 28 LED | Ra>80 | 120° | IP65





ADEBAR MOTION

- timeless design
- aluminium diecast
- dimensions L x Ø: 218 x 160 mm
- motion sensor

item	colour	price
731137	grey	**99,95 €**

220-240 Volt | 1x max. 60 W | E27 | LED | IP44

suitable illuminants on page 770-771



SAIPH & SARGAS

The classic outdoor luminaires combine proven luminaire design from over 100 years with modern conveniences. The timeless wall-mounted luminaires of the new SAIPH and SARGAS series evoke reminiscences of iconic designs from various decades and impress with high-quality real glass that is not only resistant to scratches but also weather and UV-resistant.



SAIPH

- rustic design
- aluminium
- dimensions L x W x H: 170 x 149 x 280 mm
- dimmable via optional illuminants

item	colour	price
341244	black	**49,95 €**

220-240 Volt | 1x max. 60 W | E27 | LED | IP23

suitable illuminants on page 770-771



SARGAS

- rustic design
- aluminium
- dimensions L x W x H: 178 x 151 x 318 mm
- dimmable via optional illuminants

item	colour	price
341245	black	**49,95 €**

220-240 Volt | 1x max. 60 W | E27 | LED | IP23

suitable illuminants on page 770-771





GRUMIUM

Modular, compact, with great effect – GRUMIUM wall-mounted luminaire can be installed on terraces, house walls or in the entrance area of residential environments and, thanks to its optional covers with different designs, is a flexible universal solution for many applications. The permanently installed and energy-saving LEDs with a maximum of 10 watts are surrounded by a diffuser made of milky plastic and produce a pleasant warm white light with a luminous flux of 450 lm. With the GRUMIUM ANGULAR CCT I, even the color temperature can be adjusted between warm white and neutral white via dip switch. The GRUMIUM outdoor luminaire with its die-cast aluminum housing is available in square and rounded versions and has IP54 protection.



GRUMIUM ANGULAR CCT I

- aluminium diecast
- dimensions L x W x H: 100 x 70 x 200 mm
- socket W x H x Ø: 95 x 15 x 195 mm
- light color adjustable via DIP switch

item	colour		colour temperature		light current	price
620123		dark grey | borders	WW NW	3000/4000 K	450 lm	**99,95 €**
620124		dark grey | lines diagonal	WW NW	3000/4000 K	205 lm	**99,95 €**
620125		dark grey | lines horizontally	WW NW	3000/4000 K	280 lm	**99,95 €**
620126		dark grey | lines vertical	WW NW	3000/4000 K	300 lm	**99,95 €**
620127		dark grey | upside/below	WW NW	3000/4000 K	440 lm	**99,95 €**

220-240 Volt | 10 W | SMD | 64 LED | Ra>80 | 138° | IP54



GRUMIUM ROUND I

- aluminium diecast
- dimensions L x W x H: 100 x 70 x 200 mm
- socket W x H x Ø: 95 x 15 x 195 mm

item	colour		colour temperature		light current	price
620128		dark grey | upside/below	WW	3000 K	325 lm	**99,95 €**
620129		dark grey | Taille	WW	3000 K	210 lm	**99,95 €**
620130		dark grey | lines horizontally	WW	3000 K	250 lm	**99,95 €**

100-240 Volt | 10 W | SMD | 32 LED | Ra80 | 180° | IP54



BEACON MOTION

- aluminium diecast
- dimensions L x W x H: 250 x 68 x 106 mm
- socket L x W x H: 68 x 68 x 5 mm
- motion / twilight sensor

item	colour	colour temperature	light current	price
731016	anthracite	ww 3000 K	290 lm	**119,95 €**

220-240 Volt | 6 W | SMD | 30 LED | Ra>80 | 120° | | IP44



suitable
bollard lights
page 375
733006
733008



LACERTAE

- aluminium diecast | glass
- dimensions L x W x H: 180 x 256 x 370 mm
- socket L x W x H: 98 x 30 x 105 mm
- motion sensor

item	colour	colour temperature	light current	price
731112	dark grey	ww 3000 K	440 lm	**189,95 €**

110-240 Volt | 9 W | SMD | 96 LED | Ra>80 | 120° | | IP54



suitable battery
table light
page 352
346009



LACERTAE

LACERTAE is a light catcher – and guaranteed an eye-catcher. Matching the portable version, the LACERTAE also convinces as a rustic wall lamp including motion detector on brick and natural stone walls.



ALKES

The ALKES series is not a classic wall-mounted luminaire, but with its SMD LED panel is reminiscent of a floodlight. The highlight: the upper part of the housing is tilted forward by 45° from the façade to direct the warm white light specifically onto the surface to be illuminated. In addition, the ALKES with its modern design and rounded edges cuts a great figure even when switched off.






ALKES

- modern design
- high light output
- homogeneous light distribution
- aluminium diecast

item	colour	colour temperature	light current	power	dimensions L x W x H	price
731138	dark grey	ww 3000 K	920 lm	21 W	200 x 126 x 184 mm	**109,95 €**
731140	dark grey	ww 3000 K	1720 lm	36 W	297 x 165 x 240 mm	**169,95 €**








ALKES MOTION

- modern design
- high light output
- homogeneous light distribution
- aluminium diecast
- motion sensor

item	colour	colour temperature	light current	power	dimensions L x W x H	price
731139	dark grey	ww 3000 K	735 lm	21 W	200 x 126 x 184 mm	**129,95 €**
731141	dark grey	ww 3000 K	1720 lm	36 W	297 x 165 x 240 mm	**199,95 €**







TUCANAE + TUCANAE MOTION

- modern, minimalist design
- brightness threshold and running time adjustable
- aluminium diecast
- dimensions L x W x H: 140 x 172 x 219 mm
- socket L x W x H: 125 x 135 x 15 mm

item	colour	colour temperature	light current		price
731144	dark grey	ww 3000 K	1650 lm		**165,95 €**
731133	dark grey	ww 3000 K	1650 lm	motion / twilight sensor	**175,95 €**

110-240 Volt | 16 W | SMD | 100 LED | Ra>80 | 110° | IP65



suitable bollard lights page 380
733068
733069



reddot award 2017
winner



ROBI FLEX

- aluminium diecast
- dimensions L x W x H: 120 x 45 x 125 mm
- socket L x W: 78 x 45 mm

item	colour	colour temperature	light current	price
731068	dark grey	WW 3000 K	700 lm	**179,95 €**

110-240 Volt | 10 W | SMD | 48 LED | Ra>80 | 110° | | 0-90° | IP54



suitable bollard light
page 377
733007



IRETTA

- aluminium diecast
- dimensions L x W x H: 150 x 125 x 97,5 mm
- socket L x W: 121 x 93 mm
- motion / twilight sensor

item	colour	colour temperature	light current	price
730395	anthracite	WW 3000 K	370 lm	**169,95 €**

220-240 Volt | 6 W | SMD | 64 LED | Ra>80 | | IP54



suitable bollard light
page 377
730354

ACHERNAR

ACHERNAR with a lot of flexibility: the GU10 base in the simple aluminum die-cast housing allows free choice of illuminant for any application.



ACHERNAR DOWN + UP AND DOWN

- timeless design
- aluminium diecast
- dimmable via optional illuminants

item	colour	power	radiation characteristics	dimensions W x H x Ø	price
731130	anthracite	1x max. 50 W	downwards	95 x 108 x 63 mm	**39,95 €**
731131	anthracite	2x max. 35 W	up- / downwards	95 x 158 x 63 mm	**52,95 €**

220-240 Volt | GU10 | LED | IP65

suitable illuminants on page 767



MOBBY II


The conversion artist – the cable outlet is not exactly where the light is needed? No problem for the MOBBY II. Thanks to its swiveling head, areas can be illuminated that would otherwise be inaccessible. The MOBBY II is equipped with the powerful and cost-efficient 9 Watt LED module.



MOBBY II

- aluminium diecast
- dimensions H x Ø: 100 x 84 mm
- socket H x Ø: 34 x 95 mm
- dimmable via phase control or phase cut-off
- beam angle can be changed with optional interchangeable reflector

item	colour		colour temperature		light current	price
731021		anthracite	ww	3000 K	810 lm	**179,95 €**






MOBBY II SINGLE + DOUBLE

- aluminium diecast
- socket L x W x H: 120 x 80 x 34 mm
- beam angle can be changed with optional interchangeable reflector

item	colour		colour temperature		light current	power	radiation characteristics	dimensions L x W x H x Ø	price
731072		anthracite	ww	3000 K	810 lm	9 W	downwards	84 x 124 x 120 x 84 mm	**179,95 €**
731071		anthracite	ww	3000 K	1620 lm	19 W	up- / downwards	84 x 124 x 220 x 84 mm	**299,95 €**



JABBAH

The square JABBAH uses integrated COB LEDs in warm white and emits its light asymmetrically at 75° in a cone shape onto walls - in the simple version with 915 lumens, as UP AND DOWN version with a total of 1850 lumens. In addition, the double-sided JABBAH can be dimmed to 60% light output via a dip switch if a more discreet light output is desired.



JABBAH + UP AND DOWN

- modern design
- dimmable to 60% via dip switch
- high luminous intensity
- aluminium diecast
- dimensions L x W x H: 150 x 150 x 150 mm

item	colour	colour temperature	light current	power	radiation characteristics	price
731128	dark grey	ww 3000 K	915 lm	13 W	downwards	**229,95 €**
731127	dark grey	ww 3000 K	1850 lm	25 W	up- / downwards	**299,95 €**

220-240 Volt | COB | 1-2 LED | Ra>80 | 75° | + − | IP65







CUBODO

- aluminium diecast
- dimensions L x W x H: 90 x 110 x 90 mm
- socket L x W x H: 59 x 59 x 20 mm

item	colour	colour temperature	light current	price
730380	white	ww 3000 K	270 lm	**119,95 €**
730329	brown	ww 3000 K	270 lm	**119,95 €**
730328	anthracite	ww 3000 K	270 lm	**119,95 €**

220-240 Volt | 5 W | 2 LED | Ra>80 | 80°/40° | IP54





CUBODO II SINGLE + DOUBLE

- aluminium diecast
- dimensions L x W x H: 108 x 108 x 115 mm
- socket L x W: 108 x 108 mm

item	colour	colour temperature	light current	power	radiation characteristics	price
731026	white	ww 3000 K	600 lm	7 W	downwards	**149,95 €**
731025	silver coloured	ww 3000 K	600 lm	7 W	downwards	**149,95 €**
731024	dark grey	ww 3000 K	600 lm	7 W	downwards	**149,95 €**
731020	white	ww 3000 K	1260 lm	14 W	up- / downwards	**169,95 €**
731019	silver coloured	ww 3000 K	1260 lm	14 W	up- / downwards	**169,95 €**
731015	dark grey	ww 3000 K	1260 lm	14 W	up- / downwards	**169,95 €**

220-240 Volt | COB | 1 LED | Ra>80 | 19° | IP54




CUBODO II SINGLE DG MINI + DOUBLE DG MINI

- aluminium diecast
- socket L x W x H: 65 x 65 x 20 mm

item	colour	colour temperature	light current	power	radiation characteristics	dimensions L x W x H	price
731029	dark grey	ww 3000 K	220 lm	4,50 W	downwards	90 x 68 x 70 mm	**109,95 €**
731030	dark grey	ww 3000 K	440 lm	9,00 W	up- / downwards	90 x 68 x 108 mm	**139,95 €**

220-240 Volt | 1 LED | Ra77 | 46° | IP54



ARCTURUS

The ARCTURUS LED wall-mounted luminaire presents itself in a modern cube design [also available in an elongated form] and is suitable for flexible lighting in outdoor areas. The beam angle of the IP54 luminaire can be adjusted between 0° and 90° via an integrated shutter to generate a different light pattern depending on the application requirements. Protected in the dark grey die-cast aluminium housing are the two high-power LEDs that produce a warm white, 5.5 W light.



ARCTURUS I

- aluminium diecast
- dimensions L x W x H: 79 x 110 x 172 mm
- socket L x W x H: 68 x 110 x 110 mm
- adjustable beam angle

item	colour	colour temperature	light current	price
731099	dark grey	WW 3000 K	200 lm	**104,95 €**

220-240 Volt | 5,50 W | 2 LED | Ra>80 | 0-90° | IP54







ARCTURUS II

- aluminium diecast
- dimensions L x W x H: 140 x 105 x 145 mm
- socket L x W x H: 75 x 100 x 120 mm
- adjustable beam angle

item	colour	colour temperature	light current	price
731100	dark grey	WW 3000 K	200 lm	**104,95 €**

220-240 Volt | 5,50 W | 2 LED | Ra>80 | 0-90° | IP54



KIMBALI ANGULAR

- aluminium
- dimensions L x W x H: 160 x 90 x 50 mm
- socket L x W: 148 x 85 mm

item	colour	colour temperature	light current	price
731014	anthracite	ww 3000 K	370 lm	**109,95 €**

220-240 Volt | 6 W | COB | 2 LED | Ra>80 | 80° | IP44





AGUDO II SINGLE + DOUBLE

- aluminium diecast
- socket L x W: 75 x 75 mm

item	colour	colour temperature	light current	power	radiation characteristics	dimensions L x W x H	price
730381	anthracite	ww 3000 K	70 lm	2 W	downwards	63 x 80 x 75 mm	**64,95 €**
730382	anthracite	ww 3000 K	140 lm	3 W	up- / downwards	140 x 80 x 65 mm	**89,95 €**

220-240 Volt | 1-2 LED | Ra>80 | 90° | IP54







ANCHA I + II

- aluminium diecast
- socket L x W x H: 74 x 12 x 83 mm

item	colour	colour temperature	light current	power	radiation characteristics	dimensions L x W x H	price
731087	dark grey	ww 3000 K	260 lm	5,50 W	downwards	80 x 92 x 97 mm	**89,95 €**
731088	dark grey	ww 3000 K	530 lm	10,00 W	up- / downwards	80 x 92 x 105 mm	**119,95 €**

220-240 Volt | 1 LED | Ra>80 | 113° | IP54



CUBE

- aluminium diecast
- dimensions L x W x H: 70 x 120 x 60 mm
- socket L x W: 70 x 60 mm

item	colour	colour temperature	light current	price
730355	anthracite	ww 2700 K	400 lm	**149,95 €**

220-240 Volt | 8 W | SMD | 96 LED | Ra>80 | 120° | IP54





RILONGO

- aluminium diecast
- dimensions L x W x H: 250 x 110 x 103 mm
- socket L x W: 250 x 110 mm
- dimmable via optional illuminants

item	colour	price
730330	anthracite	**74,95 €**
730331	brown	**74,95 €**

220-240 Volt | 1x max. 18 W | E27 | LED | IP54

suitable illuminants on page 770-771



WALL LINE III

- aluminium diecast
- dimensions L x W x H: 250 x 110 x 110 mm
- socket L x W: 250 x 103 mm
- dimmable via optional illuminants

item	colour	price
731060	anthracite	**74,95 €**

220-240 Volt | 1x max. 18 W | E27 | LED | IP54

suitable illuminants on page 770-771






LINEAR I SINGLE + LINEAR II DOUBLE

- aluminium diecast
- socket L x W x H: 242 x 53 x 15 mm

item	colour	colour temperature	light current	radiation characteristics	power	dimensions H x T x B	price
731135	dark grey	ww 3000 K	600 lm	downwards	8,5 W	60 x 60 x 250 mm	**145,95 €**
731134	dark grey	ww 3000 K	1230 lm	downwards	14,0 W	60 x 60 x 500 mm	**189,95 €**
731136	dark grey	ww 3000 K	1155 lm	down- / upwards	14,0 W	60 x 60 x 250 mm	**179,95 €**
731129	dark grey	ww 3000 K	1760 lm	down- / upwards	20,0 W	60 x 60 x 500 mm	**209,95 €**

220-240 Volt | 22/44 LED | Ra>80 | 100° | IP65

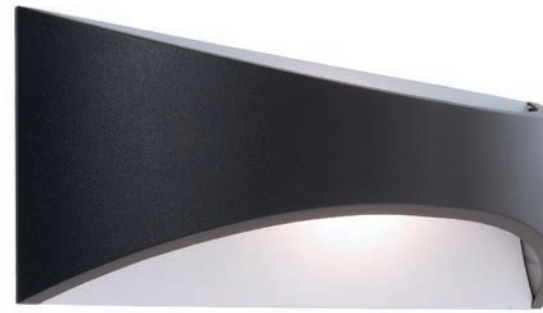

URIA 10

- aluminium diecast
- dimensions L x W x H: 300 x 97 x 120 mm
- socket L x W x H: 270 x 20 x 85 mm

item	colour	colour temperature	light current	price
731033	anthracite	ww 3000 K	408 lm	**109,95 €**

220-240 Volt | 10 W | COB | 1 LED | Ra>80 | 120° | IP65





SEGIN

The SEGIN LED wall-mounted luminaire is suitable for versatile outdoor use and illuminates outdoor and entrance areas of buildings and can also be used as a house number luminaire if required. In addition to the robust die-cast aluminium housing, the SEGIN also has a round shutter that allows the direction of light to be flexibly adjusted to the respective application.





SEGIN

- adjustable bezel
- aluminium diecast
- dimensions L x W x H x Ø: 223 x 130 x 105 x 105 mm
- socket L x W x H: 185 x 63 x 30 mm

item	colour	colour temperature	light current	price
731118	anthracite	WW 3000 K	370 lm	**129,95 €**

100-240 Volt | 13 W | SMD | 12 LED | Ra>80 | | 90° | IP65

BERMUDA

Admittedly, a big name for a small luminaire. But in its design, the BERMUDA series is undoubtedly just as exciting as the well-known triangle. The small light dwarf is an enrichment for every garden and fits like a small mushroom into every outdoor environment. And by the way, it also cuts a fine figure as a wall luminaire.



suitable
bollard light
page 382
733056



suitable
ground spike
lights
IP65
page 456
733060
733059





suitable
wall lights
page 170
342159
342160



suitable
table and
floor lights
page 212/213
346018
346017
343029
343028

BERMUDA

- design by Johannes Tomm
- eyecatcher outdoor lighting
- 360° beam angle
- aluminium diecast
- dimensions H x Ø: 142 x 200 mm
- socket H x Ø: 79 x 70 mm
- dimmable via phase control or phase cut-off

item	colour	colour temperature	light current	price
731124	anthracite	ww 3000 K	600 lm	**129,95 €**

220-240 Volt | 10 W | SMD | 72 LED | Ra>80 | 360° | IP65

CHERTAN

With its unusual material mix of die-cast aluminium housing and a concrete base, the CHERTAN outdoor wall luminaire stands out visually from other models. With its pleasant warm white light and a beam angle of 120° including motion and twilight switch, the outdoor luminaire is perfect for decorative use in entrance areas.





CHERTAN

- aluminium diecast | concrete
- dimensions L x W x H: 170 x 90 x 302 mm
- socket L x W x H: 110 x 22 x 800 mm
- motion / twilight sensor

item	colour	colour temperature	light current	price
731113	anthracite, concrete	ww 3000 K	570 lm	**179,95 €**

100-277 Volt | 13,50 W | SMD | 72 LED | Ra>90 | 120° | | IP54

suitable bollard lights page 372
733043
733044
733045



LYNCIS

The LYNCIS LED wall-mounted luminaire not only impresses with its sophisticated and filigree design [winner of the Red Dot Design Award 2017], but also with its outdoor properties. The compact IP65-certified outdoor luminaire sits in a dark grey die-cast aluminium housing and with its 96 LEDs produces a 10-watt, warm white light [500 lm] that integrates seamlessly into a wide range of outdoor applications.



reddot award 2017
winner

LYNCIS

- aluminium diecast
- dimensions L x W x H: 300 x 142 x 315 mm
- socket L x W x H: 95 x 95 x 18 mm

item	colour	colour temperature	light current	price
731102	dark grey	ww 3000 K	500 lm	**135,95 €**

220-240 Volt | 10 W | SMD | 96 LED | Ra>80 | 170° | IP65





VOLANTIS

- aluminium diecast
- dimensions L x W x H: 300 x 300 x 47 mm
- socket L x W x H: 165 x 165 x 25 mm

item	colour	colour temperature	light current	price
731109	dark grey	WW 3000 K	1300 lm	**229,95 €**

110-240 Volt | 16 W | SMD | 100 LED | Ra>80 | 120° | IP65




7c

GIANFAR

The elegant GIANFAR outdoor wall light convinces with a classic and expressive design. Practical: The sticker set included in the scope of delivery allows you to quickly and easily transform the GIANFAR into a house number light if required.



GIANFAR

- aluminium diecast
- dimensions L x W x H: 161 x 59 x 211 mm
- socket L x W x H: 145 x 17 x 73 mm
- suitable as house number light

item	colour	colour temperature	light current	price
731119	dark grey	WW 3000 K	930 lm	**115,95 €**

100-240 Volt | 12 W | SMD | 60 LED | Ra>80 | 120° | IP54



accessories

948139 numbers set | numbers each 3x [0 to 9] and letters each 1x [A to J] **8,95 €**



page 426



page 426



page 427



page 427



page 428



page 428



page 429

ceiling and wall lights






MOB ROUND I + SQUARE II

- aluminium diecast
- dimmable via optional illuminants

item	colour		dimensions H x Ø / L x W x H	price
730407	☐	white	92 x 108 mm	**69,95 €**
730408	■	anthracite	92 x 108 mm	**69,95 €**
730409	☐	white	108 x 108 x 100 mm	**81,95 €**
730410	■	anthracite	108 x 108 x 100 mm	**81,95 €**

220-240 Volt | 1x max. 9 W | GX53 | LED | IP54

suitable illuminants on page 774




CETI

- aluminium diecast
- dimensions L x W x H: 85 x 85 x 99 mm
- dimmable via phase control or phase cut-off

item	colour		colour temperature	light current	price
348045	☐	white	ww 3000 K	730 lm	**179,95 €**
348046	■	black	ww 3000 K	730 lm	**169,95 €**

220-240 Volt | 9,20 W | COB | 1 LED | Ra>80 | 35° | + – | IP44





SCUTI I + II

- stainless steel
- dimmable via optional illuminants

item	colour	dimensions H x Ø / L x W x H	price
731053	silver coloured brushed	85 x 285 mm	**79,95 €**
731052	silver coloured brushed	285 x 285 x 85 mm	**79,95 €**

220-240 Volt | 2x max. 11 W | E27 | LED | IP44

suitable illuminants on page 770-771





AURIGAE

- aluminium diecast
- dimensions L x W x H: 250 x 250 x 60 mm
- socket L x W x H: 190 x 190 x 20 mm

item	colour	colour temperature	light current	price
348121	white	WW 3000 K	1550 lm	**119,95 €**
348120	anthracite	WW 3000 K	1550 lm	**119,95 €**

220-240 Volt | 20 W | SMD | 172 LED | Ra>80 | 110° | IP65





ASCELLA + ARNEB

- aluminium diecast
- socket H x Ø: 12 x 270 mm

item	colour	colour temperature	light current	dimensions H x Ø / L x W x H	price
348069	dark grey	ww 3000 K	2300 lm	50 x 340 mm	**229,95 €**
348070	dark grey	ww 3000 K	2300 lm	340 x 340 x 50 mm	**229,95 €**

220-240 Volt | 27 W | SMD | 299 LED | Ra>80 | 113° | IP54







QUADRATA I + II + III

- plastic

item	colour	colour temperature	light current	power	dimensions L x W x H	socket L x W x H	price
348011	grey	ww 3000 K	680 lm	10 W	220 x 220 x 56 mm	190 x 190 x 10 mm	**109,95 €**
348009	grey	ww 3000 K	1110 lm	16 W	296 x 296 x 78 mm	230 x 230 x 10 mm	**119,95 €**
348007	grey	ww 3000 K	1280 lm	20 W	400 x 400 x 93 mm	312 x 312 x 10 mm	**169,95 €**

220-240 Volt | SMD | LED | Ra>80 | 115° | IP65



MENSAE ROUND + ANGULAR

item	colour	colour temperature	light current	dimensions H x Ø / L x W x H	price
348072	dark grey	WW 3000 K	1340 lm	48 x 300 mm	**229,95 €**
348071	dark grey	WW 3000 K	1240 lm	300 x 300 x 48 mm	**229,95 €**

220-240 Volt | 18 W | SMD | 96 LED | Ra>80 | 115° | | IP54





page 432



page 432



page 434



page 434



page 434



page 437



page 437



page 437



page 437



page 439



page 439



page 439



page 439

built in wall lights



SIDE II WW

- aluminium diecast
- dimensions L x W x H: 171 x 106 x 65 mm
- dimmable via optional illuminants

item	colour	price
100028	silver coloured	**79,95 €**

220-240 Volt | 1x max. 40 W | G9 | LED | 160x98 | 84 | IP65

suitable illuminants on page 766



SIDE III LED RGB

- aluminium diecast
- dimensions L x W x H: 171 x 106 x 65 mm
- dimmable via optional controller

item	colour	colour temperature	light current	price
100238	silver coloured	RGB	24 lm	**109,95 €**

CV | 24 Volt | 3,50 W | 2 LED | 120° | 162x99 | 85 | 3 CH | IP65

accessories

872083	power supply | 24V | 40,0 W | IP67	**79,95 €**
843058	RF RGB Controller Set dimmable | 12/24/48V DC	**114,95 €**



With the kind support of Loxone Lichtinstallation Eurotec-Ibiza@fotoeichhorn





YVETTE I

- aluminium diecast
- dimensions L x W x H: 107 x 75 x 64,5 mm

item	colour		colour temperature		light current	price
763005	☐	white	ww	3000 K	108 lm	**79,95 €**
763004	■	anthracite	ww	3000 K	75 lm	**79,95 €**

220-240 Volt | 3,60 W | SMD | 12 LED | Ra>80 | 22° | 105x72 | 57 | IP65





YVETTE II

- aluminium diecast
- dimensions L x W x H: 75 x 105 x 64,5 mm

item	colour		colour temperature		light current	price
763007	☐	white	ww	3000 K	130 lm	**79,95 €**
763006	■	anthracite	ww	3000 K	100 lm	**79,95 €**

220-240 Volt | 3,60 W | SMD | 12 LED | Ra>80 | 54° | 105x72 | 57 | IP65





YVETTE III

- aluminium diecast
- dimensions L x W x H: 250 x 87 x 73 mm

item	colour		colour temperature		light current	price
763012	☐	white	ww	3000 K	335 lm	**139,95 €**
763011	■	anthracite	ww	3000 K	219 lm	**139,95 €**

220-240 Volt | 8,40 W | SMD | 40 LED | Ra>80 | 42° | 243x75 | 65 | IP65



With the kind support of Loxone Lichtinstallation Eurotec-Ibiza@fotoeichhorn

LIGHT BASE II COB OUTDOOR

Recessed wall luminaires in outdoor areas have a slim and elegant appearance and set the scene as light accents for buildings, paths and more. To ensure that the light emission perfectly matches the surroundings, you can choose between four optional cover types and three housing colors each [black, grey, white] for the LIGHT BASE II COB OUTDOOR: stepped, stripe, linear and round. Each shape creates a different light output, allowing for flexible design of outdoor areas.



LIGHT BASE II COB OUTDOOR

- aluminium diecast
- dimensions L x H x W x H: 96 x 96 x 77 mm
- IP65 screwed cable gland
- excl. cover

item	colour	colour temperature	light current	price
763025	grey	ww 3000 K	55 lm	**99,95 €**

220-240 Volt	1 W	COB	1 LED	Ra>80	36°	95x95	70	IP67



With the kind support of Loxone Lichtinstallation Eurotec-Ibiza@fotoeichhorn



cover

930416	cover angular step | white	100 x 100 x 24 mm	**18,95 €**
930417	cover angular step | grey	100 x 100 x 24 mm	**18,95 €**
930418	cover angular step | black	100 x 100 x 24 mm	**18,95 €**
930419	cover angular stripe | white	100 x 100 x 24 mm	**18,95 €**
930414	cover angular stripe | grey	100 x 100 x 24 mm	**18,95 €**
930420	cover angular stripe | black	100 x 100 x 24 mm	**18,95 €**
930421	cover angular linear | white	100 x 100 x 24 mm	**18,95 €**
930422	cover angular linear | grey	100 x 100 x 24 mm	**18,95 €**
930415	cover angular linear | black	100 x 100 x 24 mm	**17,95 €**
930413	cover angular round | white	100 x 100 x 24 mm	**18,95 €**
930423	cover angular round | grey	100 x 100 x 24 mm	**17,95 €**
930424	cover angular round | black	100 x 100 x 24 mm	**18,95 €**

LIGHT BASE III OUTDOOR

Recessed wall luminaires in outdoor areas have a slim and elegant appearance and set the scene as light accents for buildings, paths and more. To ensure that the light emission perfectly matches the surroundings, you can choose between four optional cover types and three housing colours each [black, grey, white] for the LIGHT BASE III OUTDOOR: stepped, stripe, angled and rounded angled. Each shape creates a different light output, allowing for flexible design of outdoor areas.



LIGHT BASE III OUTDOOR


- aluminium diecast
- dimensions L x H x W x H: 245 x 85 x 78 mm
- IP65 screwed cable gland
- excl. cover

item	colour	colour temperature	light current	price
763026	black	ww 3000 K	88 lm	**139,95 €**

220-240 Volt	4 W	SMD	1 LED	Ra>90	115°	245x85	78	IP67



With the kind support of Loxone Lichtinstallation Eurotec-Ibiza@fotoeichhorn

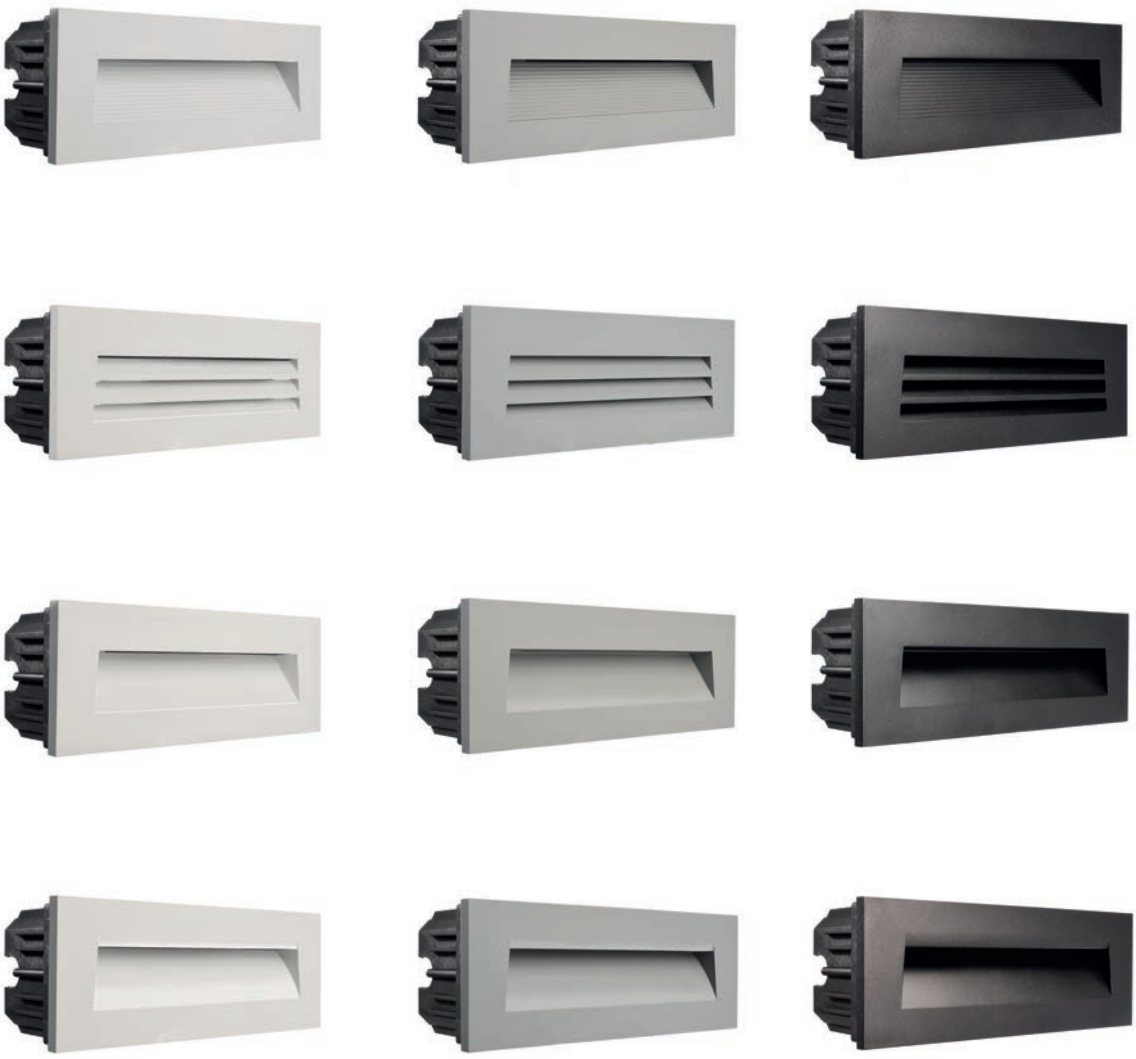

cover

930461	cover step | white	250 x 90 x 24 mm	**62,95 €**
930468	cover step | grey	250 x 90 x 24 mm	**62,95 €**
930469	cover step | black	250 x 90 x 24 mm	**62,95 €**
930470	cover stripe | white	250 x 90 x 24 mm	**62,95 €**
930471	cover stripe | grey	250 x 90 x 24 mm	**62,95 €**
930472	cover stripe | black	250 x 90 x 24 mm	**62,95 €**
930473	cover angled | white	250 x 90 x 24 mm	**62,95 €**
930474	cover angled | grey	250 x 90 x 24 mm	**62,95 €**
930475	cover angled | black	250 x 90 x 24 mm	**62,95 €**
930476	cover rounded | white	250 x 90 x 24 mm	**62,95 €**
930477	cover rounded | grey	250 x 90 x 24 mm	**62,95 €**
930478	cover rounded | black	250 x 90 x 24 mm	**62,95 €**



page 442



page 443



page 443



page 444



page 444



page 445

spherical and floor lamps



SPHERICAL LAMP

- polyethylene [LLDPE]
- dimmable via optional illuminants
- ready to plug in with IP44 safety plug
- incl. ground spike

item	colour	dimensions Ø	power	price
836011	white	300 mm	max. 20 W	**139,95 €**
836930	white	400 mm	max. 42 W	**169,59 €**
836014	white	500 mm	max. 42 W	**199,95 €**
836931	white	600 mm	max. 42 W	**319,95 €**
836958	white	800 mm	max. 42 W	**519,25 €**

220-240 Volt | E27 | LED | IP65/ IP44

suitable illuminants on page 770-773
suitable energy distributors/plug-in socket towers on page 449-453





SPHERICAL LAMP GRANITE + TERRACOTTA

- polyresin
- dimmable via optional illuminants
- ready to plug in with IP44 safety plug
- incl. ground spike

item	colour		dimensions Ø	power	price
836012		granite optic	300 mm	max. 20 W	**139,95 €**
836934		granite optic	400 mm	max. 42 W	**169,59 €**
836015		granite optic	500 mm	max. 42 W	**199,95 €**
836935		granite optic	600 mm	max. 42 W	**319,95 €**
836960		granite optic	800 mm	max. 42 W	**519,25 €**
836013		Terracotta	300 mm	max. 20 W	**139,95 €**
836961		Terracotta	400 mm	max. 42 W	**169,59 €**
836016		Terracotta	500 mm	max. 42 W	**199,95 €**
836962		Terracotta	600 mm	max. 42 W	**319,95 €**
836963		Terracotta	800 mm	max. 42 W	**519,25 €**

220-240 Volt | E27 | LED | IP65/ IP44

suitable illuminants on page 770-773
suitable energy distributors/plug-in socket towers on page 449-453



BOOTIS I + II

- aluminium diecast

item	colour		colour temperature	light current	dimensions L x W x H	socket L x W x H	power	light source	price
733032		anthracite	ww 3000 K	700 lm	150 x 150 x 161 mm	140 x 140 x 20 mm	12 W	12 LED	**94,95 €**
733027		anthracite	ww 3000 K	1100 lm	250 x 250 x 270 mm	240 x 240 x 35 mm	20 W	1 LED	**159,95 €**

100-240 Volt | Ra>80 | 360° | IP65

suitable mounting accessories for outdoor use from page 800

VELORUM

Flexible outdoor luminaires, ready to plug in for any application, that is what the VELORUM series is all about. With its three versions - floor, table and pendant luminaire – it brings a living room atmosphere into your garden. Due to its robust design, it can withstand a lot and is thus the ideal party lighting.



VELORUM

- plastic
- dimensions H x Ø: 510 x 224 mm
- socket H x Ø: 8 x 230 mm
- incl. 3 m connection cable with IP44 connector plug

item	colour	price
836019	anthracite	**169,95 €**

220-240 Volt | 1x max. 18 W | E27 | LED | IP44

suitable illuminants on page 770-771
suitable energy distributors/plug-in socket towers on page 449-453



VELORUM

- plastic
- dimensions H x Ø: 1450 x 345 mm
- socket H x Ø: 10 x 300 mm
- incl. 3 m connection cable with IP44 connector plug

item	colour	price
836018	anthracite	**219,95 €**

220-240 Volt | 1x max. 18 W | E27 | LED | IP44

suitable illuminants on page 770-771
suitable energy distributors/plug-in socket towers on page 449-453



VELORUM

- plastic
- dimensions H x Ø: 254 x 290 mm
- max. suspension: 1,00 m
- incl. 2,5 m connection cable with IP44 connector plug

item	colour	price
836020	anthracite	**139,95 €**

220-240 Volt | 1x max. 18 W | E27 | LED | IP44

suitable illuminants on page 770-771





page 449



page 449



page 450



page 451



page 453

energy distributor



SOCKET TOWER

Sometimes it takes a little more than simply »just« light. With our socket tower, available with and without light, we are closing another gap in our range. Make your garden even more flexible – of course in proven DEKO-LIGHT quality at a fair price.



SOCKET TOWER

- aluminium diecast
- dimensions L x H x Ø: 400 x 100 mm
- incl. 2 outlets [total load max. 3650 W]

item	colour	price
733055	dark grey	**119,95 €**

220-240 Volt | IP44

suitable mounting accessories for outdoor use from page 800



SOCKET TOWER ILLUMINATED

- aluminium diecast
- dimensions L x H x Ø: 478 x 100 mm
- luminaire can be switched separately
- incl. 2 outlets [total load max. 3650 W]

item	colour	colour temperature	light current	price
733054	dark grey	ww 3000 K	150 lm	**179,95 €**

220-240 Volt | 4 W | SMD | 21 LED | Ra>80 | 360° | IP44

suitable mounting accessories for outdoor use from page 800

PUKA MANA + KUKUI PUKA

A garden is pure nature – and yet it needs electricity in many places. With the new PUKA MANA, you can flexibly tap power to operate lawn mowers and other garden tools or simply charge your e-bike or smartphone. The KUKUI PUKA puts the [light] crown on the whole thing and provides thanks to E27-socket for changeable lighting moods. Both models have two socket locations and are particularly easy to install using our multi-outdoor cable connectors. In addition, the well thought-out cable routing ensures a clean look.



PUKA MANA

- aluminium diecast
- dimensions L x W x H : 100 x 100 x 420 mm
- socket L x W: 140 x 140 mm
- incl. 2 outlets [total load max. 3650 W]
- door can be fully closed with angled plug inserted

item	colour	price
733066	dark grey	**209,95 €**

220-240 Volt | IP44

suitable mounting accessories for outdoor use from page 800





KUKUI PUKA

- aluminium diecast
- dimensions L x W x H : 100 x 100 x 620 mm
- socket L x W: 140 x 140 mm
- luminaire can be switched separately
- incl. 2 outlets [total load max. 3650 W]
- door can be fully closed with angled plug inserted

item	colour	colour temperature	price
733067	dark grey	ww	**269,95 €**

220-240 Volt | 1x max. 13 W | E27 | LED | Ra>80 | IP44

suitable illuminants on page 770-771
suitable mounting accessories for outdoor use from page 800





FACADO SOCKET

The floor lamps of the FACADO series have already been used for some time on paved walkways in the garden area. Now the classically elegant outdoor lights become even more versatile: the FACADO SOCKET includes two socket locations and thus also functions as a practical power distributor in the garden, on terraces or on walkways. In addition, thanks to the E27 socket, the light source can be changed and adapted to the desired lighting mood. The FACADO SOCKET is available in two height versions [65 and 100 cm].





FACADO SOCKET

- aluminium diecast
- luminaire can be switched separately
- incl. 2 outlets [total load max. 3650 W]

item	colour		dimensions L x W x H	price
733064	■	anthracite	108 x 108 x 650 mm	**209,95 €**
733065	■	anthracite	108 x 108 x 1000 mm	**229,95 €**

220-240 Volt | 1x max. 20 W | E27 | LED | IP54

suitable illuminants on page 770-771
suitable mounting accessories for outdoor use from page 800



suitable
wall light
page 392
731059



suitable
bollard lights
page 269
730332
733018



page 456



page 457



page 458



page 458



page 459



page 459



page 461



page 461



page 462



page 463



page 464



page 465



page 466



page 466



page 467



page 467

surface mounted / ground spike lights



BERMUDA

Admittedly, a big name for a small luminaire. But in its design, the BERMUDA series is undoubtedly just as exciting as the well-known triangle. The small light dwarf is an enrichment for every garden and fits like a small mushroom into every outdoor environment. And by the way, it also cuts a fine figure as a wall luminaire.





suitable
wall light
IP65
page 418
731124



suitable
bollard light
IP65
page 382
733056



suitable
wall lights
page 170
342159
342160




suitable
table and
floor lights
page 212/213
346018
346017
343029
343028

BERMUDA

- design by Johannes Tomm
- eyecatcher outdoor lighting
- simple mounting
- 360° beam angle
- aluminium diecast
- dimensions H x Ø: 563 x 200 mm
- dimmable via phase control or phase cut-off
- ready to plug in with IP44 safety plug

item	colour		colour temperature		light current	price
733060	☐	white	ww	3000 K	710 lm	**199,95 €**
733059	■	anthracite	ww	3000 K	710 lm	**199,95 €**



suitable energy distributors/plug-in socket towers on page 449-453





LOMI

- aluminium
- dimensions L x Ø: 65 x 100 mm
- dimmable via optional illuminants
- incl. 2 m connection cable with IP44 connector plug
- incl. ground spike

item	colour	price
732126	black	**49,95 €**

220-240 Volt | 1x max. 70 W | GU10 | LED | 200° | | IP65/ IP44

suitable illuminants on page 767
suitable energy distributors/plug-in socket towers on page 449-453





MINI I WW + I AMBER

- aluminium diecast
- dimensions W x H x Ø: 85 x 85 x 42 mm
- socket H x Ø: 10 x 66 mm
- dimmable via optional controller
- incl. 2 m connection cable with WEIPU plug

item	colour		colour temperature		light current	power	Ra	price
131005		silver coloured	WW	3000 K	150 lm	2,60 W	>80	**119,95 €**
732036		black	WW	3000 K	150 lm	3,10 W	>80	**119,95 €**
732037		silver coloured	A	1750 K	57 lm	2,20 W		**119,95 €**
730238		black	A	1700 K	65 lm	2,20 W		**119,95 €**



accessories

862230	power supply | 24V | 12,0 W | IP65	**24,95 €**


suitable Weipu cables/connectors on page 791-793
suitable controllers and dimmers from page 735
additional power supplies from page 698



MINI II CW

- aluminium diecast
- dimensions W x H x Ø: 85 x 85 x 42 mm
- socket Ø: 66 mm
- incl. 2 m connection cable with IP44 connector plug

item	colour		colour temperature		light current	price
131006		silver coloured	CW	6000 K	180 lm	**129,95 €**



suitable energy distributors/plug-in socket towers on page 449-453
suitable mounting accessories for outdoor use from page 800



KEID

- aluminium diecast
- dimensions L x H x Ø: 120 x 211 x 75 mm
- socket H x Ø: 37 x 99 mm

item	colour	colour temperature	light current	power	price
731098	dark grey	ww 3000 K	800 lm	10 W	**149,95 €**
732093	dark grey	ww 3000 K	1350 lm	20 W	**149,95 €**

220-240 Volt | 1 LED | Ra>80 | 45° | 180 ° | IP65

suitable mounting accessories for outdoor use from page 800



KEID II

- aluminium diecast
- dimensions L x H x Ø: 120 x 457 x 75 mm
- incl. IP65 connection box

item	colour	colour temperature	light current	power	price
732094	dark grey	ww 3000 K	800 lm	10 W	**139,95 €**
732095	dark grey	ww 3000 K	1350 lm	20 W	**149,95 €**

220-240 Volt | 1 LED | Ra>80 | 45° | 180 ° | IP65

suitable mounting accessories for outdoor use from page 800



COLT

The new COLT series is a real all-rounder in the outdoor area: powerful, freely rotatable and tiltable and equipped with state-of-the-art LED technology. The surface-mounted luminaires thus provide atmospheric lighting concepts in any outdoor installation and also cut a good figure when switched off with their striking design.

COLT 4W COB



- aluminium diecast
- dimensions L x H x Ø: 65 x 120 x 50 mm
- socket H x Ø: 3 x 65 mm
- incl. 2 m connection cable with IP44 connector plug
- incl. 2 glass panes [transparent, milky]
- incl. 1 honeycomb filter

item	colour	colour temperature	light current	price
732104	anthracite	WW 3000 K	240 lm	**139,95 €**

220-240 Volt | 4 W | COB | 1 LED | Ra>80 | 36° | 180° | IP65/ IP44

accessories

930426	ground spike | L: 170 mm	**9,95 €**
930428	lens 15°	**5,95 €**
930430	lens 60°	**5,95 €**

suitable energy distributors/plug-in socket towers on page 449-453
suitable mounting accessories for outdoor use from page 800

COLT COB RGBW



- aluminium diecast
- dimensions L x Ø: 65 x 50 mm
- socket H x Ø: 7 x 65 mm
- dimmable via optional controller
- incl. 2 m connection cable with WEIPU plug

item	colour	colour temperature	light current	price
732134	anthracite	RGB WW 2700 K	92 lm	**199,95 €**

24 Volt | 3,2 W | 1 LED | Ra>80 | 20° | 45 ° | IP65

accessories

862230	power supply | 24V | 12,0 W | IP65	**24,95 €**


suitable Weipu cables/connectors on page 791-793
suitable controllers and dimmers from page 735
additional power supplies from page 698



COLT 8W COB + 8W RGBW

- aluminium diecast
- dimensions L x H x Ø: 65 x 185 x 76,50 mm
- socket H x Ø: 50 x 95 mm
- incl. 2 glass panes [transparent, milky]
- incl. 1 honeycomb filter [only for 732108]

item	colour	colour temperature	light current	beam angle	Ra	voltage	power	price
732108	anthracite	WW 3000 K	470 lm	40°	>80	220-240V AC	8,00 W	**199,95 €**
732127	anthracite	RGB WW 3000 K	389 lm	20°		24V DC	8,60 W	**299,95 €**
732123	anthracite	RGB CW 5500 K	485 lm	20°		24V DC	8,60 W	**299,95 €**



accessories

930441	housing | H: 41,5 mm	**59,95 €**
930426	ground spike | L: 170 mm	**9,95 €**

suitable mounting accessories for outdoor use from page 800

accessories for **732108**

930431	reflector 12°	**8,95 €**
930432	reflector 22°	**8,95 €**
930587	connection cable 2950 mm with IP44 230V mains plug	**21,95 €**

suitable energy distributors/plug-in socket towers on page 449-453

accessories for **732127**, **732123**

862230	power supply | 24V | 12,0 W | IP65	**24,95 €**
872083	power supply | 24V | 40,0 W | IP67	**79,95 €**


suitable controllers and dimmers from page 735
additional power supplies from page 698



COLT 15W COB + 16W RGBW

- aluminium diecast
- dimensions L x H x Ø: 88 x 220 x 110,50 mm
- socket H x Ø: 56 x 120 mm
- incl. 2 glass panes [transparent, milky]
- incl. 1 honeycomb filter [only for 732109]

item	colour	colour temperature	light current	beam angle	Ra	voltage	power	price
732109	anthracite	WW 3000 K	1090 lm	40°	>80	220-240V AC	15 W	**249,95 €**
732128	anthracite	RGB WW 3000 K	780 lm	20°		24V DC	16 W	**449,95 €**
732124	anthracite	RGB CW 5500 K	950 lm	20°		24V DC	16 W	**449,95 €**



accessories

930442	housing | H: 41,5 mm	**69,95 €**
930427	ground spike | L: 219 mm	**11,95 €**

suitable mounting accessories for outdoor use from page 800

accessories for **732109**

930434	reflector 12°	**10,95 €**
930435	reflector 22°	**11,95 €**
930587	connection cable 2950 mm with IP44 230V mains plug	**21,95 €**

suitable energy distributors/plug-in socket towers on page 449-453

accessories for **732128**, **732124**

872083	power supply | 24V | 40,0 W | IP67	**79,95 €**

suitable controllers and dimmers from page 735
additional power supplies from page 698






COLT 30W COB + 25W RGBW

- aluminium diecast
- dimensions L x H x Ø: 112 x 260 x 131 mm
- socket H x Ø: 56 x 120 mm
- incl. 2 glass panes [transparent, milky]
- incl. 1 honeycomb filter [only for 732110]

item	colour	colour temperature	light current	beam angle	Ra	voltage	power	price
732110	anthracite	WW 3000 K	2320 lm	40°	>80	220-240V AC	30 W	**289,95 €**
732129	anthracite	RGB WW 3000 K	1140 lm	20°		24V DC	25 W	**499,95 €**
732125	anthracite	RGB CW 5500 K	1445 lm	20°		24V DC	25 W	**499,95 €**



accessories

930442	housing | H: 41,5 mm	**69,95 €**
930427	ground spike | L: 219 mm	**11,95 €**

suitable mounting accessories for outdoor use from page 800

accessories for **732110**

930437	reflector 12°	**12,95 €**
930438	reflector 22°	**19,95 €**
930587	connection cable 2950 mm with IP44 230V mains plug	**21,95 €**

suitable energy distributors/plug-in socket towers on page 449-453

accessories for **732129**, **732125**

872083	power supply | 24V | 40,0 W | IP67	**79,95 €**
872094	power supply | 24V | 100,0 W | IP67	**119,95 €**


suitable controllers and dimmers from page 735
additional power supplies from page 698



COLT 65W COB + 36W RGBWW

- aluminium diecast
- dimensions L x H x Ø: 162 x 192 x 182 mm
- socket H x Ø: 65 x 160 mm

item	colour	colour temperature	light current	beam angle	Ra	voltage	power	price
732136	anthracite	WW 3000 K	5260 lm	15°	>90	180-264V AC	65 W	**559,95 €**
732137	anthracite	RGB WW 2700 K	1500 lm	20°	>80	24V DC	30 W	**679,95 €**



accessories for **732136**

930567	reflector 30°	**35,95 €**
930568	reflector 45°	**35,95 €**
930569	reflector 70°	**35,95 €**
930587	connection cable 2950mm with IP44 230V mains plug	**21,95 €**

suitable energy distributors/plug-in socket towers on page 449-453

accessories for **732137**

930558	housing | H: 40,0 mm	**89,95 €**
930427	ground spike | L: 219 mm	**11,95 €**
872083	power supply | 24V | 40,0 W | IP67	**79,95 €**
872094	power supply | 24V | 100,0 W | IP67	**119,95 €**

suitable controllers and dimmers from page 735
additional power supplies from page 698

FLOOD FLEX

The FLOOD FLEX series makes the illumination of surfaces and objects in outdoor areas even more flexible. The highlight: The heads of the compact surface-mounted spotlights can be swiveled sideways as needed, allowing for varying lighting angles without having to realign the spotlights as a whole. While the FLOOD FLEX I is equipped with a centrally arranged luminaire head, the FLOOD FLEX II has two heads arranged next to each other that can be swiveled separately.



FLOOD FLEX I

- aluminium diecast
- dimensions L x W x H: 152,1 x 134,2 x 56 mm
- head can be swivelled sideways
- incl. 2 m connection cable with IP44 connector plug

item	colour	colour temperature	light current	price
732014	dark grey	ww 3000 K	700 lm	**109,95 €**

100-240 Volt	9 W	SMD	8 LED	Ra>80	30°		IP65/ IP44

suitable energy distributors/plug-in socket towers on page 449-453
suitable mounting accessories for outdoor use from page 800



FLOOD FLEX II

- aluminium diecast
- dimensions L x W x H: 200 x 152 x 56 mm
- heads can be individually swivelled sideways
- incl. 2 m connection cable with IP44 connector plug

item	colour	colour temperature	light current	price
732016	dark grey	ww 3000 K	1100 lm	**129,95 €**

100-240 Volt	12 W	SMD	12 LED	Ra>80	25°		IP65/ IP44

suitable energy distributors/plug-in socket towers on page 449-453
suitable mounting accessories for outdoor use from page 800



FLOOD RF II -10 RGB

- plastic
- dimensions L x W x H: 133 x 57 x 179 mm
- incl. 2 m connection cable with IP44 connector plug
- incl. radio remote control with approx. 20 m range

item	colour	colour temperature	light current	price
732074	anthracite	RGB	270 lm	**179,95 €**

200-240 Volt | 10 W | COB | 1 LED | 115° | 3 CH | IP65/ IP44

suitable energy distributors/plug-in socket towers on page 449-453
suitable mounting accessories for outdoor use from page 800



FLOOD RF II -30 RGB + -60 RGB

- plastic
- incl. 2 m connection cable with IP44 connector plug
- incl. radio remote control with approx. 20 m range

item	colour	colour temperature	light current	power	beam angle	dimensions L x W x H	price
732075	anthracite	RGB	1060 lm	30 W	150°	178 x 81 x 215 mm	**289,90 €**
732076	anthracite	RGB	2100 lm	60 W	120°	200 x 98 x 253 mm	**419,95 €**

100-240 Volt | COB | 1 LED | 3 CH | IP65/ IP44

suitable energy distributors/plug-in socket towers on page 449-453
suitable mounting accessories for outdoor use from page 800



page 470



page 470



page 471



page 471

wall washer



CAPH

Despite the linear design, the CAPH wallwasher range is a »round thing«. The wallwashers offer a variety of possibilities to accentuate different objects. Be it the rustic stone wall in warm 3000 K or the modern new building in RGBW. The different optics with symmetrical or asymmetrical beam angles help with positioning.
With the 230 Volt versions, no further accessories are needed. Thanks to the 24 V versions, the CAPH wallwashers can be integrated into all control variants on the market – a »round thing«.



WALL WASHER CAPH SYMMETRIC

- aluminium diecast
- dimensions L x W x H: 1000 x 53,36 x 81,07 mm
- incl. 2 m connection cable with IP44 connector plug

item	colour	colour temperature	light current	price
732079	dark grey	WW 3000 K	3000 lm	**399,95 €**

220-240 Volt | 34,50 W | SMD | 24 LED | Ra>80 | 25° | IP65/ IP44

suitable energy distributors/plug-in socket towers on page 449-453
suitable mounting accessories for outdoor use from page 800



WALL WASHER CAPH SYMMETRIC

- aluminium diecast
- dimensions L x W x H: 1000 x 53,36 x 81,07 mm
- dimmable via optional controller
- incl. 0.5 m connection cable with WEIPU plug
- incl. 0.5 m connection cable with WEIPU plug

item	colour	colour temperature	light current	price
732071	dark grey	RGB WW 3000 K	2800 lm	**399,95 €**

24 Volt | SMD | 60 W | 24 LED | Ra>80 | 25° | 4 CH | IP65

accessories

862164	power supply | 24V DC | 75,0 W | IP20	**82,95 €**
872085	power supply | 24V DC | 75,0 W | IP67	**99,95 €**
843059	RF Color+White Controller Set dimmable | 12/24/48V DC	**119,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698



WALL WASHER CAPH ASYMMETRIC

- aluminium diecast
- dimensions L x W x H: 1000 x 53,36 x 81,07 mm
- incl. 2 m connection cable with IP44 connector plug

item	colour	colour temperature	light current	price
732080	dark grey	WW 3000 K	2580 lm	**399,95 €**

220-240 Volt | 34,50 W | SMD | 24 LED | Ra>80 | 40° / 15° | IP65/ IP44

suitable energy distributors/plug-in socket towers on page 449-453
suitable mounting accessories for outdoor use from page 800



WALL WASHER CAPH ASYMMETRIC

- aluminium diecast
- dimensions L x W x H: 1000 x 53,36 x 81,07 mm
- dimmable via optional controller
- incl. 0.5 m connection cable with WEIPU plug
- incl. 0.5 m connection cable with WEIPU plug

item	colour	colour temperature	light current	price
732072	dark grey	RGB WW 3000 K	2480 lm	**399,95 €**

24 Volt | 60 W | SMD | 24 LED | Ra>80 | 40° / 15° | 4 CH | IP65

accessories

862164	power supply | 24V DC | 75,0 W | IP20	**82,95 €**
872085	power supply | 24V DC | 75,0 W | IP67	**99,95 €**
843059	RF Color+White Controller Set dimmable | 12/24/48V DC	**119,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698



page 476



page 476



page 477



page 478



page 478



page 480




page 481



page 481



page 482



page 483



page 483



page 484



page 484



page 485



page 485



page 486



page 487



page 488



page 488



page 490



page 490



page 491



page 491

ground recessed lights



page 492



page 492



page 493



page 494



page 494



page 495



page 495



page 496



page 496



page 497



page 498



page 499



page 499



page 500



page 500



page 501

ATON, PHAKT UND PAVO

Simple and good – with their robust construction, the ATON, PHAKT and PAVO series provide elegant recessed floor lighting at a low price. The interchangeable light sources allow an individual lighting
solution with vision.





ATON

- stainless steel, aluminium diecast
- dimmable via optional illuminants

item	colour		dimensions H x Ø / L x W	price
730474	silver coloured	round	111 x 97 mm	**49,95 €**
730475	silver coloured	square	111 x 97 x 97 mm	**54,95 €**

220-240 Volt | 1x max. 7 W | GU10 | 70 | 148 | IP67

suitable illuminants on page 767
suitable mounting accessories for outdoor use from page 800





PHAKT

- stainless steel
- dimmable via optional illuminants

item	colour		dimensions H x Ø / L x W	price
730476	silver coloured	round	156 x 136 mm	**61,95 €**
730477	silver coloured	square	156 x 136 x 136 mm	**64,95 €**

220-240 Volt | 1x max. 9 W | E27 | 109 | 192 | IP67

suitable illuminants on page 770-771
suitable mounting accessories for outdoor use from page 800






PAVO

- stainless steel, aluminium diecast
- swivelling insert
- dimmable via optional illuminants

item	colour		dimensions H x Ø / L x W	price
730478	silver coloured	round	156 x 139 mm	**96,95 €**
730479	silver coloured	square	156 x 139 x 139 mm	**109,95 €**



suitable illuminants on page 767
suitable mounting accessories for outdoor use from page 800







BASIC I WW

- stainless steel / aluminium diecast
- dimmable via optional controller
- incl. 0.5 m connection cable with WEIPU plug

item	colour		colour temperature		light current		dimensions H x Ø / L x W	price
730339	☐	silver coloured	ww	3000 K	15 lm	round	65 x 45 mm	**69,95 €**
730340	☐	silver coloured	ww	3000 K	14 lm	square	65 x 45 x 45 mm	**69,95 €**

CV | 24 Volt | 0,60 W | SMD | 1 LED | Ra>80 | 60° | 42 | 83 | IP67

accessories

862230	power supply | 24V DC | 12,0 W | IP65	**24,95 €**
872083	power supply | 24V | 40,0 W | IP67	**79,95 €**
843056	RF Single Controller Set dimmable | 12/24/48V DC	**104,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698



ALZIRR II

- stainless steel / aluminium diecast
- dimensions H x Ø: 82,50 x 55 mm
- dimmable via optional controller
- incl. 1 m connection cable with WEIPU plug

item	colour		colour temperature		light current	price
730470	☐	silver coloured	ww	3000 K	150 lm	**89,95 €**

CV | 24 Volt | 2,40 W | 1 LED | Ra>80 | 30° | 48 | 97,25 | IP67

accessories

862230	power supply | 24V DC | 12,0 W | IP65	**24,95 €**
872083	power supply | 24V | 40,0 W | IP67	**79,95 €**
843056	RF Single Controller Set dimmable | 12/24/48V DC	**104,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698


CHWITZER´S
HOTEL AM PARK



FORNAC

- stainless steel / aluminium diecast
- dimensions H x Ø: 80 x 55 mm
- asymmetric
- dimmable via optional controller
- incl. 1 m connection cable with WEIPU plug [male]


item	colour	colour temperature	light current	price
730447	silver coloured	WW 3000 K	110 lm	**119,95 €**

CV	24 Volt	2,70 W	1 LED	Ra>80	45°/35°	48	97,25	IP67	

accessories

862230	power supply | 24V DC | 12,0 W | IP65	**24,95 €**
872083	power supply | 24V | 40,0 W | IP67	**79,95 €**
843056	RF Single Controller Set dimmable | 12/24/48V DC	**104,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698

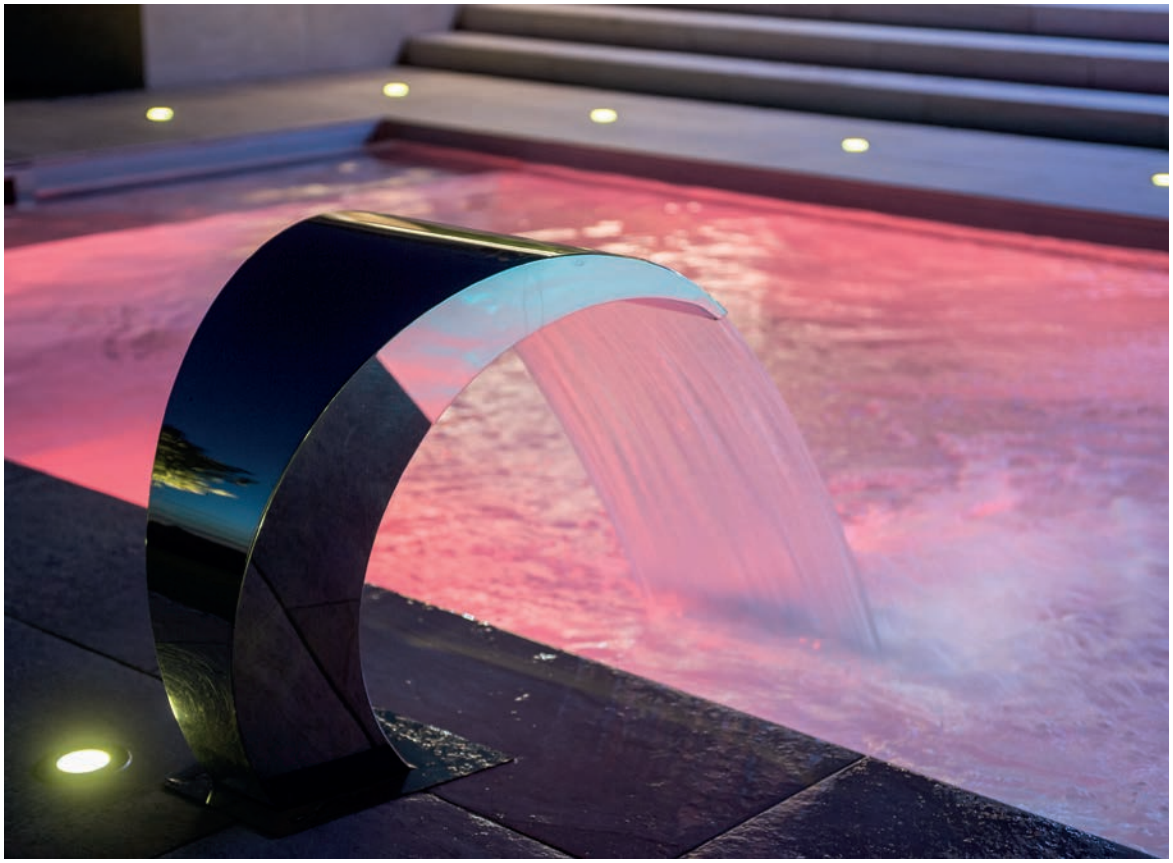

With the kind support of Licht von Klein / www.licht-von-klein.de





NC COB I

- aluminium diecast
- incl. 0,5 m connection cable with protected junction box

item	colour		colour temperature		light current		dimensions H x Ø / L x W	price
730439	■	black	ww	3000 K	520 lm	round	90 x 63 mm	**179,95 €**
730438	■	black	ww	3000 K	520 lm	square	90 x 63 x 63 mm	**179,95 €**

220-240 Volt | 5 W | COB | 1 LED | Ra>80 | 24° | 68,8 | 150 | IP67

suitable mounting accessories for outdoor use from page 800





EASY COB III WW

- stainless steel / aluminium diecast
- dimensions H x Ø: 96 x 70 mm
- dimmable via optional controller
- incl. 1 m connection cable with WEIPU plug

item	colour		colour temperature		light current		dimensions H x Ø / L x W	price
730469	□	silver coloured	ww	3000 K	330 lm	round	96 x 70 mm	**149,95 €**
730468	□	silver coloured	ww	3000 K	330 lm	square	96 x 70 x 70 mm	**149,95 €**

24 Volt | 5,50 W | COB | 1 LED | Ra>80 | 25° | 53 | 132,5 | IP67

accessories

862230	power supply | 24V DC | 12,0 W | IP65	**24,95 €**
872083	power supply | 24V | 40,0 W | IP67	**79,95 €**
843056	RF Single Controller Set dimmable | 12/24/48V DC	**104,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698



PEACOCK

- stainless steel / aluminium diecast
- dimensions H x Ø: 43 x 58 mm
- incl. 0,5 m connection cable with protected junction box


item	colour	colour temperature	light current	price
730459	silver coloured	WW 3000 K	150 lm	**109,95 €**

220-240 Volt	2 W	COB	1 LED	Ra>80	30°	44	48	IP67

suitable mounting accessories for outdoor use from page 800



With the kind support of Albtherme Waldbronn / Ziegler Technics

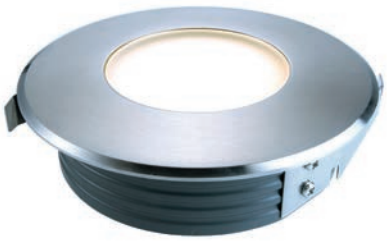

FLAT III WW

- stainless steel / aluminium diecast
- dimensions H x Ø: 42 x 116 mm
- incl. 0,5 m connection cable

item	colour	colour temperature	light current	price
730336	silver coloured	WW 3000 K	25 lm	**149,95 €**

220-240 Volt | 0,72 W | 12 LED | 120° | 100 | 42 | IP67

suitable mounting accessories for outdoor use from page 800



FLAT II

- stainless steel / aluminium diecast
- dimensions H x Ø: 42 x 116 mm
- incl. 0,5 m connection cable

item	colour	colour temperature	light current	price
100111	silver coloured	WW 3000 K	400 lm	**189,95 €**
100112	silver coloured	CW 6000 K	450 lm	**189,95 €**

220-240 Volt | 5 W | 3 LED | Ra>80 | 20° | 105 | 42 | IP67

suitable mounting accessories for outdoor use from page 800



FLAT I WW

- stainless steel / aluminium diecast
- dimensions H x Ø: 38 x 173 mm
- incl. 0,5 m connection cable

item	colour	colour temperature	light current	price
100114	silver coloured	WW 3000 K	860 lm	**249,95 €**

220-240 Volt | 11 W | 6 LED | Ra>80 | 20° | 150 | 50 | IP67

suitable mounting accessories for outdoor use from page 800



FLAT I RGB

- stainless steel / aluminium diecast
- dimensions H x Ø: 38 x 173 mm
- dimmable via optional controller
- incl. 0.5 m connection cable with WEIPU plug

item	colour	colour temperature	light current	price
100116	silver coloured	RGB	510 lm	**289,95 €**

CV | 24 Volt | 17 W | SMD | 6 LED | 30° | 150 | 50 | IP67

accessories

872083	power supply | 24V | 40,0 W | IP67	**79,95 €**
843058	RF RGB Controller Set dimmable | 12/24/48V DC	**114,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698



GROUND RECESSED LIGHT II WW

- stainless steel / aluminium diecast
- dimensions H x Ø: 102 x 116 mm
- incl. 0,5 m connection cable

item	colour	colour temperature	light current	price
730255	silver coloured	WW 3000 K	280 lm	**169,95 €**

220-240 Volt | 3 W | 3 LED | Ra>80 | 30° | 102 | 150 | IP67

suitable mounting accessories for outdoor use from page 800



GROUND RECESSED LIGHT I WW

- stainless steel / aluminium diecast
- dimensions H x Ø: 102 x 116 mm
- dimmable via optional controller
- incl. 1 m connection cable with WEIPU plug

item	colour	colour temperature	light current	price
100133	silver coloured	WW 3000 K	720 lm	**169,95 €**

CV | 24 Volt | 5,80 W | 3 LED | Ra>80 | 45° | 102 | 150 | IP67

accessories

862230	power supply | 24V DC | 12,0 W | IP65	**24,95 €**
872083	power supply | 24V | 40,0 W | IP67	**79,95 €**
843056	RF Single Controller Set dimmable | 12/24/48V DC	**104,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698



TALL COB I WW

- stainless steel / aluminium diecast
- dimensions H x Ø: 102 x 116 mm
- incl. 0,5 m connection cable

item	colour	colour temperature	light current	price
730211	silver coloured	WW 3000 K	720 lm	**179,95 €**

220-240 Volt	6 W	COB	1 LED	Ra>80	25°	102	150	IP67	

suitable mounting accessories for outdoor use from page 800



With the kind support of Licht von Klein / www.licht-von-klein.de



HP I WW + II WW

- stainless steel / aluminium diecast
- dimensions H x Ø: 111 x 173 mm
- incl. 0,5 m connection cable

item	colour	colour temperature	light current	power		price
730249	silver coloured	WW 3000 K	540 lm	6 W	walkable	**219,95 €**
730250	silver coloured	WW 3000 K	920 lm	10 W	passable	**239,95 €**



suitable mounting accessories for outdoor use from page 800





GROUND RECESSED LIGHT

- stainless steel / aluminium diecast
- dimensions H x Ø: 111 x 173 mm
- asymmetric
- incl. 0,5 m connection cable

item	colour	colour temperature	light current	price
730289	silver coloured	WW 3000 K	700 lm	**249,95 €**

220-240 Volt | 10 W | 6 LED | Ra>80 | 45°/35° | 157 | 150 | IP67

suitable mounting accessories for outdoor use from page 800



HP IV WW

- stainless steel / aluminium diecast
- dimensions H x Ø: 111 x 173 mm
- asymmetric
- dimmable via optional controller
- incl. 0.5 m connection cable with WEIPU plug

item	colour	colour temperature	light current	price
730296	silver coloured	WW 3000 K	800 lm	**249,95 €**

CV | 24 Volt | 14 W | 6 LED | Ra>80 | 45°/35° | 157 | 150 | IP67

accessories

872083	power supply | 24V | 40,0 W | IP67	**79,95 €**
843056	RF Single Controller Set dimmable | 12/24/48V DC	**104,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698





COB 12 SOFT WW

- stainless steel / aluminium diecast
- dimensions L x Ø: 128 x 173 mm
- incl. 0,5 m connection cable
- incl. honeycomb filter

item	colour	colour temperature	light current	price
730420	silver coloured brushed	WW 3000 K	900 lm	**419,95 €**

220-240 Volt | 12 W | COB | 1 LED | Ra>80 | 30° | 155 | 220 | IP67

suitable mounting accessories for outdoor use from page 800



COB 25 SOFT WW

- stainless steel / aluminium diecast
- dimensions L x Ø: 190 x 250 mm
- incl. 0,5 m connection cable
- incl. honeycomb filter

item	colour	colour temperature	light current	price
730421	silver coloured brushed	WW 3000 K	1650 lm	**579,95 €**

220-240 Volt | 25 W | COB | 1 LED | Ra>80 | 35° | 222 | 220 | IP67

suitable mounting accessories for outdoor use from page 800





SOFT FLEX 7

- stainless steel / aluminium diecast
- dimensions H x Ø: 128 x 173 mm
- radiation direction adjustable
- incl. 1 m connection cable
- incl. honeycomb filter

item	colour	colour temperature	light current	price
730267	silver coloured	WW 3000 K	480 lm	**349,95 €**

220-240 Volt | 7,20 W | 6 LED | Ra>80 | 17° | 60° | 155 | 220 | IP67

suitable mounting accessories for outdoor use from page 800





SOFT FLEX 18

- stainless steel / aluminium diecast
- dimensions L x Ø: 190 x 250 mm
- incl. 1 m connection cable
- incl. honeycomb filter

item	colour	colour temperature	light current	price
730266	silver coloured	WW 3000 K	770 lm	**599,95 €**

220-240 Volt | 18 W | 12 LED | Ra>80 | 26° | 60° | 222 | 220 | IP67

suitable mounting accessories for outdoor use from page 800



SQUARE COB I WW

- stainless steel / aluminium diecast
- dimensions L x W x H: 125 x 125 x 75 mm
- incl. 0,5 m connection cable

item	colour	colour temperature	light current	price
730209	silver coloured	WW 3000 K	700 lm	**169,95 €**

220-240 Volt	6 W	COB	1 LED	Ra>80	25°	114x114	95	IP67	

suitable mounting accessories for outdoor use from page 800



SQUARE II WW

- stainless steel / aluminium diecast
- dimensions L x W x H: 125 x 125 x 75 mm
- incl. 0,5 m connection cable
- incl. 2 glass panes [Prisma, white]

item	colour	colour temperature	light current	price
730248	silver coloured	WW 3000 K	160 lm	**179,95 €**

220-240 Volt	2,20 W	SMD	36 LED	Ra>80	120°	114x114	95	IP67	

suitable mounting accessories for outdoor use from page 800



SQUARE I WWA

- stainless steel / aluminium diecast
- asymmetric
- dimensions L x W x H: 160 x 160 x 79 mm
- incl. 0,5 m connection cable

item	colour	colour temperature	light current	price
730199	silver coloured	WW 3000 K	400 lm	**249,95 €**

220-240 Volt | 6 W | 6 LED | Ra>80 | 45°/35° | 152x152 | 112 | IP67

suitable mounting accessories for outdoor use from page 800





EASY SQUARE II RGB

- stainless steel / aluminium diecast
- dimensions L x W x H: 55 x 55 x 99 mm
- dimmable via optional controller
- incl. 0.5 m connection cable with WEIPU plug

item	colour	colour temperature	light current	price
730244	silver coloured	RGB	80 lm	**179,95 €**

CV | 24 Volt | 3,50 W | 1 LED | 30° | 48 | 132 | IP67

accessories

872083	power supply | 24V | 40,0 W | IP67	**79,95 €**
843058	RF RGB Controller Set dimmable | 12/24/48V DC	**114,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698



GROUND RECESSED LIGHT III RGB

- stainless steel / aluminium diecast
- dimensions H x Ø: 102 x 116 mm
- dimmable via optional controller
- incl. 0.5 m connection cable with WEIPU plug

item	colour	colour temperature	light current	price
730276	silver coloured	RGB	280 lm	**179,95 €**

CV | 24 Volt | 7,40 W | SMD | 3 LED | 30° | 102 | 150 | IP67

accessories

872083	power supply | 24V | 40,0 W | IP67	**79,95 €**
843058	RF RGB Controller Set dimmable | 12/24/48V DC	**114,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698



HOROLOGII

- stainless steel / aluminium diecast
- dimensions H x Ø: 79 x 116 mm
- dimmable via optional controller
- incl. 0.5 m connection cable with WEIPU plug [male]

item	colour	colour temperature	light current	price
730449	silver coloured	RGB CW 5700-7000 K	257 lm	**199,95 €**

CV | 24 Volt | 7,90 W | 1 LED | 20° | 102 | 150 | IP67

accessories

872083	power supply | 24V | 40,0 W | IP67	**79,95 €**
843059	RF RGB+White Controller Set dimmable | 12/24/48V DC	**119,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698



CANUM

- stainless steel / aluminium diecast
- dimensions H x Ø: 111 x 173 mm
- dimmable via optional controller
- incl. 0.5 m connection cable with WEIPU plug

item	colour	colour temperature	light current	price
730454	silver coloured	RGB	510 lm	**349,95 €**

CV | 24 Volt | 16,9 W | 6 LED | 50°/35° | 157 | 150 | IP67

accessories

872083	power supply | 24V | 40,0 W | IP67	**79,95 €**
843058	RF RGB Controller Set dimmable | 12/24/48V DC	**114,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698



HELIOS I

- aluminium diecast
- dimensions H x Ø: 54 x 210 mm
- socket H x Ø: 25 x 165 mm
- incl. 4 heavy duty anchor

item	colour	colour temperature	light current	price
732143	anthracite	WW 3000 K	34 lm	**119,95 €**

220-240 Volt | 1 W | 1 LED | Ra>80 | 1x 60° | IP67

suitable mounting accessories for outdoor use from page 800



HELIOS II

- aluminium diecast
- dimensions H x Ø: 50 x 210 mm
- socket H x Ø: 7 x 198 mm
- incl. 4 heavy duty anchor

item	colour	colour temperature	light current	price
732049	anthracite	WW 3000 K	65 lm	**119,95 €**

220-240 Volt | 2 W | 2 LED | Ra>80 | 2x 60° | IP67

suitable mounting accessories for outdoor use from page 800




HELIOS IV


- aluminium diecast
- dimensions H x Ø: 50 x 210 mm
- socket H x Ø: 7 x 198 mm
- incl. 4 heavy duty anchor

item	colour	colour temperature	light current	price
732050	anthracite	ww 3000 K	150 lm	**119,95 €**

220-240 Volt | 4 W | 4 LED | Ra>80 | 4x 60° | IP67

suitable mounting accessories for outdoor use from page 800

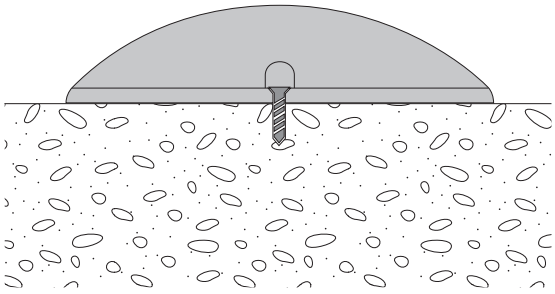

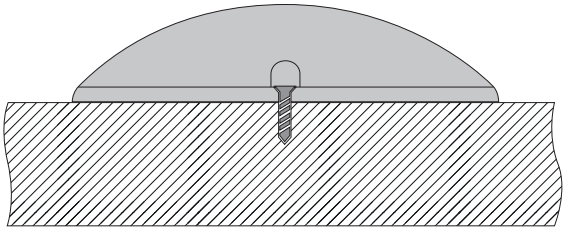





LINE IV 1.9WW + 3.7WW

- stainless steel / aluminium diecast
- incl. 1 m connection cable

item	colour	colour temp.	light current	dimensions L x W x H	cutout L x W	power	light source	price
100108	silver coloured	WW 3000 K	35 lm	195 x 63 x 65 mm	180 x 58 mm	1,90 W	10 LED	**159,95 €**
100109	silver coloured	WW 3000 K	85 lm	328 x 63 x 65 mm	313 x 58 mm	6,00 W	20 LED	**219,95 €**

220-240 Volt | SMD | Ra>80 | 120° | 90 | IP67

suitable mounting accessories for outdoor use from page 800



With the kind support of Licht von Klein / www.licht-von-klein.de





LINE I WW + II WW

- stainless steel / aluminium diecast
- asymmetric light distribution
- incl. 0,5 m connection cable

item	colour	colour temp.	light current	dimensions L x W x H	cutout L x W	power	light source	price
730292	silver coloured	WW 3000 K	340 lm	195 x 63 x 65 mm	180 x 58 mm	4,50 W	3 LED	**179,95 €**
730262	silver coloured	WW 3000 K	730 lm	328 x 63 x 65 mm	313 x 58 mm	10,00 W	6 LED	**249,95 €**

220-240 Volt | Ra>80 | 45°/35° | 90 | IP67

suitable mounting accessories for outdoor use from page 800



LINE V WW + VI WW

- stainless steel / aluminium diecast
- incl. 0,5 m connection cable

item	colour	colour temp.	light current	dimensions L x W x H	cutout L x W	power	light source	price
730434	silver coloured	WW 3000 K	1100 lm	549 x 68 x 31.5 mm	524 x 58 mm	16,00 W	12 LED	**369,95 €**
730432	silver coloured	WW 3000 K	2300 lm	1025 x 68 x 80 mm	1004 x 58 mm	34,00 W	24 LED	**599,95 €**

220-240 Volt | SMD | Ra>80 | 20° | 80 | IP67

suitable mounting accessories for outdoor use from page 800

LINE II WWA



- stainless steel / aluminium diecast
- dimensions L x W x H: 328 x 63 x 65 mm
- asymmetric light distribution
- dimmable via optional controller
- incl. 0.5 m connection cable with WEIPU plug

item	colour	colour temp.	light current	price
730008	silver coloured	WW 3000 K	750 lm	**249,95 €**

CV | 24 Volt | 12,20 W | 6 LED | Ra>80 | 45°/35° | 313x58 | 90 | IP67

accessories

872083	power supply | 24V | 40,0 W | IP67	**79,95 €**
843056	RF Single Controller Set dimmable | 12/24/48V DC	**104,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698

LINE III RGB



- stainless steel / aluminium diecast
- dimensions L x W x H: 328 x 63 x 65 mm
- dimmable via optional controller
- incl. 0.5 m connection cable with WEIPU plug

item	colour	colour temp.	light current	price
730263	silver coloured	RGB	400 lm	**299,95 €**

CV | 24 Volt | 16,50 W | SMD | 6 LED | 35° | 313x58 | 90 | IP67

accessories

872083	power supply | 24V | 40,0 W | IP67	**79,95 €**
843058	RF RGB Controller Set dimmable | 12/24/48V DC	**114,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698



LINE V RGB + VI RGB

- stainless steel / aluminium diecast
- dimmable via optional controller
- incl. 0.5 m connection cable with WEIPU plug

item	colour	colour temp.	light current	dimensions L x W x H	cutout L x W	power	light source	price
730437	silver coloured	RGB	340 lm	549 x 68 x 32,5 mm	524 x 58 mm	18,00 W	12 LED	**419,95 €**
730436	silver coloured	RGB	700 lm	1025 x 68 x 31,5 mm	1004 x 58 mm	42,80 W	24 LED	**679,95 €**

CV | 24 Volt | 30° | 80 | IP67

accessories

843058	RF RGB Controller Set dimmable | 12/24/48V DC	**114,95 €**

accessories for **730437**

872083	power supply | 24V | 40,0 W | IP67	**79,95 €**


accessories for **730436**

872085	power supply | 24V | 75,0 W | IP67	**99,95 €**
872094	power supply | 24V | 100,0 W | IP67	**119,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698



page 504



page 505



page 505



page 506



page 507

underwater lights



SNAPPER II WW

- stainless steel
- dimensions H x Ø: 73 x 68,5 mm
- dimmable via optional controller
- incl. 10 m connection cable with WEIPU plug IP67


item	colour		colour temperature		light current	price
740007		silver coloured	WW	3000 K	105 lm	**159,95 €**

CV | 24 Volt | 3 W | 1 LED | Ra>80 | 45°/35° | 59 | 135 | IP68

accessories

872045	LED safety transformer dimmable | 24V DC | 60,0 W	**329,95 €**
843056	RF Single Controller Set dimmable | 12/24/48V DC	**104,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698

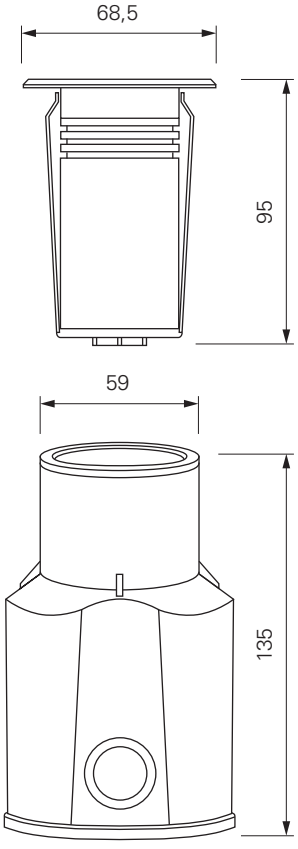

SHARK I WW



- stainless steel
- dimensions H x Ø: 33 x 115 mm
- dimmable via optional controller
- incl. 10 m connection cable with WEIPU plug IP67

item	colour	colour temperature	light current	price
785016	silver coloured	WW 3000 K	770 lm	**279,95 €**


CV | 24 Volt | 11,80 W | 6 LED | Ra>80 | 30° | IP68

accessories

872045	LED safety transformer dimmable | 24V DC | 60,0 W	**329,95 €**
872046	LED safety transformer dimmable | 24V DC | 150,0 W	**449,95 €**
843056	RF Single Controller Set dimmable | 12/24/48V DC	**104,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698

SHARK I RGB



- stainless steel
- dimensions H x Ø: 33 x 115 mm
- dimmable via optional controller
- incl. 10 m connection cable with WEIPU plug IP67

item	colour	colour temperature	light current	price
785017	silver coloured	RGB	400 lm	**309,95 €**

CV | 24 Volt | 15 W | 6 LED | 30° | 3 CH | IP68

accessories

872045	LED safety transformer dimmable | 24V DC | 60,00W	**329,95 €**
872046	LED safety transformer dimmable | 24V DC | 150,00 W	**449,95 €**
843058	RF RGB Controller Set dimmable | 12/24/48V DC	**114,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698

FIARA



- stainless steel
- dimensions L x W x H x Ø: 95 x 106 x 150 x 95 mm
- socket L x W x H: 65 x 40 x 60 mm
- dimmable via optional controller
- incl. 10 m connection cable with WEIPU plug IP67


item	colour		colour temperature	light current	price
740005		silver coloured	WW 3000 K	670 lm	**349,95 €**

CV | 24 Volt | 10 W | COB | 1 LED | Ra>80 | 25° | | 180° | IP68

accessories

872045	LED safety transformer dimmable | 24V DC | 60,0 W	**329,95 €**
872046	LED safety transformer dimmable | 24V DC | 150,0 W	**449,95 €**
843056	RF Single Controller Set dimmable | 12/24/48V DC	**104,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698

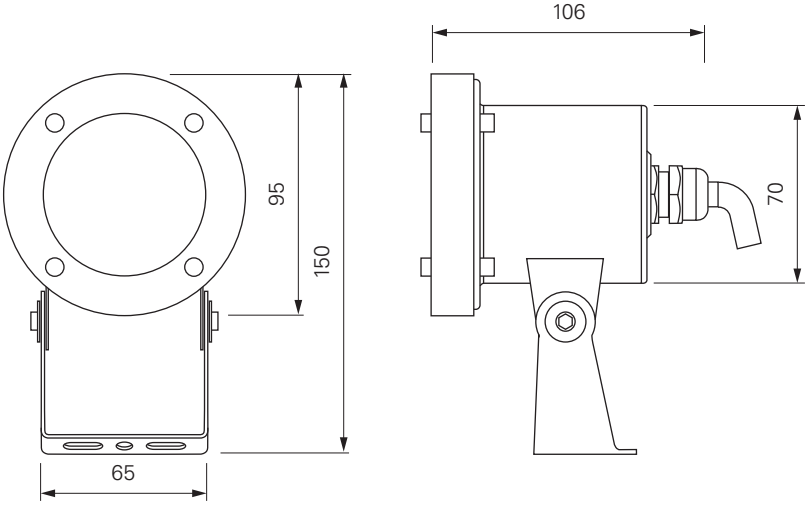



FIARA

- stainless steel
- dimensions L x W x H x Ø: 127 x 120 x 195 x 127 mm
- socket L x W x H: 93 x 50 x 80 mm
- dimmable via optional controller
- incl. 10 m connection cable with WEIPU plug IP67


item	colour	colour temperature	light current	price
740006	silver coloured	WW 3000 K	1200 lm	**389,95 €**

CV | 24 Volt | 18,50 W | COB | 1 LED | Ra>80 | 22° | | 180° | IP68

accessories

872045	LED safety transformer dimmable | 24V DC | 60,0 W	**329,95 €**
872046	LED safety transformer dimmable | 24V DC | 150,0 W	**449,95 €**
843056	RF Single Controller Set dimmable | 12/24/48V DC	**104,95 €**

suitable Weipu cables/connectors on page 791-793
additional controller and dimmer from page 735
additional power supplies from page 698

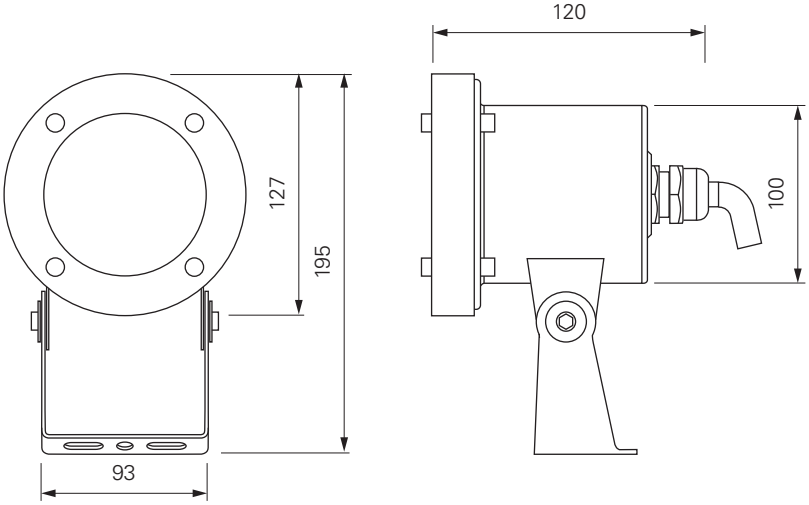



page 510



page 511



page 512



page 514

floodlight









suitable power luminaires page 321
707130
707138-707033


FLOOD SMD 15 + 30 + 50

- aluminium diecast, glass
- incl. 1,2 m connection cable mit IP44 plug

item	colour	colour temp.	light current	dimensions L x W x H	socket L x W	power	light source	price
732147	silver	WW 3000 K	1800 lm	170 x 144 x 27 mm	179 x 20 mm	15 W	36 LED	**89,95 €**
732149	silver	NW 4000 K	1950 lm	170 x 144 x 27 mm	179 x 20 mm	15 W	36 LED	**89,95 €**
732148	black	WW 3000 K	1325 lm	170 x 144 x 27 mm	179 x 20 mm	15 W	36 LED	**89,95 €**
732150	silver	WW 3000 K	3600 lm	230 x 192,5 x 40,5 mm	237 x 25 mm	30 W	72 LED	**129,95 €**
732152	silver	NW 4000 K	3900 lm	230 x 192,5 x 40,5 mm	237 x 25 mm	30 W	72 LED	**129,95 €**
732151	black	WW 3000 K	3600 lm	230 x 192,5 x 40,5 mm	237 x 25 mm	30 W	72 LED	**129,95 €**
732153	silver	WW 3000 K	4130 lm	290 x 244 x 40,5 mm	302 x 30 mm	50 W	108 LED	**179,95 €**
732155	silver	NW 4000 K	4190 lm	290 x 244 x 40,5 mm	302 x 30 mm	50 W	108 LED	**179,95 €**
732154	black	WW 3000 K	4130 lm	290 x 244 x 40,5 mm	302 x 30 mm	50 W	108 LED	**179,95 €**



suitable mounting accessories for outdoor use from page 800
suitable energy distributors/plug-in socket towers on page 449-453

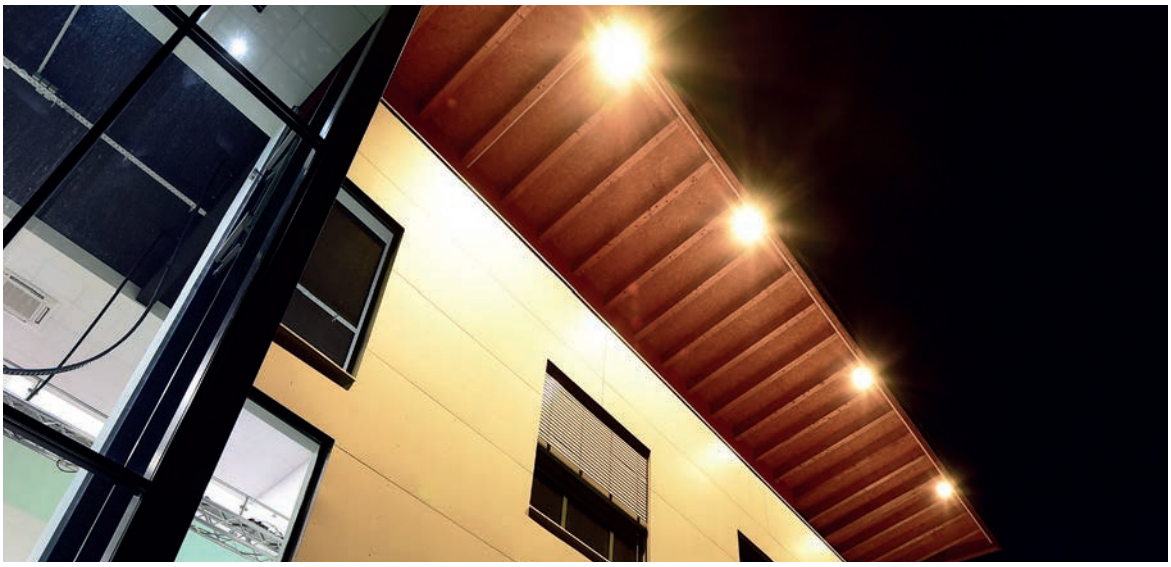



FLOOD COB 30/50/80 AMBER

- aluminium diecast / plastic
- incl. 1m connection cable with IP44 connector plug


item	colour	colour temperature	light current	dimensions L x W x H	power	price
730464	anthracite	A 1700 K	710 lm	178 x 81 x 215 mm	30 W	**229,95 €**
730465	anthracite	A 1700 K	1255 lm	200 x 98 x 253 mm	50 W	**339,95 €**
730466	anthracite	A 1700 K	1285 lm	291 x 250 x 116 mm	80 W	**449,95 €**




suitable mounting accessories for outdoor use from page 800
suitable energy distributors/plug-in socket towers on page 449-453

accessories for 730464


930659 wall bracket / display arm | black **52,95 €**



light distribution curve



light distribution curve



light distribution curve




BRACHIUM


- aluminium diecast
- dimensions L x W x H: 316 x 286 x 41mm
- socket L x W x H: 327 x 28 x 160 mm
- incl. 2 m connection cable with IP44 connector plug

item	colour		colour temperature		light current	price
732064	■	black	WW	3000 K	8100 lm	**259,95 €**
732105	■	black	NW	4000 K	8400 lm	**259,95 €**


220-240 Volt | 80 W | SMD | 144 LED | Ra>80 | 75° | 180 ° | IP65/ IP44 | IK08

suitable mounting accessories for outdoor use from page 800
suitable energy distributors/plug-in socket towers on page 449-453

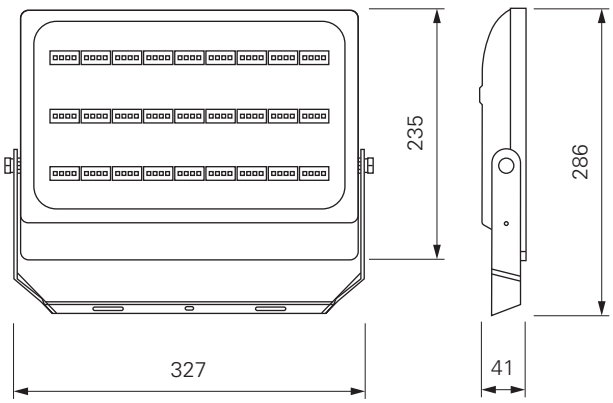



light distribution curve 732064



light distribution curve 732105



ATIK

The surface-mounted luminaires of the ATIK series are real power packs and deliver up to 40,000 lumens of light current in the light colours warm white, neutral white and cool white. Thanks to their especially flat construction, the ATIK spotlights can be installed in almost any location. The floodlights become even more flexible with the separately available anti-dazzle device and the optional protective front grid.






ATIK

- aluminium diecast
- dimensions L x W x H: 319 x 90 x 411 mm
- incl. 2 m connection cable with IP44 connector plug

item	colour	colour temperature	light current	power	light source	price
732041	black	WW 3000 K	17500 lm	150 W	418 LED	**399,95 €**
732096	black	NW 4000 K	21350 lm	150 W	418 LED	**399,95 €**
732099	black	CW 5000 K	20500 lm	150 W	418 LED	**399,95 €**
732043	black	WW 3000 K	24200 lm	200 W	320 LED	**519,95 €**
732097	black	NW 4000 K	28450 lm	200 W	320 LED	**519,95 €**
732100	black	CW 5000 K	27400 lm	200 W	320 LED	**499,95 €**
732045	black	WW 3000 K	26900 lm	240 W	320 LED	**579,95 €**
732098	black	NW 4000 K	31800 lm	240 W	320 LED	**579,95 €**
732101	black	CW 5000 K	31050 lm	240 W	320 LED	**579,95 €**
732102	black	NW 4000 K	39900 lm	300 W	416 LED	**679,95 €**
732103	black	CW 5000 K	39900 lm	300 W	416 LED	**679,95 €**







accessories


930410	anti-dazzle device | black | 122 mm	**29,95 €**
930411	protective grid metal | black | 57 mm	**17,95 €**

suitable mounting accessories for outdoor use from page 800
suitable energy distributors/plug-in socket towers on page 449-453

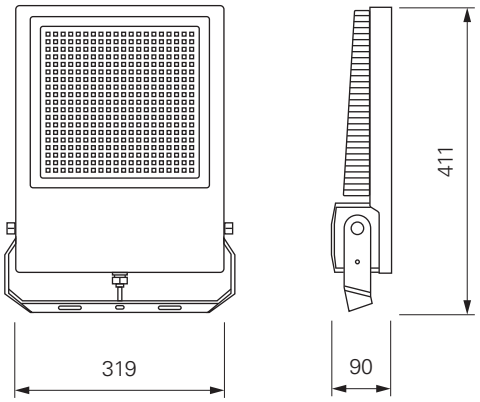





light distribution curve 732041




light distribution curve 732096




light distribution curve 732099




light distribution curve 732043




light distribution curve 732097




light distribution curve 732100




light distribution curve 732045




light distribution curve 732098



light distribution curve 732101



light distribution curve 732102



light distribution curve 732103



page 518



page 519



page 519

display lights




ATIS II




- aluminium diecast
- dimensions L x W: 526 x 144 mm
- socket H x Ø: 40 x 95 mm
- dimmable via phase control or phase cut-off
- rotating and swivelling luminaire head

item	colour		colour temperature		light current	price
688020	☐	white	ww	3000 K	1120 lm	**219,95 €**
688021	■	anthracite	ww	3000 K	1120 lm	**219,95 €**





light distribution curve 688020



light distribution curve 688021






KEID


- aluminium diecast
- dimensions L x H x Ø: 120 x 580 x 75 mm
- socket H x Ø: 37 x 99 mm
- rotating and swivelling luminaire head

item	colour		colour temperature		light current	power	price
688019		dark grey	ww	3000 K	800 lm	10 W	**169,95 €**
688024		dark grey	ww	3000 K	1350 lm	20 W	**179,95 €**





light distribution curve 688019




light distribution curve 688024




MOBBY II

- aluminium diecast
- dimensions L x H x Ø: 680 x 100 x 84 mm
- socket H x Ø: 34 x 95 mm
- dimmable via phase control or phase cut-off
- rotating and swivelling luminaire head

item	colour		colour temperature		light current	price
688008		anthracite	ww	3000 K	810 lm	**199,95 €**





light distribution curve



ALUMINIUM PROFILES

522 linear light in 5 steps
524 aluminium profiles | overview
527 assembly for profiles and stripes
528 homogeneous light image
532 U-profiles | flat + high | built-in/built-on
544 T-profiles | flat + high | built-in
556 H- und groove-profiles
566 step/plinth/angle/corner-profiles | built-in/built-on
592 dry construction profiles
602 tile profiles
618 profiles for outdoor use | walkable/trafficable

LINEAR LIGHT IN 5 STEPS

STEP BY STEP TO BECOMING A LINEAR LIGHT PROFESSIONAL!
It has never been quicker and easier to put together an individually and perfectly coordinated linear light in max. 5 steps. Test how quickly and easily you can put your personal project into practice.

1

CHOOSE YOUR PROFILE
Whether for indoor or outdoor use, for wide or narrow LED stripes, whether the profile is to be should be low or high. Matching to this you can choose between different shapes and light transmittance of the covers.

2

CHOOSE THE RIGHT LED STRIPE
You can choose between strips for indoor or outdoor use, with one or more light colours, high-power strips for basic lighting or fewer lumens for ambient lighting. Various cut sizes and LED spacing also perfectly round off our range here.



3

SELECT THE REQUIRED POWER SUPPLY
In addition to the various protection classes for the respective place of use and voltages, you can choose from different designs and power classes. Our range is complemented by power supplies that can be dimmed directly or controlled via Dali, KNX or 1-10V.

4

DO YOU NEED A CONTROLLER TO STEER?
In this category, you can select the appropriate control controller or LED dimmer according to requirements and customer wishes. Whether control via radio, smartphone, DMX, Dali, etc. – almost no [control] wishes remain unfulfilled!



5

ACCESSORIES, MOUNTING MATERIAL & CO
In the last step, you will find everything that makes installation easier, faster and more comfortable and gives the linear desired light a perfect finish.




U-profiles
flat
from page 532




U-profiles
high
from page 532



T-profiles
flat
from page 544




T-profiles
high
from page 544



H-Profil
high
page 556




groove-profile
U-profile
page 558




groove-profile
T-profile
page 560




groove-profile
U-profile
page 562




step-profile
built-on
page 566



step-profile
built-on
page 568




angle-profile
angle 45°
page 570



angle-profile
angle 135°
page 572



built-on-Profil
built-on | substructure
page 576



corner-profile
built-on
page 578




corner-profile
built-on
from page 580




socket-profile
built-on
page 574



corner-profile
built-on | built-in
page 582




corner-profiles
built-on
from page 584




corner-profile
built-on
page 588


aluminium profiles




dry construction profile
wall cove
page 592




dry construction profile
wall, ceiling
page 594




dry construction profile
ceiling cove
page 596




dry construction profile
wall, ceiling
page 598




tile profiles
built-in | closing
from page 602



tile profile
closing
page 606




tile profiles
inside corner
from page 608




tile profiles
outside corner
from page 612




profile for outdoor
built-in | built-on
page 618




profile for outdoor
built-in
page 620



profile for outdoor
built-in | built-on
page 622



profile for outdoor
built-in
page 624



profiles for outdoor
built-in | passable
page 626

ASSEMBLY FOR PROFILES & STRIPES

We provide our products individually made to measure on request.
You will receive the prices on request.

989100 – **service package I** – profile cut
profile is shortened to desired length, tolerance ± 1 mm | sawing loss 4 mm

989105 – **drill hole end cap / profile**
hole for cable outlet in end cap or profile

989200 – **service package II** – cover cut
cover is shortened to desired length, tolerance ± 1 mm | sawing loss 4 mm

989300 – **service package III** – stripe cut
LED stripe is adapted to desired length, taking into account segment and maximum total length, including soldering of a cable lead of the desired length and open, tinned wire ends

989305 – **cable** – connecting cable / cores 1 channel
989310 – **cable** – connecting cable / cores 2 channel
989315 – **cable** – connecting cable / cores 3 + 4 channel
989320 – **cable** – mini cable / cores 1 - 4 channel
989325 – **cable** – connecting cable / cores 5 channel

989301 – **2nd connecting cable**
attachment of a 2nd connecting cable / cores for further connection with open tinned wire ends

989302 – **connecting cable**
attaching / soldering a fixed connection line / cores between 2 stripe pieces
[max. 1m connection line / cores incl., a longer connection will be charged by the metre]
original length and max. total length of the strip to be operated may not be exceeded by sections be exceeded

989350 – **IP surcharge** – sealing stripe
sealing a shortened IP stripe / gluing an end cap


989400 – **service package IV** – complete assembly
bringing together and assembling all components into a finished luminaire
incl. function test and cable flag
[for desired length, please add 2cm to the cut length of the LED stripe segment for connection space, length tolerance +/- 2mm]



HOMOGENEOUS LIGHT IMAGE

How to achieve a homogeneous light image
In combination with a milky 40% cover and a matching LED stripe, a homogeneous light image can be created. The distance [pixel pitch] between the LEDs and the cover is decisive.

The rule of thumb here is:
The distance between the LEDs should be smaller than the distance between the LEDs and the cover.

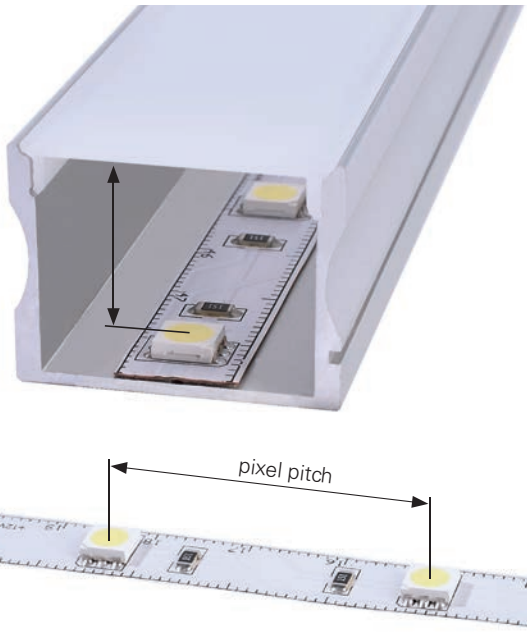

PROFILE DESCRIPTION

mounting type: A = built-on
E = built-in

Width of the series [10 profile] / of the matching LED stripe

AU - 01 - 10

basic form

series

TRANSLUCENCY / LIGHT TRANSMISSION

95% clear | 75% mat | 40% milky


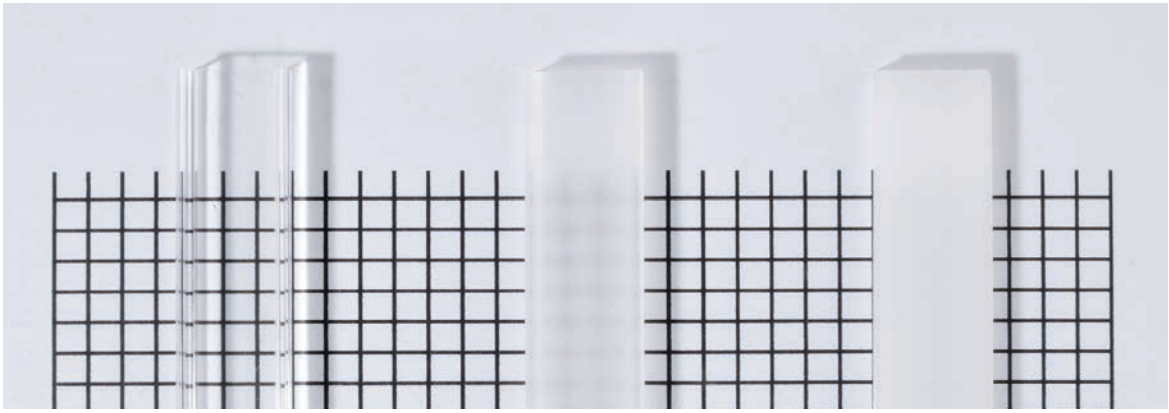


Illustration of various LED stripes with different pixel pitches in combination with three different light transmittances in the covers. This small selection clearly illustrates the optical differences of some LED stripes in combination with different covers.


120 LED/m
cutting option 50 mm / 6 LED



240 LED/m
cutting option 25 mm / 6 LED

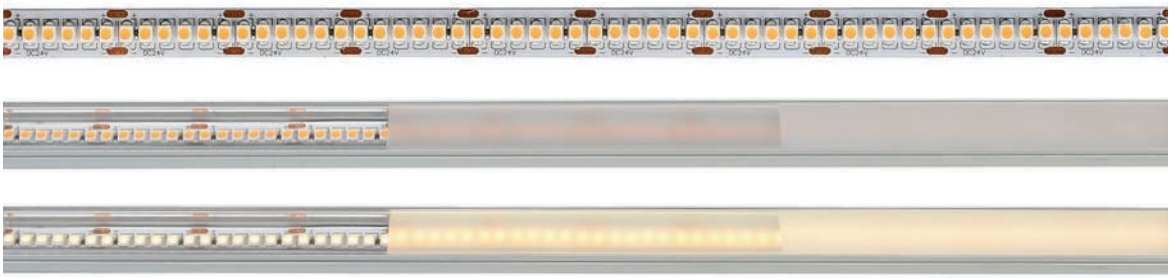

700LED/m
cutting option 10 mm / 7 LED

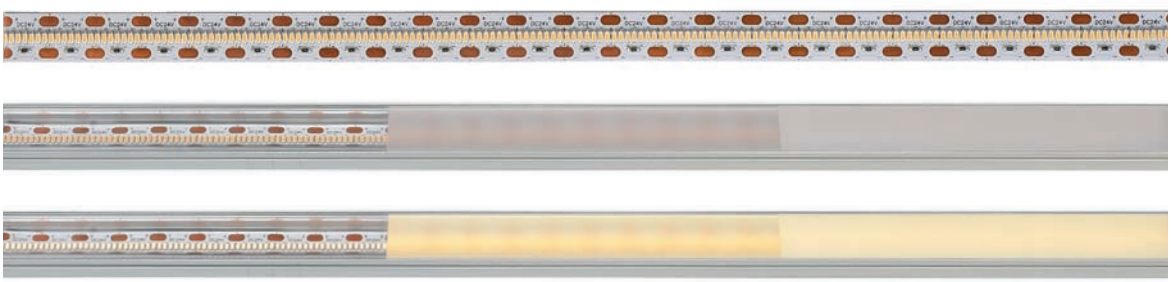

COB 480 LED/m
cutting option 50 mm / 24 LED





With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg




U- and T-profiles

The profiles of these series are available in various designs. Thanks to their universal profile shape, they can be used flexibly in almost all areas. Thanks to their profile construction, they are ideally suited for the cover cut edges.


AU-01-05
flat U-profile | 5 mm
for LED stripes up to 5,7 mm width

item	colour	dimensions L	price
970080	aluminium anodized	1m	**7,95 €**
970081	aluminium anodized	2m	**17,95 €**
970083	black	2m	**15,95 €**
970085	white	2m	**15,95 €**











AU-02-05
high U-profile | 5 mm
for LED stripes up to 5,7 mm width

item	colour	dimensions L	price
970180	aluminium anodized	1m	**9,95 €**
970181	aluminium anodized	2m	**18,95 €**
970183	black	2m	**18,95 €**
970185	white	2m	**18,95 €**















covers | PMMA [polymethylmethacrylat]
for 5 mm profiles

	clear	mat	milky	
				
1m	**983550**		**983554**	**5,95 €**
2m	**983551**		**983555**	**11,95 €**
3m			**983556**	**18,95€**
				
1m			**984054**	**5,95 €**
2m			**984055**	**11,95 €**
				
1m			**984554**	**5,95 €**
2m			**984555**	**11,95 €**

end caps set | 2 pieces **4,95 €**
for 5 mm profiles

					
☐	white	**978660**		**978670**	
▒	grey	**978661**		**978671**	
■	black	**978662**		**978672**	
					
☐	white	**979160**		**979170**	
▒	grey	**979161**		**979171**	
■	black	**979162**		**979172**	
					
☐	white	**979660**		**979670**	
▒	grey	**979661**		**979671**	
■	black	**979662**		**979672**	


930345 3M double-sided tape | 50 m x 8 mm **19,95 €**





AU-01-08
flat U-profile | 8 mm
for LED stripes up to 9,3 mm width

item	colour	dimensions L	price
970000	aluminium anodized	1m	**11,95 €**
970001	aluminium anodized	2m	**23,95 €**
970008	aluminium anodized	3m	**35,95 €**
970003	black	2m	**23,95 €**
970005	white	2m	**23,95 €**
970007	aluminium brushed	2m	**23,95 €**












AU-02-08
high U-profile | 8 mm
for LED stripes up to 9,3 mm width

item	colour	dimensions L	price
970100	aluminium anodized	1m	**14,95 €**
970101	aluminium anodized	2m	**28,95 €**
970108	aluminium anodized	3m	**42,95 €**
970103	black	2m	**28,95 €**
970105	white	2m	**28,95 €**
















covers | PMMA [polymethylmethacrylat]
for 8 mm profiles

end caps set | 2 pieces **4,95 €**
for 8 mm profiles

	clear	mat	milky						
									
1m	**983000**	**983002**	**983004**	**7,95 €**	white	**978000**		**978040**	
2m	**983001**	**983003**	**983005**	**17,95 €**	grey	**978001**		**978041**	
3m	**983006**	**983007**	**983008**	**25,95 €**	black	**978002**		**978042**	
									
1m	**983500**	**983502**	**983504**	**7,95 €**	white	**978500**		**978540**	
2m	**983501**	**983503**	**983505**	**17,95 €**	grey	**978501**		**978541**	
3m			**983506**	**25,95 €**	black	**978502**		**978542**	
									
1m		**984002**	**984004**	**7,95 €**	white	**979080**		**979100**	
2m		**984003**	**984005**	**17,95 €**	grey	**979081**		**979101**	
					black	**979082**		**979102**	
									
1m		**984502**	**984504**	**7,95 €**	white	**979580**		**979600**	
2m		**984503**	**984505**	**17,95 €**	grey	**979581**		**979601**	
					black	**979582**		**979602**	


987002 fixation clamp 08 | set consisting of 2 pieces **3,95 €**



987080 universal mounting clip brackets [pivotable] set, 2 pieces | matching fixation clamp must be ordered separately **23,95 €**




930347 3M double-sided tape | 50 m x 12 mm **23,95 €**





AU-01-10
flat U-profile | 10 mm
for LED stripes up to 11,3 mm width

item	colour	dimensions L	price
970020	aluminium anodized	1m	**11,95 €**
970021	aluminium anodized	2m	**23,95 €**
970028	aluminium anodized	3m	**35,95 €**
970029	aluminium anodized	4m	**49,95 €**
970023	black	2m	**23,95 €**
970025	white	2m	**23,95 €**
970027	aluminium brushed	2m	**23,95 €**








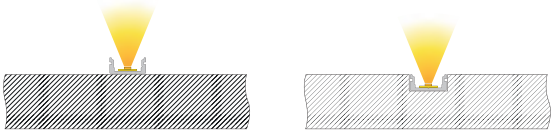



AU-02-10
high U-profile | 10 mm
for LED stripes up to 11,3 mm width

item	colour	dimensions L	price
970120	aluminium anodized	1m	**14,95 €**
970121	aluminium anodized	2m	**28,95 €**
970128	aluminium anodized	3m	**44,95 €**
970129	aluminium elovxiert	4m	**59,95 €**
970123	black	2m	**28,95 €**
970125	white	2m	**28,95 €**
















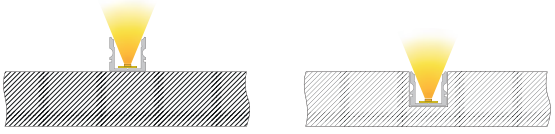

covers | PMMA [polymethylmethacrylat]
for 10 mm profiles

	clear	mat	milky	
				
1m	**983010**	**983012**	**983014**	**7,95 €**
2m	**983011**	**983013**	**983015**	**17,95 €**
3m	**983016**	**983017**	**983018**	**25,95 €**
4m	**983060**	**983061**	**983062**	**33,95 €**
				
1m	**983510**	**983512**	**983514**	**7,95 €**
2m	**983511**	**983513**	**983515**	**17,95 €**
3m	**983516**	**983517**	**983518**	**25,95 €**
4m	**983560**	**983561**	**983562**	**33,95 €**
				
1m		**984012**	**984014**	**7,95 €**
2m		**984013**	**984015**	**17,95 €**
3m		**984017**	**984018**	**25,95 €**
4m		**984010**	**984011**	**33,95 €**
				
1m		**984512**	**984514**	**7,95 €**
2m		**984513**	**984515**	**17,95 €**
3m		**984517**	**984518**	**25,95 €**
4m		**984510**	**984511**	**33,95 €**
				
1m	**985010**			**7,95 €**
2m	**985011**			**17,95 €**
3m	**985016**			**25,95 €**

end caps set | 2 pieces **4,95 €**
for 10 mm profiles

			
white	**978010**		**978050**
grey	**978011**		**978051**
black	**978012**		**978052**
			
white	**978510**		**978550**
grey	**978511**		**978551**
black	**978512**		**978552**
			
white	**979000**		**979020**
grey	**979001**		**979021**
black	**979002**		**979022**
			
white	**979500**		**979520**
grey	**979501**		**979521**
black	**979502**		**979522**
			
white	**980000**		**980010**
grey	**980001**		**980011**
black	**980002**		**980012**


987004 fixation clamp 10 | set consisting of 2 pieces **3,95 €**



987080 universal mounting clip brackets [pivotable] set, 2 pieces | matching fixation clamp must be ordered separately **23,95 €**




930348 3M double-sided tape | 50 m x 15 mm **26,95 €**





AU-01-12
flat U-profile | 12 mm
for LED stripes up to 13,3 mm width

item	colour	dimensions L	price
970040	aluminium anodized	1m	**14,95 €**
970041	aluminium anodized	2m	**28,95 €**
970048	aluminium anodized	3m	**42,95 €**
970043	black	2m	**28,95 €**
970045	white	2m	**28,95 €**
970047	aluminium brushed	2m	**28,95 €**












AU-02-12
high U-profile | 12 mm
for LED stripes up to 13,3 mm width

item	colour	dimensions L	price
970140	aluminium anodized	1m	**15,95 €**
970141	aluminium anodized	2m	**31,95 €**
970148	aluminium anodized	3m	**44,95 €**
970143	black	2m	**31,95 €**
970145	white	2m	**31,95 €**
970147	aluminium brushed	2m	**31,95 €**

















covers | PMMA [polymethylmethacrylat]
for 12 mm profiles

end caps set | 2 pieces **4,95 €**
for 12 mm profiles

	clear	mat	milky						
									
1m	**983020**	**983022**	**983024**	**7,95 €**	white	**978020**		**978060**	
2m	**983021**	**983023**	**983025**	**17,95 €**	grey	**978021**		**978061**	
3m	**983028**	**983027**	**983026**	**25,95 €**	black	**978022**		**978062**	
									
1m	**983520**	**983522**	**983524**	**7,95 €**	white	**978520**		**978560**	
2m	**983521**	**983523**	**983525**	**17,95 €**	grey	**978521**		**978561**	
3m	**983527**		**983526**	**25,95 €**	black	**978522**		**978562**	
									
1m		**984022**	**984024**	**7,95 €**	white	**979010**		**979030**	
2m		**984023**	**984025**	**17,95 €**	grey	**979011**		**979031**	
3m			**984026**	**25,95 €**	black	**979012**		**979032**	
									
1m		**984522**	**984524**	**7,95 €**	white	**979510**		**979530**	
2m		**984523**	**984525**	**17,95 €**	grey	**979511**		**979531**	
3m			**984526**	**25,95 €**	black	**979512**		**979532**	


987006 fixation clamp 12 | set consisting of 2 pieces **3,95 €**



987080 universal mounting clip brackets [pivotable] set, 2 pieces | matching fixation clamp must be ordered separately **23,95 €**




930348 3M double-sided tape | 50 m x 15 mm **26,95 €**





AU-01-15
flat U-profile | 15 mm
for LED stripes up to 16,3 mm width

item	colour	dimensions L	price
970060	aluminium anodized	1m	**14,95 €**
970061	aluminium anodized	2m	**28,95 €**
970068	aluminium anodized	3m	**42,95 €**
970063	black	2m	**28,95 €**
970065	white	2m	**28,95 €**












AU-02-15
high U-profile | 15 mm
for LED stripes up to 16,3 mm width

item	colour	dimensions L	price
970160	aluminium anodized	1m	**15,95 €**
970161	aluminium anodized	2m	**31,95 €**
970168	aluminium anodized	3m	**44,95 €**
970163	black	2m	**31,95 €**
970165	white	2m	**31,95 €**















covers | PMMA [polymethylmethacrylat]
for 15 mm profiles

end caps set | 2 pieces **4,95 €**
for 15 mm profiles

	clear	mat	milky							
										
1m	**983030**	**983032**	**983034**	**9,95 €**	white	**978030**		**978070**		
2m	**983031**	**983033**	**983035**	**19,95 €**	grey	**978031**		**978071**		
3m	**983038**	**983037**	**983036**	**28,95 €**	black	**978032**		**978072**		
										
1m	**983530**	**983532**	**983534**	**9,95 €**	white	**978530**		**978570**		
2m	**983531**	**983533**	**983535**	**19,95 €**	grey	**978531**		**978571**		
3m		**983539**	**983536**	**28,95 €**	black	**978532**		**978572**		
										
1m		**984032**	**984034**	**9,95 €**	white	**979090**		**979110**		
2m		**984033**	**984035**	**19,95 €**	grey	**979091**		**979111**		
3m			**984036**	**28,95 €**	black	**979092**		**979112**		
										
1m		**984532**	**984534**	**9,95 €**	white	**979590**		**979610**		
2m		**984533**	**984535**	**19,95 €**	grey	**979591**		**979611**		
					black	**979592**		**979612**		


987008 fixation clamp 15 | set consisting of 2 pieces **3,95 €**



987080 universal mounting clip brackets [pivotable] set, 2 pieces | matching fixation clamp must be ordered separately **23,95 €**



930349 3M double-sided tape | 50 m x 20 mm **34,95 €**





AU-02-20

high U-profile | 20 mm
for LED stripes up to 21,3 mm width

item	colour	dimensions L	price
970201	aluminium anodized	2m	**37,95 €**
970202	aluminium anodized	3m	**59,95 €**





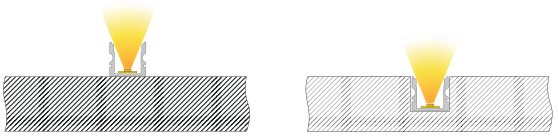






With the kind support of Friese Elektrotechnik, Ettenheim


covers | PMMA [polymethylmethacrylat]
for 20 mm profiles

	clear	mat	milky	
				
1m	**983040**		**983044**	**11,50 €**
2m	**983041**		**983045**	**21,95 €**
3m			**983046**	**32,95 €**
1m			**984044**	**11,50 €**
2m			**984045**	**21,95 €**
				
1m			**984544**	**11,50 €**
2m			**984545**	**21,95 €**


end caps set | 2 pieces **4,95 €**
for 20 mm profiles

	grey	**978161**
	grey	**978351**
	grey	**978361**

987010	fixation clamp 20 | set consisting of 2 pieces	**3,95 €**
987080	universal mounting clip brackets [pivotable] set, 2 pieces | matching fixation clamp must be ordered separately	**23,95 €**
930350	3M double-sided tape | 50 m x 25 mm	**42,95 €**








ET-01-05


flat built-in-T-profile | 5 mm
for LED stripes up to 5,7 mm width

item	colour	dimensions L	price
975081	aluminium anodized	2m	**17,95 €**
975083	black	2m	**17,95 €**
975085	white	2m	**17,95 €**







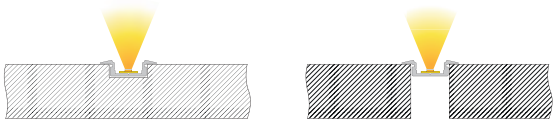


ET-02-05


high built-in-T-profile | 5 mm
for LED stripes up to 5,7 mm width

item	colour	dimensions L	price
975181	aluminium anodized	2m	**19,95 €**
975183	black	2m	**19,95 €**
975185	white	2m	**19,95 €**
















covers | PMMA [polymethylmethacrylat]
for 5 mm profiles

	clear	mat	milky	
				
1m	**983550**		**983554**	**5,95 €**
2m	**983551**		**983555**	**11,95 €**
3m			**983556**	**18,95€**
				
1m			**984054**	**5,95 €**
2m			**984055**	**11,95 €**
				
1m			**984554**	**5,95 €**
2m			**984555**	**11,95 €**

end caps set | 2 pieces **4,95 €**
for 5 mm profiles

				
☐	white	**978680**		**978690**
▒	grey	**978681**		**978691**
■	black	**978682**		**978692**
				
☐	white	**979180**		**979190**
▒	grey	**979181**		**979191**
■	black	**979182**		**979192**
				
☐	white	**979680**		**979690**
▒	grey	**979681**		**979691**
■	black	**979682**		**979692**

930345 3M double-sided tape | 50 m x 8 mm **19,95 €**





ET-01-08


flat built-in-T-profile | 8 mm
for LED stripes up to 9,3 mm width

item	colour	dimensions L	price
975001	aluminium anodized	2m	**26,95 €**
975008	aluminium anodized	3m	**38,95 €**
975003	black	2m	**26,95 €**
975005	white	2m	**26,95 €**







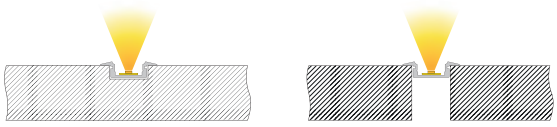



ET-02-08


high built-in-T-profile | 8 mm
for LED stripes up to 9,3 mm width

item	colour	dimensions L	price
975101	aluminium anodized	2m	**31,95 €**
975108	aluminium anodized	3m	**44,95 €**
975103	black	2m	**31,95 €**
975105	white	2m	**31,95 €**

















covers | PMMA [polymethylmethacrylat]
for 8 mm profiles

	clear	mat	milky	
				
1m	**983000**	**983002**	**983004**	**7,95 €**
2m	**983001**	**983003**	**983005**	**17,95 €**
3m	**983006**	**983007**	**983008**	**25,95 €**
				
1m	**983500**	**983502**	**983504**	**7,95 €**
2m	**983501**	**983503**	**983505**	**17,95 €**
3m			**983506**	**25,95 €**
				
1m		**984002**	**984004**	**7,95 €**
2m		**984003**	**984005**	**17,95 €**
				
1m		**984502**	**984504**	**7,95 €**
2m		**984503**	**984505**	**17,95 €**

end caps set | 2 pieces **4,95 €**
for 8 mm profiles

			
white	**978080**		**978120**
grey	**978081**		**978121**
black	**978082**		**978122**
			
white	**978580**		**978620**
grey	**978581**		**978621**
black	**978582**		**978622**
			
white	**979120**		**979140**
grey	**979121**		**979141**
black	**979122**		**979142**
			
white	**979620**		**979640**
grey	**979621**		**979641**
black	**979622**		**979642**


987002 fixation clamp 08 | set consisting of 2 pieces **3,95 €**



987080 universal mounting clip brackets [pivotable] set, 2 pieces | matching fixation clamp must be ordered separately **23,95 €**



930347 3M double-sided tape | 50 m x 12 mm **23,95 €**




ET-01-10


flat built-in-T-profile | 10 mm
for LED stripes up to 11,3 mm width

item	colour	dimensions L	price
975021	aluminium anodized	2m	**26,95 €**
975028	aluminium anodized	3m	**38,95 €**
975029	aluminium anodized	4m	**53,95 €**
975023	black	2m	**26,95 €**
975025	white	2m	**26,95 €**








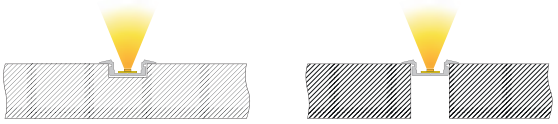



ET-02-10


high built-in-T-profile | 10 mm
for LED stripes up to 11,3 mm width

item	colour	dimensions L	price
975121	aluminium anodized	2m	**31,95 €**
975128	aluminium anodized	3m	**44,95 €**
975129	aluminium anodized	4m	**64,95 €**
975123	black	2m	**31,95 €**
975125	white	2m	**31,95 €**

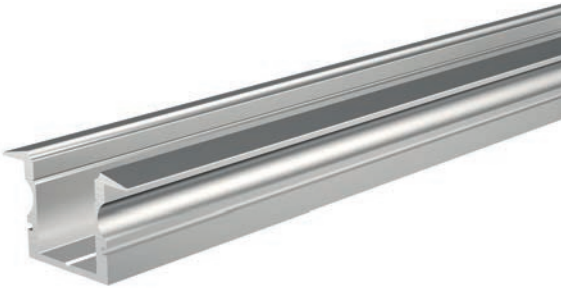

















covers | PMMA [polymethylmethacrylat] for 10 mm profiles

end caps set | 2 pieces **4,95 €**
for 10 mm profiles

	clear	mat	milky						
							  		
1m	**983010**	**983012**	**983014**	**7,95 €**	☐	white	**978090**		**978130**
2m	**983011**	**983013**	**983015**	**17,95 €**	▒	grey	**978091**		**978131**
3m	**983016**	**983017**	**983018**	**25,95 €**	■	black	**978092**		**978132**
4m	**983060**	**983061**	**983062**	**33,95 €**					
							  		
1m	**983510**	**983512**	**983514**	**7,95 €**	☐	white	**978590**		**978630**
2m	**983511**	**983513**	**983515**	**17,95 €**	▒	grey	**978591**		**978631**
3m	**983516**	**983517**	**983518**	**25,95 €**	■	black	**978592**		**978632**
4m	**983560**	**983561**	**983562**	**33,95 €**					
							  		
1m		**984012**	**984014**	**7,95 €**	☐	white	**979040**		**979060**
2m		**984013**	**984015**	**17,95 €**	▒	grey	**979041**		**979061**
3m		**984017**	**984018**	**25,95 €**	■	black	**979042**		**979062**
4m		**984010**	**984011**	**33,95 €**					
							  		
1m		**984512**	**984514**	**7,95 €**	☐	white	**979540**		**979560**
2m		**984513**	**984515**	**17,95 €**	▒	grey	**979541**		**979561**
3m		**984517**	**984518**	**25,95 €**	■	black	**979542**		**979562**
4m		**984510**	**984511**	**33,95 €**					
							  		
1m	**985010**			**7,95 €**	☐	white	**980040**		**980060**
2m	**985011**			**17,95 €**	▒	grey	**980041**		**980061**
3m	**985016**			**25,95 €**	■	black	**980042**		**980062**


987004 fixation clamp 10 | set consisting of 2 pieces **3,95 €**



987080 universal mounting clip brackets [pivotable] set, 2 pieces | matching fixation clamp must be ordered separately **23,95 €**




930348 3M double-sided tape | 50 m x 15 mm **26,95 €**




ET-01-12


flat built-in-T-profile | 12 mm
for LED stripes up to 13,3 mm width

item	colour	dimensions L	price
975041	aluminium anodized	2m	**31,95 €**
975043	black	2m	**31,95 €**
975045	white	2m	**31,95 €**

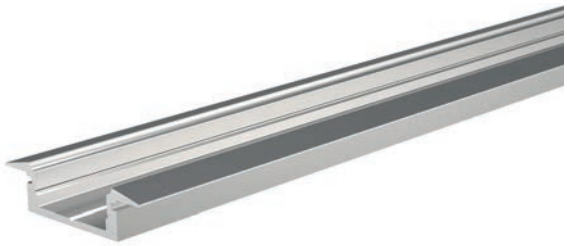










ET-02-12

high built-in-T-profile | 12 mm
for LED stripes up to 13,3 mm width

item	colour	dimensions L	price
975141	aluminium anodized	2m	**35,95 €**
975148	aluminium anodized	3m	**54,95 €**
975143	black	2m	**35,95 €**
975145	white	2m	**35,95 €**

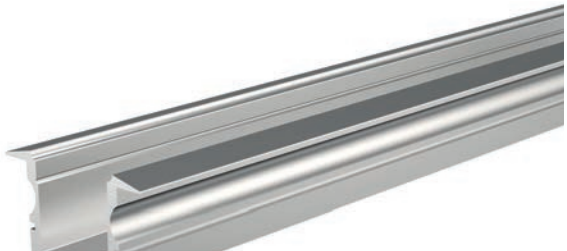












covers | PMMA [polymethylmethacrylat]
for 12 mm profiles

end caps set | 2 pieces **4,95 €**
for 12 mm profiles

	clear	mat	milky					
						 		
1m	**983020**	**983022**	**983024**	**7,95 €**	white	**978100**	**978140**	
2m	**983021**	**983023**	**983025**	**17,95 €**	grey	**978101**	**978141**	
3m	**983028**	**983027**	**983026**	**25,95 €**	black	**978102**	**978142**	
						 		
1m	**983520**	**983522**	**983524**	**7,95 €**	white	**978600**	**978640**	
2m	**983521**	**983523**	**983525**	**17,95 €**	grey	**978601**	**978641**	
3m	**983527**		**983526**	**25,95 €**	black	**978602**	**978642**	
						 		
1m		**984022**	**984024**	**7,95 €**	white	**979050**	**979070**	
2m		**984023**	**984025**	**17,95 €**	grey	**979051**	**979071**	
3m			**984026**	**25,95 €**	black	**979052**	**979072**	
						 		
1m		**984522**	**984524**	**7,95 €**	white	**979550**	**979570**	
2m		**984523**	**984525**	**17,95 €**	grey	**979551**	**979571**	
3m			**984526**	**25,95 €**	black	**979552**	**979572**	

987006 fixation clamp 12 | set consisting of 2 pieces **3,95 €**



987080 universal mounting clip brackets [pivotable] set, 2 pieces | matching fixation clamp must be ordered separately **23,95 €**



930348 3M double-sided tape | 50 m x 15 mm **26,95 €**





ET-01-15


flat built-in-T-profile | 15 mm
for LED stripes up to 16,3 mm width

item	colour	dimensions L	price
975061	aluminium anodized	2m	**31,95 €**
975063	black	2m	**31,95 €**
975065	white	2m	**31,95 €**








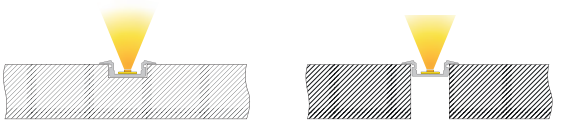



ET-02-15

high built-in-T-profile | 15 mm
for LED stripes up to 16,3 mm width

item	colour	dimensions L	price
975161	aluminium anodized	2m	**35,95 €**
975168	aluminium anodized	3m	**54,95 €**
975163	black	2m	**35,95 €**
975165	white	2m	**35,95 €**

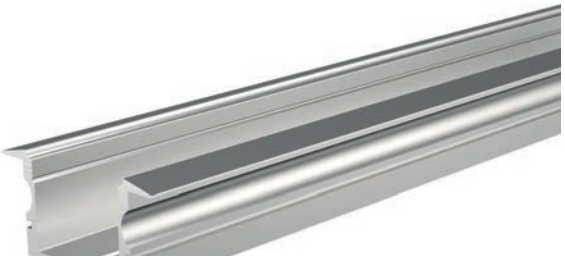









covers | PMMA [polymethylmethacrylat]
for 15 mm profiles

	clear	mat	milky	
1m	**983030**	**983032**	**983034**	**9,95 €**
2m	**983031**	**983033**	**983035**	**19,95 €**
3m	**983038**	**983037**	**983036**	**28,95 €**
1m	**983530**	**983532**	**983534**	**9,95 €**
2m	**983531**	**983533**	**983535**	**19,95 €**
3m		**983539**	**983536**	**28,95 €**
1m		**984032**	**984034**	**9,95 €**
2m		**984033**	**984035**	**19,95 €**
3m			**984036**	**28,95 €**
1m		**984532**	**984534**	**9,95 €**
2m		**984533**	**984535**	**19,95 €**


end caps set | 2 pieces **4,95 €**
for 15 mm profiles




white	**978110**	**978150**
grey	**978111**	**978151**
black	**978112**	**978152**



white	**978610**	**978650**
grey	**978611**	**978651**
black	**978612**	**978652**




white	**979130**	**979150**
grey	**979131**	**979151**
black	**979132**	**979152**



white	**979630**	**979650**
grey	**979631**	**979651**
black	**979632**	**979652**

987008 fixation clamp 15 | set consisting of 2 pieces **3,95 €**



987080 universal mounting clip brackets [pivotable] set, 2 pieces | matching fixation clamp must be ordered separately **23,95 €**



930349 3M double-sided tape | 50 m x 20 mm **34,95 €**







With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg

H- und groove-profiles


Groove and H-profiles are offered with a comprehensive range of mounting accessories and are hard to beat in terms of versatility. The range of accessories includes cable suspensions, tension springs, sliding blocks and much more.


AH-01-20

H-profile with cooling fins and mounting profile | 20 mm
for LED stripes up to 21,3 mm width



item	colour	dimensions L	price
970261	aluminium anodized	2m	**46,95 €**
970262	aluminium anodized	3m	**74,95 €**










With the kind support of BEST Bellemann Elektro ServiceTeam GmbH, Rauenberg-Malschenberg

covers | PMMA [polymethylmethacrylat]
for 20 mm profiles

	clear	mat	milky	
				
1m	**983040**		**983044**	**11,50 €**
2m	**983041**		**983045**	**21,95 €**
3m			**983046**	**32,95 €**
				
1m			**984044**	**11,50 €**
2m			**984045**	**21,95 €**
				
1m			**984544**	**11,50 €**
2m			**984545**	**21,95 €**


end caps set | 2 pieces **4,95 €**
for 20 mm profiles

	grey	**978311**
	grey	**979241**
	grey	**979741**


MOUNTING / CARRIER PROFILE FOR H-PROFILE 20 MM

for AH-01-20

970770 1m aluminium natural **11,95 €**





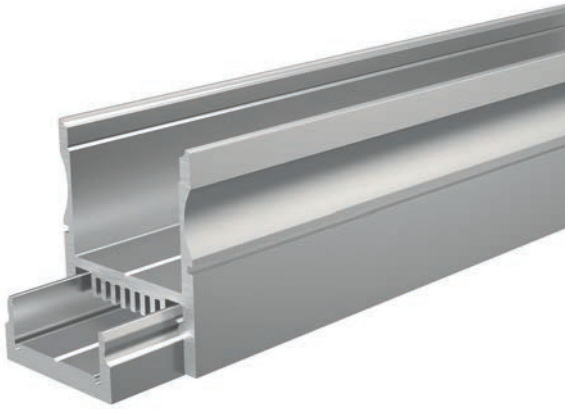


930650 screws set, incl. each 10 pieces **7,95 €**
6 x 35 mm nylon dowels
4,5 x 45 mm stainless steel screw





AU-03-12


groove profiles for pendulum | 12 mm | suitable for rope suspension
for LED stripes up to 13,3 mm width

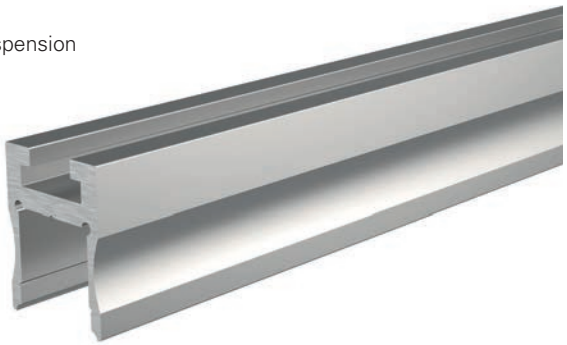

item	colour	dimensions L	price
970231	aluminium anodized	2m	**37,95 €**



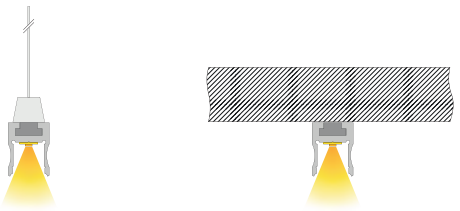

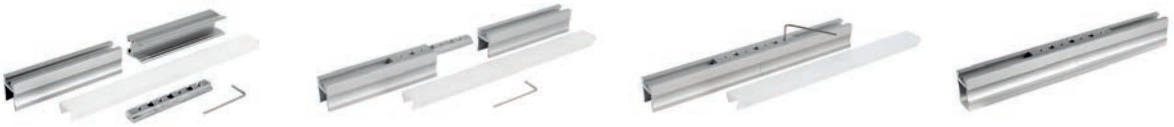







With the kind support of Friese Elektrotechnik, Ettenheim

covers | PMMA [polymethylmethacrylat]
for 12 mm profiles

	clear	mat	milky	
				
1m	**983020**	**983022**	**983024**	**7,95 €**
2m	**983021**	**983023**	**983025**	**17,95 €**
3m	**983028**	**983027**	**983026**	**25,95 €**
				
1m	**983520**	**983522**	**983524**	**7,95 €**
2m	**983521**	**983523**	**983525**	**17,95 €**
3m	**983527**		**983526**	**25,95 €**
				
1m		**984022**	**984024**	**7,95 €**
2m		**984023**	**984025**	**17,95 €**
3m			**984026**	**25,95 €**
				
1m		**984522**	**984524**	**7,95 €**
2m		**984523**	**984525**	**17,95 €**
3m			**984526**	**25,95 €**

end caps set | 2 pieces **4,95 €**
for 12 mm profiles

 	grey	**978291**
 	grey	**978711**
 	grey	**979221**
 	grey	**979721**


987060 wire suspension, pivotable, 2m | set | 2 pieces **35,95 €**
For the installation of the wire suspension you need, depending on the profile, the universal sliding block 987020.




987020 universal sliding block/straight connector set | 2 pieces **7,95 €**





ET-04-12
groove-built-in-T-profile | 12 mm
for LED stripes up to 13,3 mm width

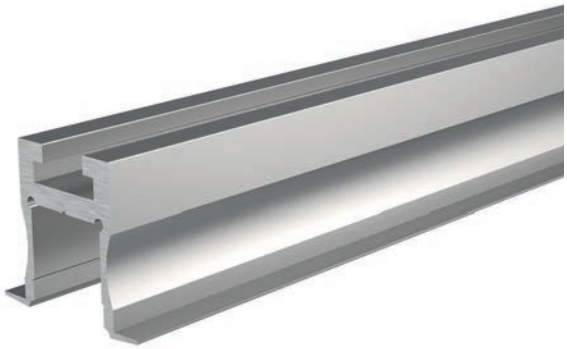

item	colour	dimensions L	price
975231	aluminium anodized	2m	**39,95 €**



















covers | PMMA [polymethylmethacrylat]
for 12 mm profiles

	clear	mat	milky	
				
1m	**983020**	**983022**	**983024**	**7,95 €**
2m	**983021**	**983023**	**983025**	**17,95 €**
3m	**983028**	**983027**	**983026**	**25,95 €**
				
1m	**983520**	**983522**	**983524**	**7,95 €**
2m	**983521**	**983523**	**983525**	**17,95 €**
3m	**983527**		**983526**	**25,95 €**
				
1m		**984022**	**984024**	**7,95 €**
2m		**984023**	**984025**	**17,95 €**
3m			**984026**	**25,95 €**
				
1m		**984522**	**984524**	**7,95 €**
2m		**984523**	**984525**	**17,95 €**
3m			**984526**	**25,95 €**


end caps set | 2 pieces **4,95 €**
for 12 mm profiles




grey **978301**



grey **978721**



grey **979231**




grey **979731**

end caps set | 2 pieces | aluminium **21,95 €**



silver **988021**

987040 sliding block with springsset
set | 2 pieces **7,95 €**



987020 universal sliding block/straight connector
set | 2 pieces **7,95 €**




AU-10-12


groove-U-profile | 12 mm
for LED stripes up to 13 mm width




item	colour	dimensions L	price
970280	aluminium anodized	2m	**35,95 €**
970281	aluminium anodized	3m	**54,95 €**
970284	white	2m	**35,95 €**
970285	white	3m	**54,95 €**

- multifunction
- pendulum
- concealed mounting
- extendable through corner / longitudinal connectors

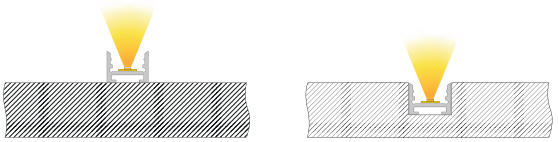








With the kind support of Friese Elektrotechnik, Ettenheim

covers | PMMA [polymethylmethacrylat]
for 12 mm profiles

	clear	mat	milky	
				
2m			**983090**	**23,95 €**
3m			**983091**	**35,95 €**

end caps set | 2 pieces | aluminium **19,95 €**
for 12 mm profiles





☐ silver **980020**



☐ silver **980021**





980020





980021

980023 mountings clip | Set | 2 pieces **4,95 €**



987025 sliding block | straight connector **9,95 €**



987026 sliding block | 120° corner connector **9,95 €**



987027 sliding block | 90° corner connector **9,95 €**





With the kind support of Albtherme Waldbronn / Ziegler Technics buero@ziegler-technics.de



step-, socket-, angle-, corner-profiles


The perfect light is not always planned from the very planned from the start. With the mounting and corner profiles, you can also integrate linear light at a later stage.

AL-01-10

step-profile | 10 mm
for LED stripes up to 11,3 mm width



item	colour	dimensions L	price
970503	aluminium anodized	2m	**59,95 €**
970502	aluminium anodized	3m	**94,95 €**

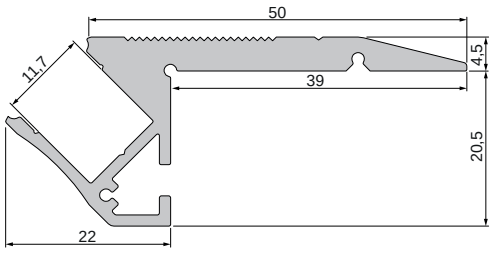





With the kind support of SH-Lichttechnik, Pfullingen und Becks Reutlingen

covers | PMMA [polymethylmethacrylat]
for 10 mm profiles




	clear	mat	milky	
1m	**983010**	**983012**	**983014**	**7,95 €**
2m	**983011**	**983013**	**983015**	**17,95 €**
3m	**983016**	**983017**	**983018**	**25,95 €**
4m	**983060**	**983061**	**983062**	**33,95 €**




walkable | PC [polycarbonate]


1m			**983080**	**11,50 €**
2m			**983081**	**21,95 €**
3m			**983082**	**32,95 €**

end caps set | right + left **4,95 €**
for 10 mm profiles



grey **978191**





930650 screws set, incl. each 10 pieces
6 x 35 mm nylon dowels
4,5 x 45 mm stainless steel screw

7,95 €





AL-02-10

step-profile | 10 mm
for LED stripes up to 11,3 mm width



item	colour	dimensions L	price
970520	aluminium anodized	1m	**30,95 €**
970523	aluminium anodized	2m	**59,95 €**
970522	aluminium anodized	3m	**94,95 €**

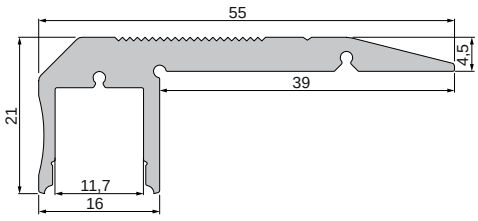






With the kind support of Elektro Grün, Neustadt an der Weinstraße

covers | PMMA [polymethylmethacrylat]
for 10 mm profiles

	clear	mat	milky	
				
1m	**983010**	**983012**	**983014**	**7,95 €**
2m	**983011**	**983013**	**983015**	**17,95 €**
3m	**983016**	**983017**	**983018**	**25,95 €**
4m	**983060**	**983061**	**983062**	**33,95 €**

end caps set | right + left **4,95 €**
for 10 mm profiles



grey **978201**

930650 screws set, incl. each 10 pieces
6 x 35 mm nylon dowels
4,5 x 45 mm stainless steel screw

7,95 €




AV-01-20

angle-profile 45° for coving | with cooling fins on one side | 22 mm
for LED stripes up to 22 mm width





item	colour	dimensions L	price
970460	aluminium anodized	2m	**35,95 €**

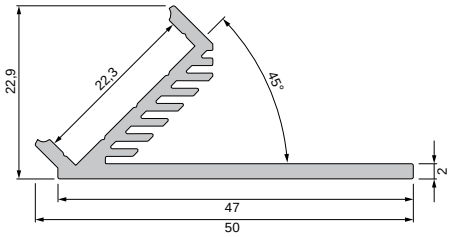





pre-punched drill / screw holes [Ø 3; 4 und 5 mm]
for easier mounting



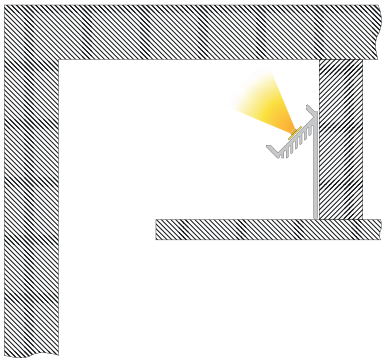


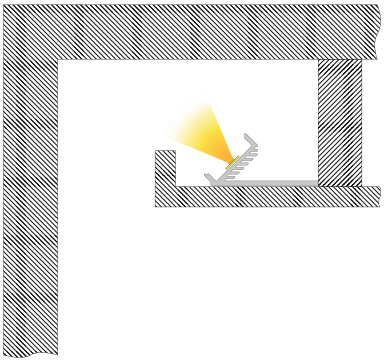


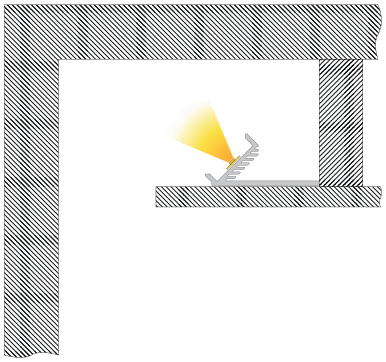


covers | PMMA [polymethylmethacrylat]
for 22 mm profiles


	clear	mat	milky	
				
1m	**983040**		**983044**	**11,50 €**
2m	**983041**		**983045**	**21,95 €**
3m			**983046**	**32,95 €**
				
1m			**984044**	**11,50 €**
2m			**984045**	**21,95 €**
				
1m			**984544**	**11,50 €**
2m			**984545**	**21,95 €**










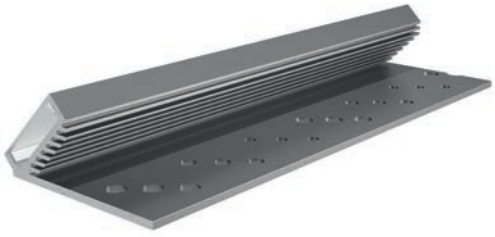

930105 310ml cartridge, white | glue+sealing power **35,95 €**



930350 3M double-sided tape | 50 m x 25 mm **42,95 €**



930650 screws set, incl. each 10 pieces
6 x 35 mm nylon dowels
4,5 x 45 mm stainless steel screw **7,95 €**




AV-02-20

angle-profile 135° for coving | double-sided | 20 mm
for LED stripes up to 22 / 17 mm width


item	colour	dimensions L	price
970470	aluminium anodized	2m	**35,95 €**





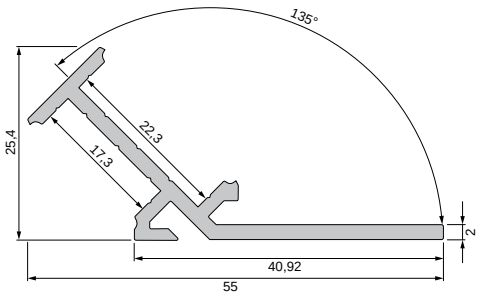








pre-punched drill / screw holes [Ø 3; 4 und 5 mm]
for easier mounting

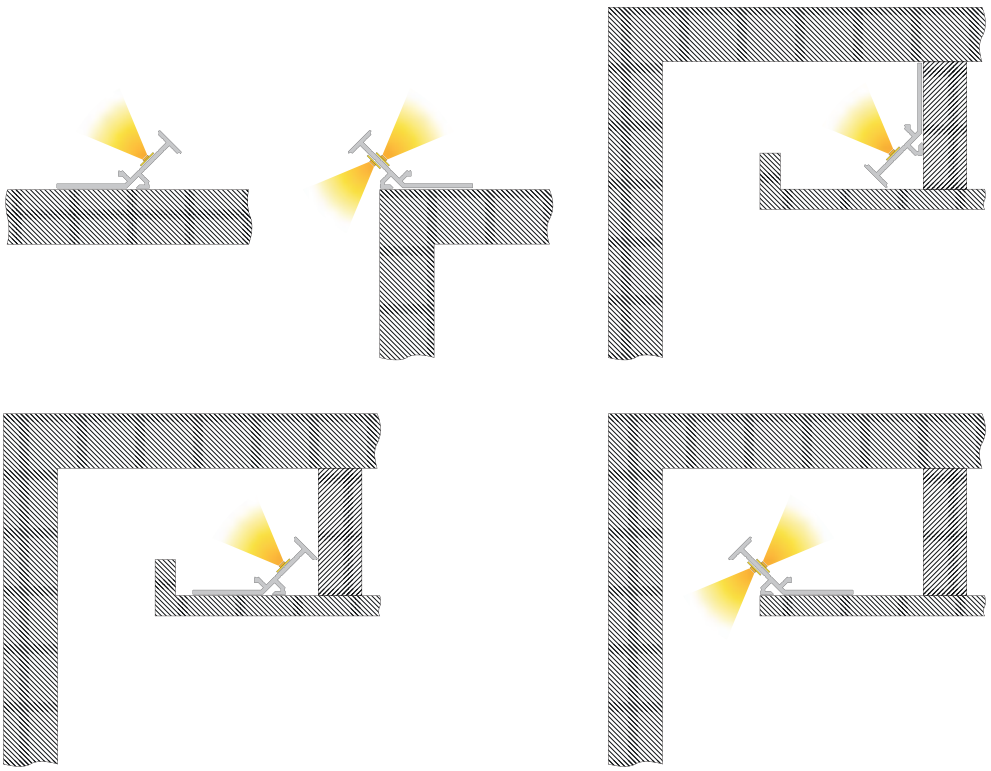

20er covers | PMMA [polymethylmethacrylat]

	clear	mat	milky	
				
1m	**983040**		**983044**	**11,50 €**
2m	**983041**		**983045**	**21,95 €**
3m			**983046**	**32,95 €**
				
1m			**984044**	**11,50 €**
2m			**984045**	**21,95 €**
				
1m			**984544**	**11,50 €**
2m			**984545**	**21,95 €**


15er covers | PMMA [polymethylmethacrylat]

					
1m	**983030**	**983032**	**983034**	**9,95 €**	
2m	**983031**	**983033**	**983035**	**19,95 €**	
3m	**983038**	**983037**	**983036**	**28,95 €**	
					
1m	**983530**	**983532**	**983534**	**9,95 €**	
2m	**983531**	**983533**	**983535**	**19,95 €**	
3m		**983539**	**983536**	**28,95 €**	
					
1m		**984032**	**984034**	**9,95 €**	
2m		**984033**	**984035**	**19,95 €**	
3m			**984036**	**28,95 €**	
					
1m		**984532**	**984534**	**9,95 €**	
2m		**984533**	**984535**	**19,95 €**	

930105 310ml cartridge, white | glue+sealing power **35,95 €**



930350 3M double-sided tape | 50 m x 25 mm **42,95 €**




930650 screws set, incl. each 10 pieces **7,95 €**
6 x 35 mm nylon dowels
4,5 x 45 mm stainless steel screw




AM-02-10
socket-profile | 10 mm
for LED stripes up to 11,3 mm width

item	colour	dimensions L	price
970602	aluminium anodized	2m	**82,95 €**
970600	aluminium anodized	3m	**124,95 €**
970601	black	3m	**124,95 €**



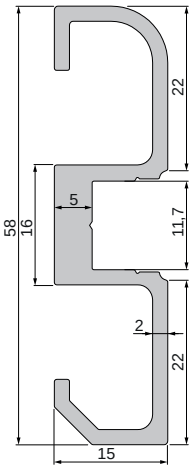

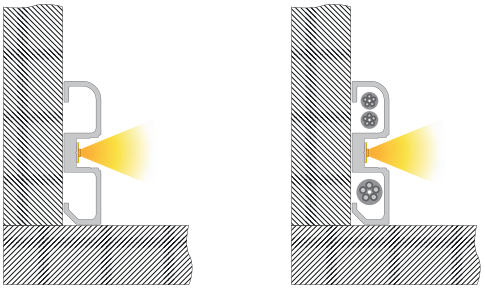




covers | PMMA [polymethylmethacrylat]
for 10 mm profiles


	clear	mat	milky	
				
1m	**983010**	**983012**	**983014**	**7,95 €**
2m	**983011**	**983013**	**983015**	**17,95 €**
3m	**983016**	**983017**	**983018**	**25,95 €**
4m	**983060**	**983061**	**983062**	**33,95 €**
				
1m	**983510**	**983512**	**983514**	**7,95 €**
2m	**983511**	**983513**	**983515**	**17,95 €**
3m	**983516**	**983517**	**983518**	**25,95 €**
4m	**983560**	**983561**	**983562**	**33,95 €**
				
1m		**984012**	**984014**	**7,95 €**
2m		**984013**	**984015**	**17,95 €**
3m		**984017**	**984018**	**25,95 €**
4m		**984010**	**984011**	**33,95 €**


end caps set | right + left **4,95 €**





grey	**978241**	
black	**978242**	



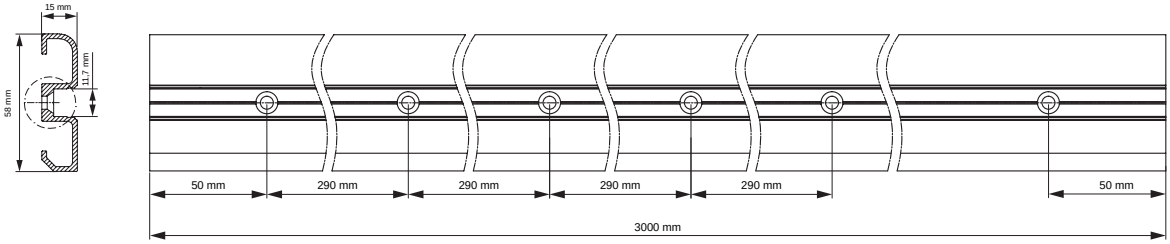

930650 screws set, incl. each 10 pieces
6 x 35 mm nylon dowels
4,5 x 45 mm stainless steel screw

7,95 €




AM-01-10


built-on / substructure-profile | ultraflach, H: 7 mm | 10 mm
for LED stripes up to 11,3 mm width



item	colour	dimensions L	price
970301	aluminium anodized	2m	**37,95 €**
970308	aluminium anodized	3m	**59,95 €**
970303	black	2m	**37,95 €**
970305	white	2m	**37,95 €**










With the kind support of BEST Bellemann Elektro ServiceTeam GmbH, Rauenberg-Malschenberg

covers | PC [polycarbonate]
for 10 mm profiles


	clear	mat	milky	
				
1m	**983010**	**983012**	**983014**	**7,95 €**
2m	**983011**	**983013**	**983015**	**17,95 €**
3m	**983016**	**983017**	**983018**	**25,95 €**
4m	**983060**	**983061**	**983062**	**33,95 €**
				
1m	**983510**	**983512**	**983514**	**7,95 €**
2m	**983511**	**983513**	**983515**	**17,95 €**
3m	**983516**	**983517**	**983518**	**25,95 €**
4m	**983560**	**983561**	**983562**	**33,95 €**

end caps set | 2 pieces **4,95 €**
for 10 mm profiles



☐	white	**978700**
▒	grey	**978701**
■	black	**978702**






▒	grey

980541

930105 310ml cartridge, white | glue+sealing power **35,95 €**



930348 3M double-sided tape | 50 m x 15 mm **26,95 €**



930650 screws set, incl. each 10 pieces **7,95 €**
6 x 35 mm nylon dowels
4,5 x 45 mm stainless steel screw





AV-03-12


corner-profile | 12 mm
for LED stripes up to 13,3 mm width

item	colour	dimensions L	price
970433	aluminium anodized	2m	**37,95 €**
970431	aluminium anodized	2,5m	**46,95 €**
970434	aluminium anodized	3m	**59,95 €**
970437	white	2m	**37,95 €**
970438	white	3m	**59,95 €**





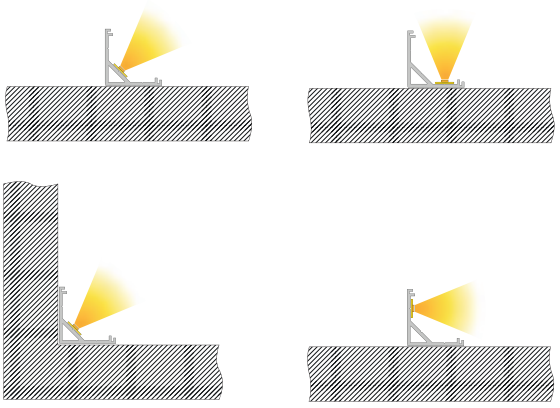

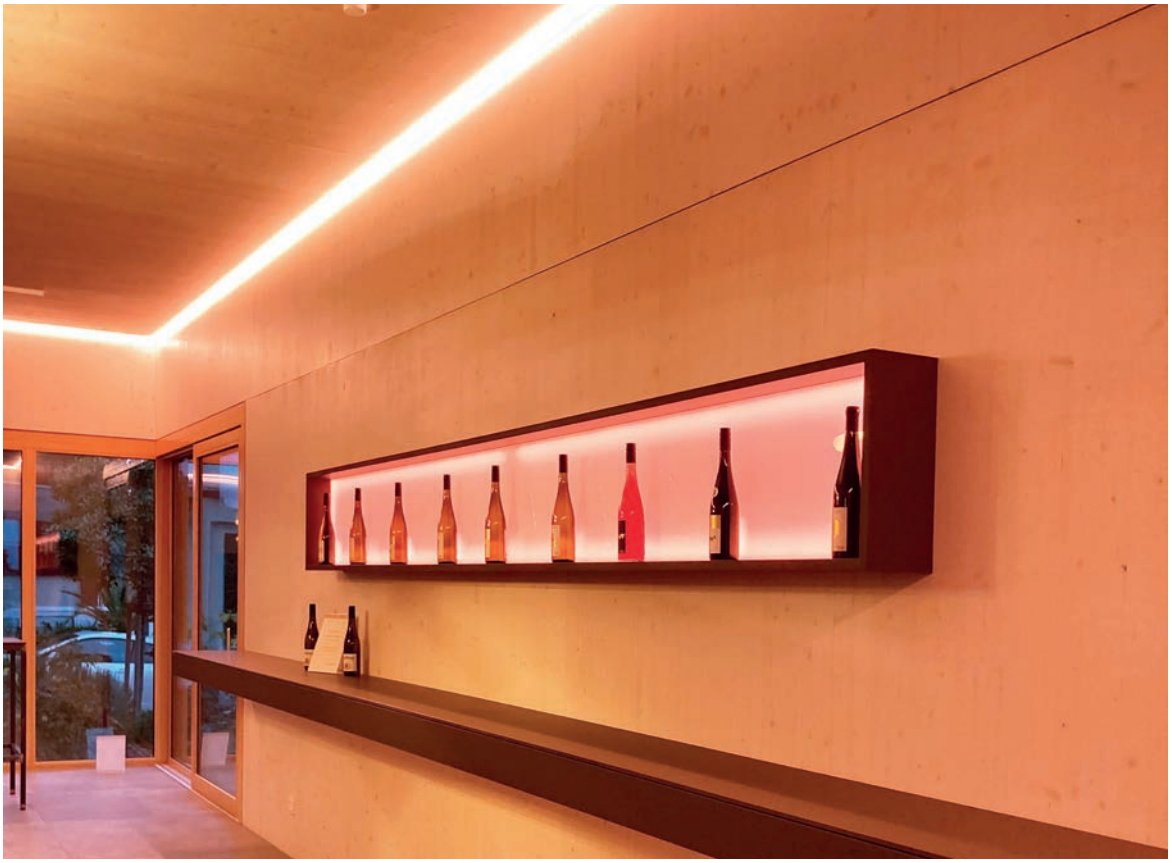


With the kind support of Elektro Grün, Neustadt an der Weinstraße

covers | PC [polycarbonate]
for 12 mm profiles

	clear	mat	milky	
				
2m			**984565**	**21,95 €**
3m			**984568**	**32,95 €**


end caps set | 2 pieces **4,95 €**
for 12 mm profiles



grey **979751**

930105	310ml cartridge, white | glue+sealing power	**35,95 €**
930348	3M double-sided tape | 50 m x 15 mm	**26,95 €**
930650	screws set, incl. each 10 pieces 6 x 35 mm nylon dowels 4,5 x 45 mm stainless steel screw	**7,95 €**







AV-01-10

corner-profile | 10 mm
for LED stripes up to 11,3 mm width



item	colour	dimensions L	price
970401	aluminium anodized	2m	**35,95 €**
970404	aluminium anodized	3m	**54,95 €**
970403	white	2m	**35,95 €**








Foto: Daniel Vieser . Architekturfotografie, Karlsruhe

covers | PMMA [polymethylmethacrylat]
for 10 mm profiles

	clear	mat	milky	
				
1m	**983010**	**983012**	**983014**	**7,95 €**
2m	**983011**	**983013**	**983015**	**17,95 €**
3m	**983016**	**983017**	**983018**	**25,95 €**
4m	**983060**	**983061**	**983062**	**33,95 €**
				
1m	**983510**	**983512**	**983514**	**7,95 €**
2m	**983511**	**983513**	**983515**	**17,95 €**
3m	**983516**	**983517**	**983518**	**25,95 €**
4m	**983560**	**983561**	**983562**	**33,95 €**
				
1m		**984012**	**984014**	**7,95 €**
2m		**984013**	**984015**	**17,95 €**
3m		**984017**	**984018**	**25,95 €**
4m		**984010**	**984011**	**33,95 €**
				
1m		**984512**	**984514**	**7,95 €**
2m		**984513**	**984515**	**17,95 €**
3m		**984517**	**984518**	**25,95 €**
4m		**984510**	**984511**	**33,95 €**
				
1m	**985010**			**7,95 €**
2m	**985011**			**17,95 €**
3m	**985016**			**25,95 €**


end caps set | 2 pieces **4,95 €**
for 10 mm profiles



☐	white	**978170**
▩	grey	**978171**










930105 310ml cartridge, white | glue+sealing power **35,95 €**



930348 3M double-sided tape | 50 m x 15 mm **26,95 €**




930650 screws set, incl. each 10 pieces **7,95 €**
6 x 35 mm nylon dowels
4,5 x 45 mm stainless steel screw




EV-04-12

corner-profile | 12 mm
for LED stripes up to 13,3 mm width

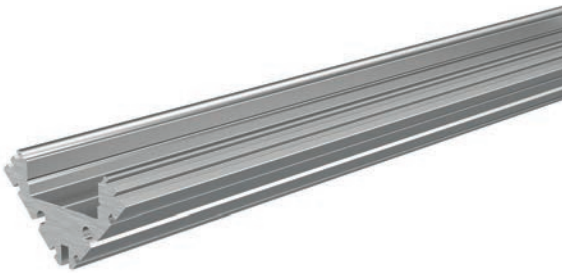

item	colour	dimensions L	price
975411	aluminium anodized	2m	**39,95 €**
975412	aluminium anodized	3m	**61,95 €**








With the kind support of Elektro Grün, Neustadt an der Weinstraße


covers | PMMA [polymethylmethacrylat]
for 12 mm profiles


	clear	mat	milky	
				
1m	**983020**	**983022**	**983024**	**7,95 €**
2m	**983021**	**983023**	**983025**	**17,95 €**
3m	**983028**	**983027**	**983026**	**25,95 €**
				
1m	**983520**	**983522**	**983524**	**7,95 €**
2m	**983521**	**983523**	**983525**	**17,95 €**
3m	**983527**		**983526**	**25,95 €**
				
1m		**984022**	**984024**	**7,95 €**
2m		**984023**	**984025**	**17,95 €**
3m			**984026**	**25,95 €**
				
1m		**984522**	**984524**	**7,95 €**
2m		**984523**	**984525**	**17,95 €**
3m			**984526**	**25,95 €**


end caps set | 2 pieces **4,95 €**
for 12 mm profiles




grey **978341**







987006 fixation clamp 12 | set consisting of 2 pieces **3,95 €**



987080 universal mounting clip brackets [pivotable] set, 2 pieces | matching fixation clamp must be ordered separately **23,95 €**



930105 310ml cartridge, white | glue+sealing power **35,95 €**



930650 screws set, incl. each 10 pieces
6 x 35 mm nylon dowels
4,5 x 45 mm stainless steel screw **7,95 €**





AV-05-12

corner-profile | 12 mm
for LED stripes up to 12,5 mm width

item	colour	dimensions L	price
970550	aluminium anodized	2m	**39,95 €**
970551	aluminium anodized	3m	**59,95 €**





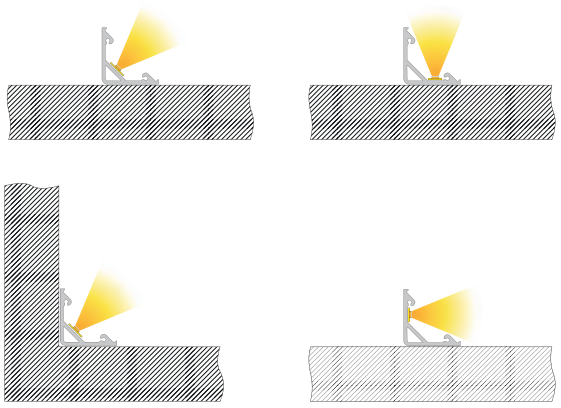








With the kind support of Albtherme Waldbronn / Ziegler Technics buero@ziegler-technics.de

covers | PC [polycarbonate]
for 12 mm profiles

	clear	mat	milky	
				
2m			**983100**	**23,95 €**
3m			**983101**	**35,95 €**
				
2m			**984570**	**23,95 €**
3m			**984571**	**35,95 €**
				
2m			**985570**	**23,95 €**
3m			**985571**	**35,95 €**


end caps set | 2 pieces | aluminium **21,95 €**
for 12 mm profiles

	silver	**978370**	
	silver	**979760**	
	silver	**980550**	

930105 310ml cartridge, white | glue+sealing power **35,95 €**



930350 3M double-sided tape | 50 m x 25 mm **42,95 €**



930650 screws set, incl. each 10 pieces **7,95 €**
6 x 35 mm nylon dowels
4,5 x 45 mm stainless steel screw





AV-05-15

corner-profile | 15 mm
for LED stripes up to 15,4 mm width




item	colour	dimensions L	price
970560	aluminium anodized	2m	**49,95 €**
970561	aluminium anodized	3m	**79,95 €**

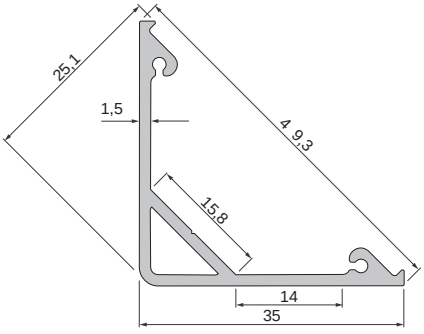





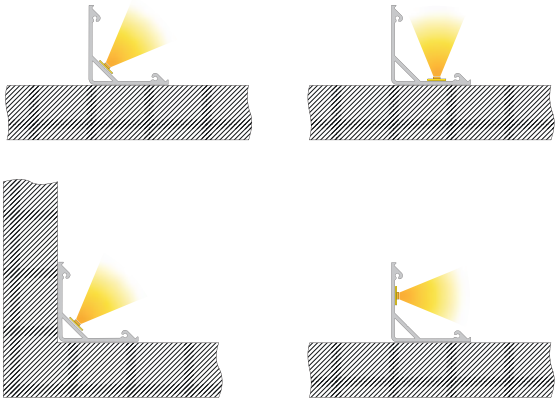





covers | PC [polycarbonate]
for 15 mm profiles

	clear	mat	milky		
					
2m			**983110**	**30,95 €**	
3m			**983111**	**44,95 €**	
					
2m			**984580**	**30,95 €**	
3m			**984581**	**44,95 €**	
					
2m			**985580**	**30,95 €**	
3m			**985581**	**44,95 €**	

end caps set | 2 pieces | aluminium **21,95 €**
for 15 mm profiles

			
silver	**978380**		
			
silver	**979770**		
			
silver	**980560**		


930105	310ml cartridge, white | glue+sealing power	**35,95 €**	
930350	3M double-sided tape | 50 m x 25 mm	**42,95 €**	
930650	screws set, incl. each 10 pieces 6 x 35 mm nylon dowels 4,5 x 45 mm stainless steel screw	**7,95 €**	

AV-05-25

corner-profile | suitable for rope suspension | 25 mm
for LED stripes up to 25,5 mm width



item	colour	dimensions L	price
970570	aluminium anodized	2m	**69,95 €**
970571	aluminium anodized	3m	**99,95 €**

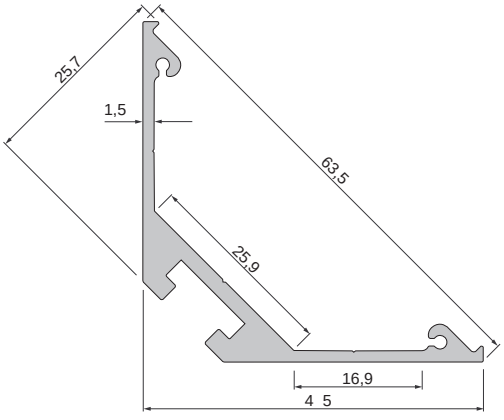








covers | PC [polycarbonate]
for 25 mm profiles


clear mat milky



2m	**983120**	**35,95 €**	
3m	**983121**	**54,95 €**	





2m	**984590**	**35,95 €**	
3m	**984591**	**54,95 €**	




2m	**985590**	**35,95 €**	
3m	**985591**	**54,95 €**	


end caps set | 2 pieces | aluminium **21,95 €**
for 25 mm profiles







☐ silver	**978390**		





☐ silver	**979780**		





☐ silver	**980570**		

987060 wire suspension, pivotable, 2m | set | 2 pieces **35,95 €**
For the installation of the wire suspension you need, depending on the profile, the universal sliding block 987020.




987020 universal sliding block/straight connector set | 2 pieces **7,95 €**



930105 310ml cartridge, white | glue+sealing power **35,95 €**



930350 3M double-sided tape | 50 m x 25 mm **42,95 €**



930650 screws set, incl. each 10 pieces **7,95 €**
6 x 35 mm nylon dowels
4,5 x 45 mm stainless steel screw





With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg



dry construction profiles


Our dry construction profiles offer you full creative freedom. Redefine linear light – whether as a primary light or for accent lighting.


EL-02-12


dry construction profile for wall coving | 12 mm
for LED stripes up to 14 mm width



item	colour	dimensions L	price
975491	aluminium anodized	2m	**82,95 €**
975496	aluminium anodized	3m	**124,95 €**
975495	white	2m	**82,95 €**

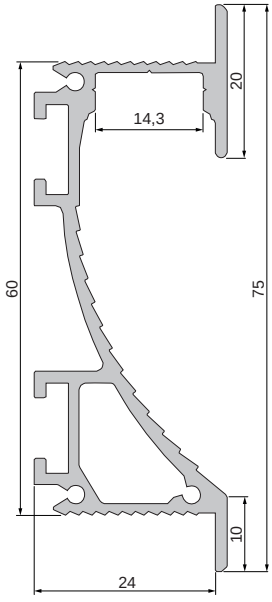

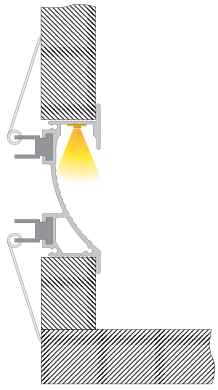

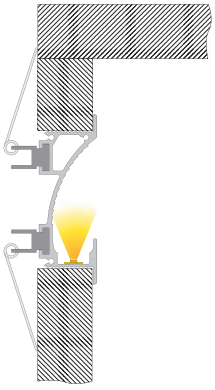








covers | PMMA [polymethylmethacrylat]
for 12 mm profiles

	clear	mat	milky	
				
1m	**983020**	**983022**	**983024**	**7,95 €**
2m	**983021**	**983023**	**983025**	**17,95 €**
3m	**983028**	**983027**	**983026**	**25,95 €**

end caps set | right + left **4,95 €**



white	**978250**	
grey	**978251**	


end caps set | right + left | aluminium **35,95 €**



silver	**978252**



930105 310ml cartridge, white | glue+sealing power **35,95 €**




987040 sliding block with springsset
set | 2 pieces **7,95 €**




987020 universal sliding block/straight connector
set | 2 pieces **7,95 €**


ET-03-10

dry construction-built-in-T-profile | 10 mm
for LED stripes up to 12 mm width

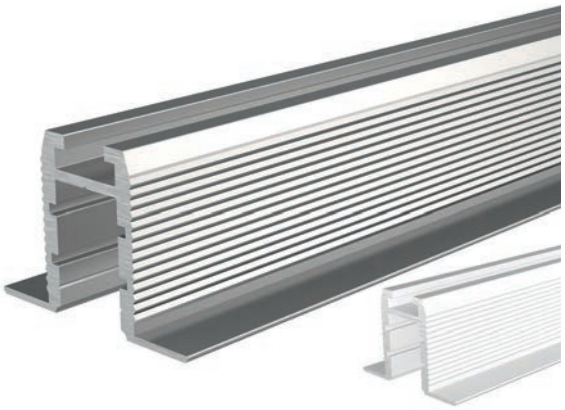

item	colour	dimensions L	price
975471	aluminium anodized	2,5m	**59,95 €**
975476	aluminium anodized	3m	**75,95 €**
975475	white	2,5m	**59,95 €**



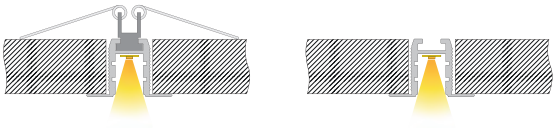



With the kind support of Friese Elektrotechnik, Ettenheim



covers | PMMA [polymethylmethacrylat]
for 10 mm profiles

	clear	mat	milky	
1m	**983010**	**983012**	**983014**	**7,95 €**
2m	**983011**	**983013**	**983015**	**17,95 €**
3m	**983016**	**983017**	**983018**	**25,95 €**
4m	**983060**	**983061**	**983062**	**33,95 €**



1m	**984012**	**984014**	**7,95 €**
2m	**984013**	**984015**	**17,95 €**
3m	**984017**	**984018**	**25,95 €**
4m	**984010**	**984011**	**33,95 €**

1m	**984512**	**984514**	**7,95 €**
2m	**984513**	**984515**	**17,95 €**
3m	**984517**	**984518**	**25,95 €**
4m	**984510**	**984511**	**33,95 €**



end caps set | 2 pieces **4,95 €**
for 10 mm profiles

white	**978260**
grey	**978261**





white	**979200**
grey	**979201**

white	**979700**
grey	**979701**

970762 carrier profile for LED stripes
aluminium natural | 1,25m
to reduce the insertion depth of the LED stripe
7,95 €






930105 310ml cartridge, white | glue+sealing power
35,95 €



987040 sliding block with springsset
set | 2 pieces
7,95 €




987020 universal sliding block/straight connector
set | 2 pieces
7,95 €




EL-03-10

dry construction profile for ceiling coves | 10 mm
for LED stripes up to 12 mm width

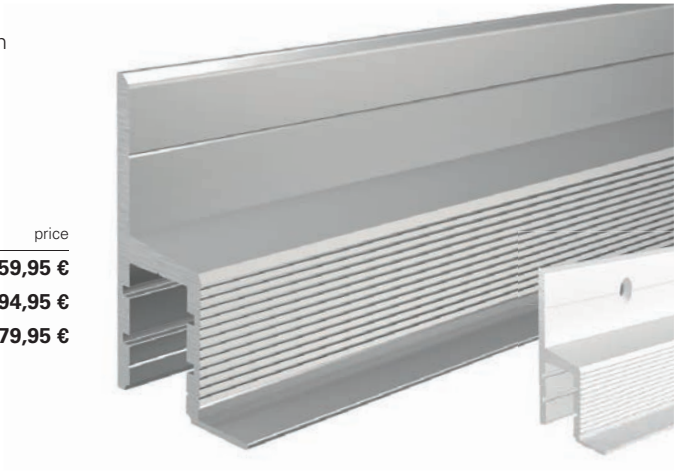

item	colour	dimensions L	price
975483	aluminium anodized	2m	**59,95 €**
975486	aluminium anodized	3m	**94,95 €**
975485	white	2,5m	**79,95 €**

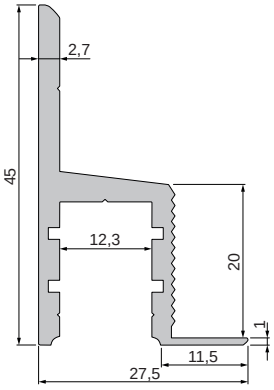







covers | PMMA [polymethylmethacrylat]
for 10 mm profiles

end caps set | right + left **4,95 €**


	clear	mat	milky	
1m	**983010**	**983012**	**983014**	**7,95 €**
2m	**983011**	**983013**	**983015**	**17,95 €**
3m	**983016**	**983017**	**983018**	**25,95 €**
4m	**983060**	**983061**	**983062**	**33,95 €**






white	**978270**
grey	**978271**


1m	**984012**	**984014**	**7,95 €**
2m	**984013**	**984015**	**17,95 €**
3m	**984017**	**984018**	**25,95 €**
4m	**984010**	**984011**	**33,95 €**






white	**979210**
grey	**979211**

1m	**984512**	**984514**	**7,95 €**
2m	**984513**	**984515**	**17,95 €**
3m	**984517**	**984518**	**25,95 €**
4m	**984510**	**984511**	**33,95 €**







white	**979710**
grey	**979711**

970762 carrier profile for LED stripes
aluminium natural | 1,25m
to reduce the insertion depth of the LED stripe

7,95 €



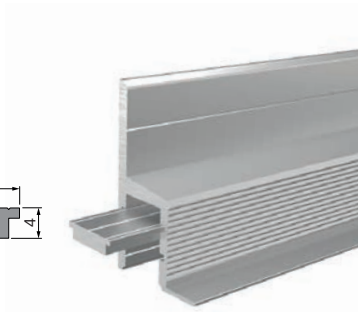


930650 screws set, incl. each 10 pieces
6 x 35 mm nylon dowels
4,5 x 45 mm stainless steel screw

7,95 €



EU-01-36


dry construction-built-in-U-profile | 35 mm
for LED stripes up to 36 mm width

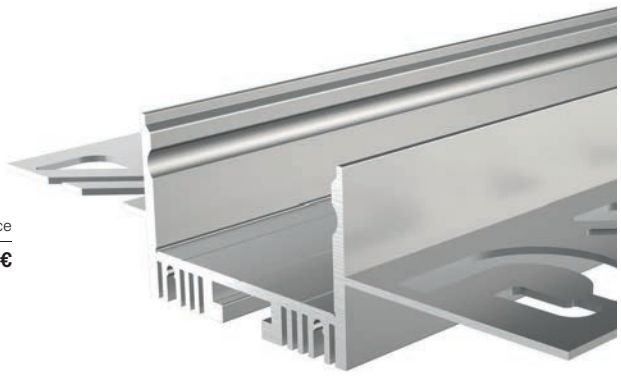


item	colour	dimensions L	price
975501	aluminium natural	3m	**124,95 €**

- optimised and designed for the built-in of 12.5 mm gypsum plasterboards
- easy to plaster thanks to optional inlay for protection
- increased passive cooling of the stripes due to cooling fins
- optimal for homogeneous bright light lines



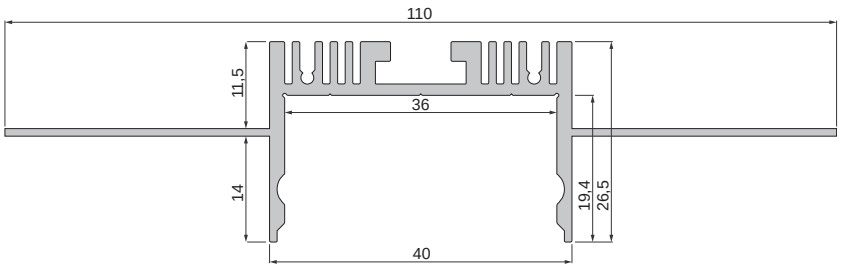



covers | PMMA [polymethylmethacrylat]
for 35 mm profiles

clear mat milky





3m **985601** **42,95 €**


end caps set | 2 pieces | aluminium **21,95 €**




silver **978175**




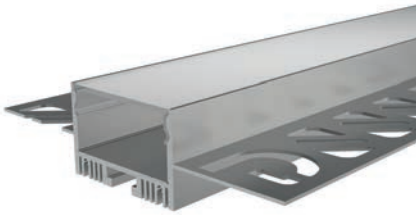


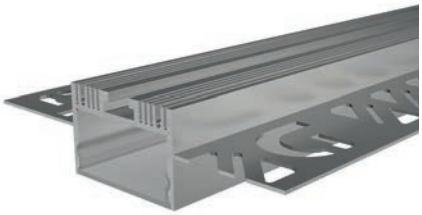

PROTECTION COVER

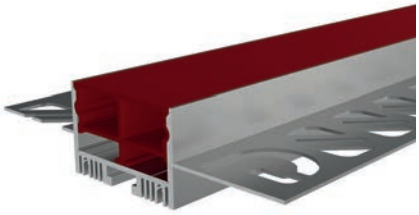

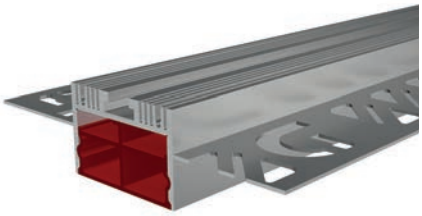





985605 inlay / dummy [reusable] **30,95 €**
plastic | red | 3m
to protect against soiling during plastering



With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg



tile profiles

Tile profiles play to every corner and closing area. Do away with conventional tile end profiles and set a new standard with linear light.


EL-01-08


tile profile | 8 mm
for LED stripes up to 9,3 mm width



item	colour	dimensions L	price
975331	aluminium anodized	2,5m	**53,95 €**
975334	aluminium anodized	3m	**64,95 €**

designed for tile thickness up to max. 9 mm



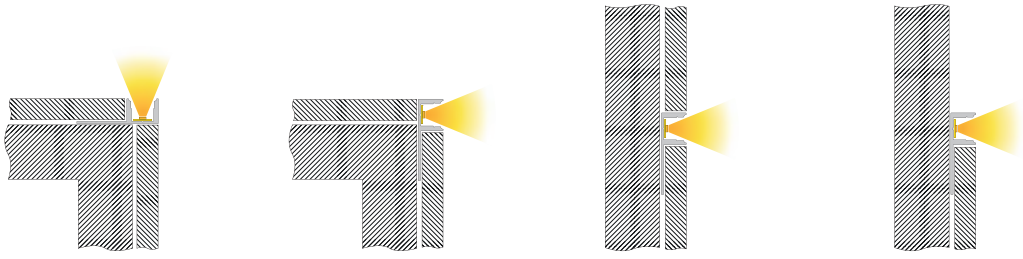

covers | PMMA [polymethylmethacrylat]
for 8 mm profiles

	clear	mat	milky	
1m	**983000**	**983002**	**983004**	**7,95 €**
2m	**983001**	**983003**	**983005**	**17,95 €**
3m	**983006**	**983007**	**983008**	**25,95 €**

end caps set | 2 pieces **4,95 €**
for 8 mm profiles

grey	**978211**



With the kind support of BEST Bellemann Elektro ServiceTeam GmbH, Rauenberg-Malschenberg


EL-03-12


tile profile | 12 mm
for LED stripes up to 13,3 mm width



item	colour	dimensions L	price
975360	aluminium anodized	1,25m	**28,95 €**
975361	aluminium anodized	2,5m	**59,95 €**
975365	white	2,5m	**59,95 €**


designed for tile thickness up to max. 12 mm

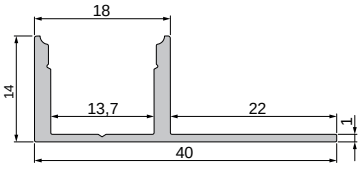


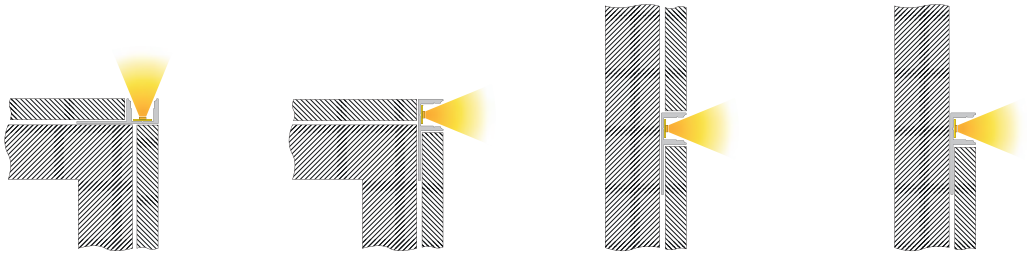

covers | PMMA [polymethylmethacrylat]
for 12 mm profiles

	clear	mat	milky	
				
1m	**983020**	**983022**	**983024**	**7,95 €**
2m	**983021**	**983023**	**983025**	**17,95 €**
3m	**983028**	**983027**	**983026**	**25,95 €**
				
1m		**984022**	**984024**	**7,95 €**
2m		**984023**	**984025**	**17,95 €**
3m			**984026**	**25,95 €**







With the kind support of BEST Bellemann Elektro ServiceTeam GmbH, Rauenberg-Malschenberg


EA-03-12


tile-closing-profile | 12 mm
for LED stripes up to 13 mm width



item	colour	dimensions L	price
975390	aluminium anodized	2m	**38,95 €**
975391	aluminium anodized	3m	**59,95 €**
975394	white	2m	**38,95 €**
975395	white	3m	**59,95 €**


designed for tile thickness up to max. 12 mm




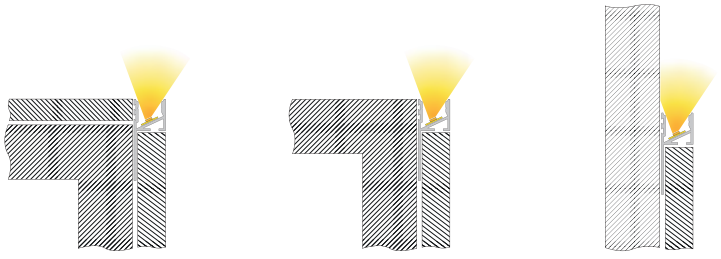

covers | PMMA [polymethylmethacrylat]
for 12 mm profiles

	clear	mat	milky	
				
1m	**983000**	**983002**	**983004**	**7,95 €**
2m	**983001**	**983003**	**983005**	**17,95 €**
3m	**983006**	**983007**	**983008**	**25,95 €**
				
1m		**984002**	**984004**	**7,95 €**
2m		**984003**	**984005**	**17,95 €**









EV-01-08


tile-inside-corner-profile | 8 mm
for LED stripes up to 9,3 mm width

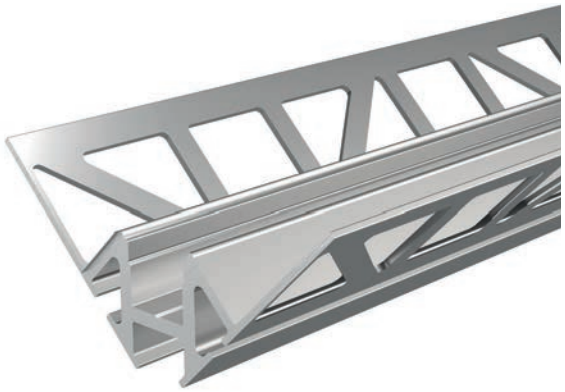

item	colour	dimensions L	price
975341	aluminium anodized	2,5m	**79,95 €**
975344	aluminium anodized	3m	**99,95 €**

designed for tile thickness up to max. 9 mm

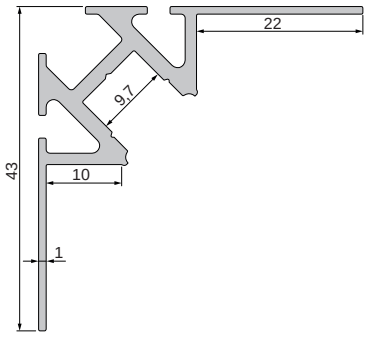




covers | PMMA [polymethylmethacrylat]
for 8 mm profiles

	clear	mat	milky	
1m	**983000**	**983002**	**983004**	**7,95 €**
2m	**983001**	**983003**	**983005**	**17,95 €**
3m	**983006**	**983007**	**983008**	**25,95 €**


1m	**985504**	**7,95 €**
2m	**985505**	**17,95 €**
3m	**985508**	**25,95 €**

end caps set | 2 pieces **4,95 €**
for 8 mm profiles

grey **978221**




grey **980501**






EV-01-12


tile-inside-corner-profile | 12 mm
for LED stripes up to 13,3 mm width

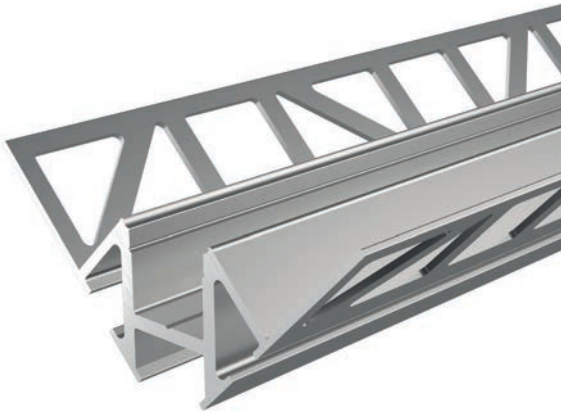

item	colour	dimensions L	price
975371	aluminium anodized	2,5m	**99,95 €**
975375	white	2,5m	**99,95 €**


designed for tile thickness up to max. 12 mm

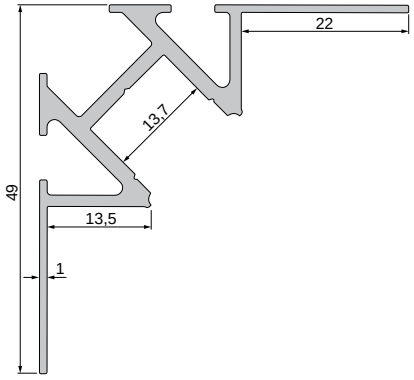




covers | PMMA [polymethylmethacrylat]
for 12 mm profiles


	clear	mat	milky	
				
1m	**983020**	**983022**	**983024**	**7,95 €**
2m	**983021**	**983023**	**983025**	**17,95 €**
3m	**983028**	**983027**	**983026**	**25,95 €**



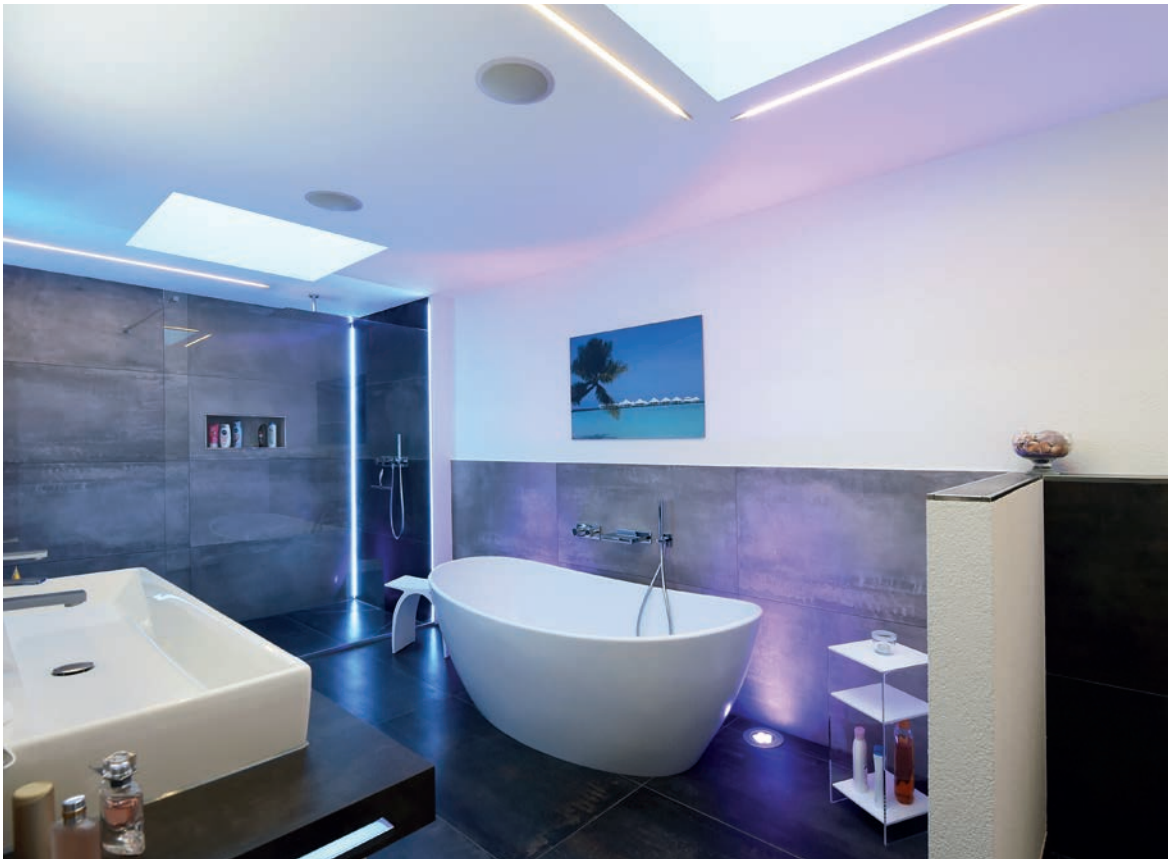


EV-02-08


tile-outside-corner-profile | 8 mm
for LED stripes up to 9,3 mm width

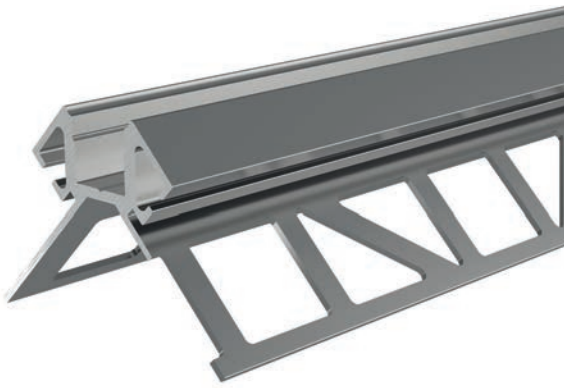

item	colour	dimensions L	price
975351	aluminium anodized	2,5m	**79,95 €**
975353	aluminium anodized	3m	**99,95 €**

designed for tile thickness up to max. 9 mm


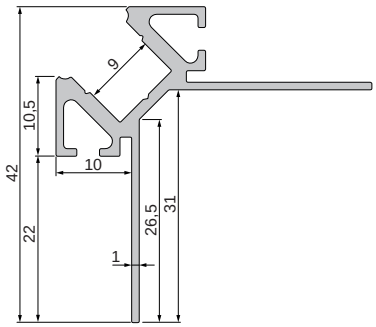




covers | PMMA [polymethylmethacrylat]
for 8 mm profiles

	clear	mat	milky	
				
1m	**983000**	**983002**	**983004**	**7,95 €**
2m	**983001**	**983003**	**983005**	**17,95 €**
3m	**983006**	**983007**	**983008**	**25,95 €**
				
1m			**985504**	**7,95 €**
2m			**985505**	**17,95 €**
3m			**985508**	**25,95 €**


end caps set | 2 pieces **4,95 €**
for 8 mm profiles

	grey	**978231**	
	grey	**980511**	




EV-02-12


tile-outside-corner-profile | 12 mm
for LED stripes up to 13,3 mm width

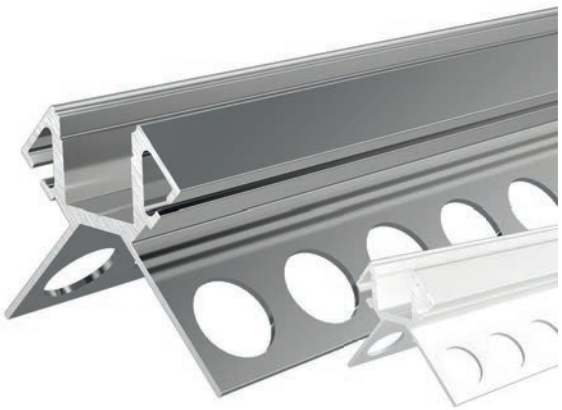

item	colour	dimensions L	price
975381	aluminium anodized	2,5m	**99,95 €**
975385	white	2,5m	**99,95 €**


designed for tile thickness up to max. 12 mm

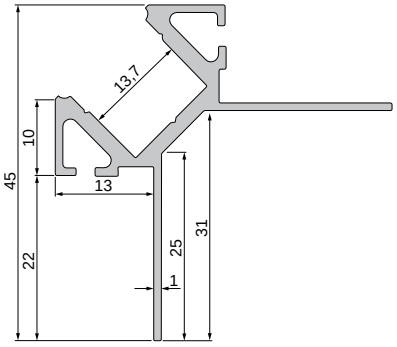



covers | PMMA [polymethylmethacrylat]
for 12 mm profiles

	clear	mat	milky	
				
1m	**983020**	**983022**	**983024**	**7,95 €**
2m	**983021**	**983023**	**983025**	**17,95 €**
3m	**983028**	**983027**	**983026**	**25,95 €**







With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg



profiles for outdoor use


Outdoor areas have different requirements than indoor areas. Our IP profiles are walkable and passable and inspire as a highlight in any outdoor design.


AU-04-12

IP-profile | walkable | 12 mm
for LED stripes up to 12,3 mm width



item	colour	dimensions L	price
970723	aluminium anodized	2m	**23,95 €**
970724	aluminium anodized	3m	**35,95 €**



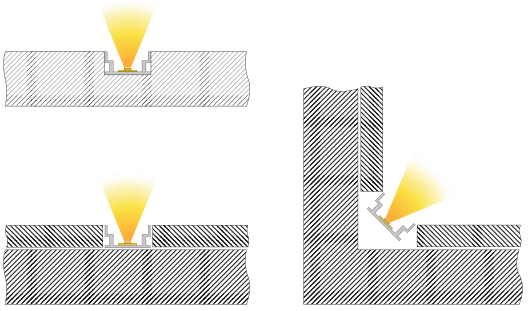



covers | Makrolon [polycarbonate]
for 12 mm profiles
walkable | material strength: 4mm
optimum light diffusion | extremely impact resistant

	clear	mat	milky	
				
2m			**988025**	**19,95 €**
3m			**988028**	**28,95 €**

end caps set | 2 pieces **4,95 €**
for 12 mm profiles




grey **981001**

! With professional processing, a protection class of up to IP65 can be achieved.

930104 natural stone sealant | 310ml cartridge
transparent | for adhesion of cover **39,95 €**



930103 sealant smoothing agent | 400ml tin
for clean stripping and to improve the surface of the sealant **39,95 €**





ET-05-12

IP-built-in-profile | walkable | 12 mm
for LED stripes up to 12,3 mm width



item	colour	dimensions L	price
975723	aluminium anodized	2m	**23,95 €**
975724	aluminium anodized	3m	**35,95 €**



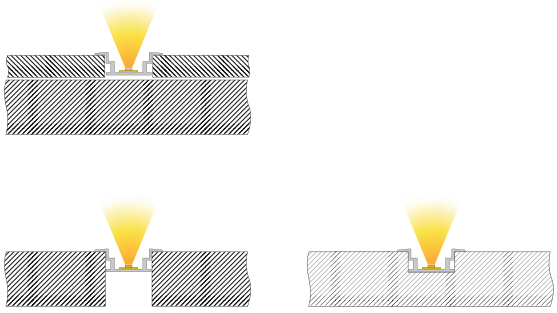



With the kind support of Oktec, Eislingen

covers | Makrolon [polycarbonate]
for 12 mm profiles
walkable | material strength: 4mm
optimum light diffusion | extremely impact resistant

	clear	mat	milky	
2m			**988025**	**19,95 €**
3m			**988028**	**28,95 €**

end caps set | 2 pieces **4,95 €**
for 12 mm profiles



grey **981011**

! With professional processing, a protection class of up to IP65 can be achieved.

930104 natural stone sealant | 310ml cartridge
transparent | for adhesion of cover **39,95 €**



930103 sealant smoothing agent | 400ml tin
for clean stripping and to improve the surface of the sealant **39,95 €**





AU-05-15

IP-profile | walkable | 15 mm
for LED stripes up to 15,6 mm width



item	colour	dimensions L	price
970741	aluminium natural	2m	**42,95 €**



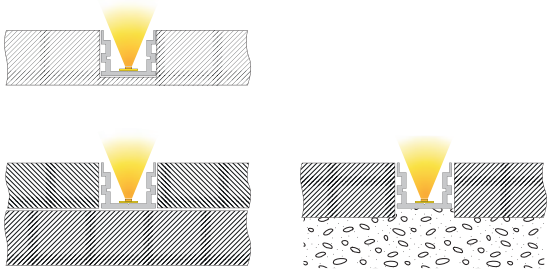



With the kind support of Elektro Grün, Neustadt an der Weinstraße

covers | Makrolon [polycarbonate]
for 15 mm profiles
walkable | material strength: 4mm
optimum light diffusion | extremely impact resistant


	clear	mat	milky
1m			**988084** **11,50 €**
2m			**988085** **21,95 €**

end caps set | 2 pieces **4,95 €**
for 15 mm profiles




grey **981031**

970764 carrier profile for LED stripes
aluminium natural | 1m
to reduce the insertion depth of the LED stripe
7,95 €





! With professional processing, a protection class of up to IP65 can be achieved.

930104 natural stone sealant | 310ml cartridge
transparent | for adhesion of cover
39,95 €



930103 sealant smoothing agent | 400ml tin
for clean stripping and to improve the surface of the sealant
39,95 €





ET-05-15

IP-built-in-T-profile | walkable | 15 mm
for LED stripes up to 15,6 mm width



item	colour	dimensions L	price
975741	aluminium natural	2m	**42,95 €**



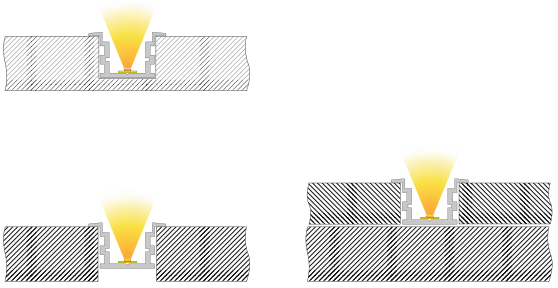




With the kind support of LED-TEC, Girlan/Italien | Foto: fotoeichhorn

covers | Makrolon [polycarbonate]
for 15 mm profiles
walkable | material strength: 4mm
optimum light diffusion | extremely impact resistant


	clear	mat	milky	
1m			**988084**	**11,50 €**
2m			**988085**	**21,95 €**


end caps set | 2 pieces **4,95 €**
for 15 mm profiles



grey **981041**

970764 carrier profile for LED stripes
aluminium natural | 1m
to reduce the insertion depth of the LED stripe
7,95 €





With professional processing, a protection class of up to IP65 can be achieved.

930104 natural stone sealant | 310ml cartridge
transparent | for adhesion of cover
39,95 €



930103 sealant smoothing agent | 400ml tin
for clean stripping and to improve the surface of the sealant
39,95 €





EU-01-12

IP-built-in-profile | passable | 12 mm
for LED stripes up to 12 mm width



item	colour	dimensions L	price
975781	aluminium natural	2m	**79,95 €**




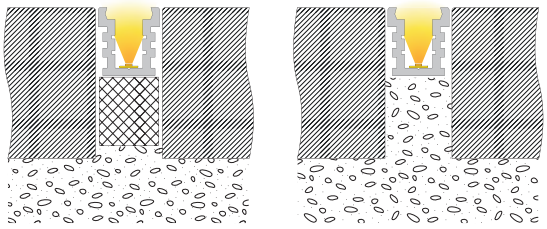

covers | Makrolon [polycarbonate]
for 12 mm profiles
passable | material strength: 5mm
optimum light diffusion | extremely impact resistant


	clear	mat	milky
1m		**988054**	**11,50 €**
2m		**988055**	**21,95 €**

end caps set | 2 pieces **4,95 €**
for 12 mm profiles



grey **981021**

970762 carrier profile for LED stripes
aluminium natural | 1,25m
to reduce the insertion depth of the LED stripe
7,95 €





990109 foam support | 123,5 x 3,3 x 3 cm
plastic | hard foam
for relining the profile
7,95 €



! With professional processing, a protection class of up to IP65 can be achieved.
Can be driven over with a maximum load of 1 tonne. We recommend our matching foam underlay.

930104 natural stone sealant | 310ml cartridge
transparent | for adhesion of cover
39,95 €



930103 sealant smoothing agent | 400ml tin
for clean stripping and to improve the surface of the sealant
39,95 €





LED STRIPES

630 LED stripes | overview
632 technical information
634 quick finder
638 COB | 1CH / 2CH / 3CH | 24V
646 standard | 1CH | 12V / 24V / 48V
656 standard | 2CH | 12V / 24V
662 standard | 3CH | 24V
666 standard | 4CH | 24V
670 D FLEX LINE top-view | 1CH / 3CH / 4CH | 24V
678 D FLEX LINE side-view | 1CH / 4CH | 24V
684 230V | 1CH



WW NW

COB stripes
1CH | 24V
from page 638



WW CW

COB stripes
2CH | 24V
from page 642



RGB

COB stripes
3CH | 24V
from page 644



WW NW CW

standard stripes
1CH | 12V
from page 646



WW NW CW

standard stripes
1CH | 24V
from page 648



WW NW

standard stripes
1CH | 48V
from page 654



WW CW

standard stripes
2CH | 12V
from page 656



WW CW

standard stripes
2CH | 24V
from page 658



RGB

standard stripes
3CH | 24V
from page 662



RGB WW NW

standard stripes
4CH | 24V
from page 666

LED stripes



WW

D FLEX LINE TOP-VIEW
1CH | 24V
from page 671



RGB

D FLEX LINE TOP-VIEW
3CH | 24V
page 675



RGB WW

D FLEX LINE TOP-VIEW
4CH | 24V
page 677



WW

D FLEX LINE SIDE-VIEW
1CH | 24V
from page 679



RGB WW

D FLEX LINE SIDE-VIEW
4CH | 24V
page 683



WW NW


230V stripes
1CH
page 685

THINGS TO KNOW ABOUT LED STRIPES

Which LED chips and sizes are most commonly installed in our company?
On these two pages, we focus on LED stripes, or more precisely on the LED chips installed on them. These are installed in a wide variety of sizes, power classes, quantities and distances for a wide variety of stripes in 12V, 24V, 48V and 230V.

quality promise
Our LED stripes are subjected to constant quality control during production. Thus, we can guarantee the high quality of our LED stripes.


STRUCTURE OF A STANDARD LED CHIP

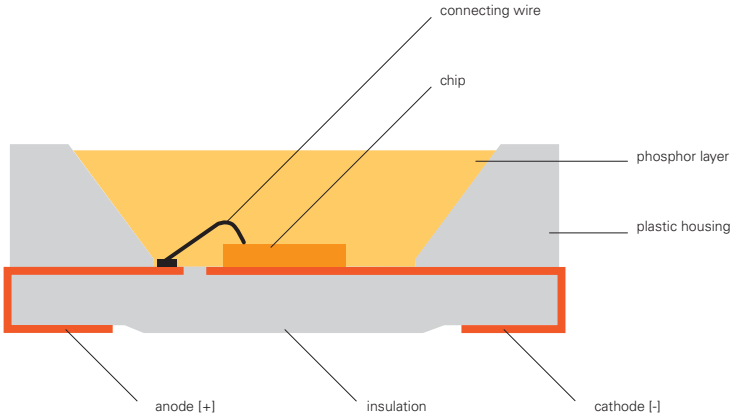


WHAT DO THE NUMBERS MEAN FOR A LED STRIPE?

The numbers clearly indicate the size [width and length] and shape of the LED chips installed on a carrier [stripe]. For example, the LED chip 5050 – one of the world's most frequently used LED chips – has a width of LED chips – each with a length and width of 5 mm. A 2835 LED chip therefore has a width of 2.8 mm and a length of 3.5 mm.


SMD 5050 | single
chip dimensions: 5 x 5 mm

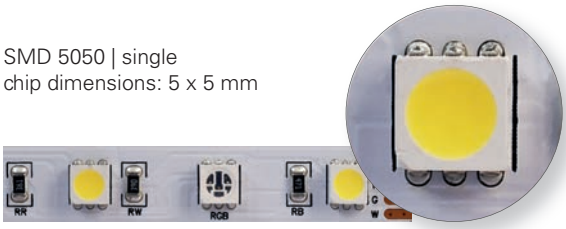

SMD 2835 | single
chip dimensions: 2,8 x 3,5 mm

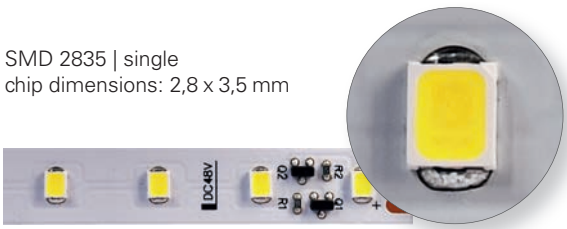


SMD 5050 | RGB
chip dimensions: 5 x 5 mm

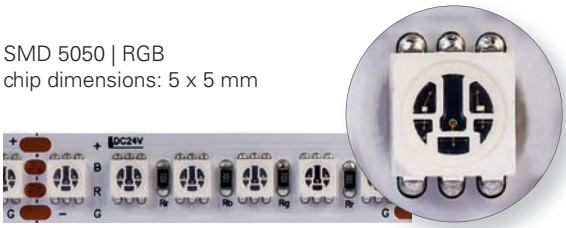

SMD 2835 | WW / CW
chip dimensions: 2,8 x 3,5 mm




SMD 5050 | WW / CW
chip dimensions: 5 x 5 mm

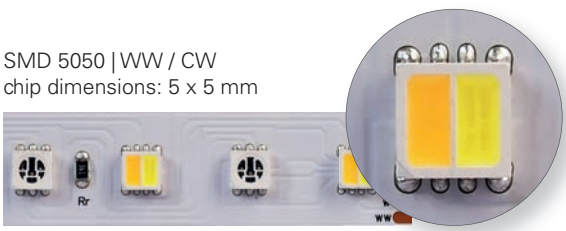


SMD 2216 | single
chip dimensions: 1,6 x 2,2 mm




SMD 3528 | single
chip dimensions: 2,8 x 3,5 mm

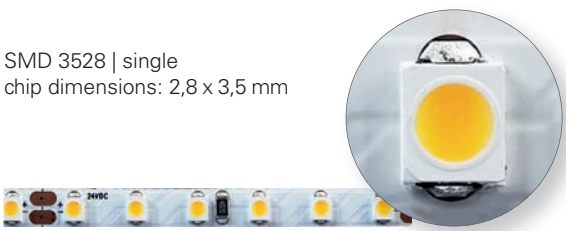

SMD 1808 | single
chip dimensions: 0,8 x 1,8 mm

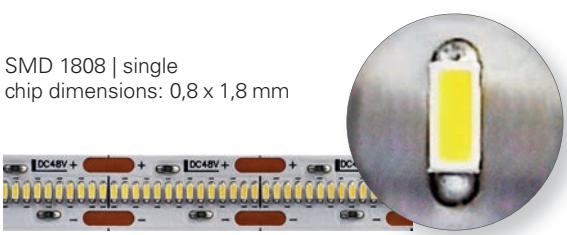

COB | single

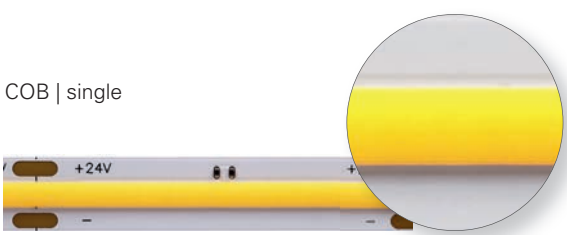

width in mm	voltage [DC]	W / m	type	light colour	colour temperature	lm / m	LED / m	length in mm	protection class	item number	page
4,0	24V	11,0	standard	WW	2700K	995	266	5000	IP20	840175	650
4,0	24V	11,0	standard	WW	3000K	1090	266	5000	IP20	840210	650
4,0	24V	11,5	standard	NW	4000K	1100	266	5000	IP20	840267	650
5,0	24V	8,5	standard	WW	2700K	680	120	5000	IP20	840158	649
5,0	24V	10,5	standard	WW	3000K	730	120	5000	IP20	840159	649
5,0	24V	11,0	standard	RGB		500	120	5000	IP20	840276	663
6,5	24V	9,5	D FLEX side view	WW	3000K	287	120	5000	IP44	840376	679
7,0	24V	8,0	D FLEX side view	WW	3000K	295	120	5000	IP68	840283	680
7,0	24V	12,5	standard	WW CW	3000-6500K	1070	196	5000	IP67	840349	660
8,0	12V	6,5	standard	WW	3000K	555	120	5000	IP20	840165	647
8,0	12V	7,0	standard	WW	2700K	570	120	5000	IP20	840164	647
8,0	12V	7,0	standard	CW	6500K	630	120	5000	IP20	840167	647
8,0	12V	7,0	standard	NW	4000K	670	120	5000	IP20	840166	647
8,0	12V	10,0	standard	WW CW	3000-6500K	760	120	5000	IP20	840097	657
8,0	24V	11,0	standard	WW CW	3000-6500K	1025	196	5000	IP20	840350	659
8,0	24V	13,5	standard	WW	3000K	1100	180	5000	IP20	840179	650
8,0	24V	13,5	standard	WW	3000K	1100	180	50000	IP20	930512	650
8,0	24V	13,5	standard	NW	4000K	1220	180	5000	IP20	840180	650
8,0	24V	13,5	standard	NW	4000K	1225	180	50000	IP20	930513	650
8,0	24V	14,0	standard	WW	2700K	1110	180	5000	IP20	840178	650
9,5	24V	10,0	D FLEX top view	RGB		315	120	5000	IP68	840286	675
9,5	24V	10,5	D FLEX top view	WW	3000K	730	144	5000	IP68	840285	671
10,0	24V	17,2	standard	WW CW	2700-6500K	1765	140	5000	IP20	840378	659
10,0	24V	14,0	standard	WW CW	2700-6500K	1470	140	5000	IP44	840379	660
10,0	48V	4,0	standard	WW	3000K	400	78	15000	IP44	840317	655
10,0	48V	4,0	standard	WW	3000K	405	78	50000	IP44	840338	655
10,0	48V	4,0	standard	NW	4000K	455	78	15000	IP44	840319	655
10,0	48V	4,0	standard	NW	4000K	455	78	50000	IP44	840340	655

width in mm	voltage [DC]	W / m	type	light colour	colour temperature	lm / m	LED / m	length in mm	protection class	item number	page
10,0	48V	4,0	standard	WW	3000K	485	78	15000	IP20	840318	655
10,0	48V	4,0	standard	WW	3000K	485	78	50000	IP20	840337	655
10,0	48V	4,0	standard	NW	4000K	530	78	15000	IP20	840320	655
10,0	48V	4,0	standard	NW	4000K	530	78	50000	IP20	840339	655
10,0	24V	9,5	standard	WW	3000K	705	120	10000	IP20	840291	649
10,0	24V	10,5	COB	WW CW	2700-6500K	960	576	5000	IP20	840374	643
10,0	12V	10,5	standard	WW CW	3000-6500K	1025	120	5000	IP20	840142	657
10,0	24V	12,0	COB	NW	4000K	1130	480	5000	IP20	840304	639
10,0	24V	12,5	COB	WW	3000K	1120	480	5000	IP20	840296	639
10,0	24V	13,0	standard	RGB		580	60	5000	IP20	840254	663
10,0	24V	14,0	standard	RGB		665	96	5000	IP20	840147	664
10,0	24V	14,5	standard	RGB		665	96	50000	IP20	930516	664
10,0	24V	16,0	COB	WW	3000K	2230	480	5000	IP20	840323	639
10,0	24V	16,0	COB	NW	4000K	2565	480	5000	IP20	840324	639
10,0	24V	16,0	standard	RGB WW	3000K	820	60	5000	IP20	840236	667
10,0	24V	16,0	standard	RGB WW	3000K	820	60	50000	IP20	930517	667
10,0	24V	16,5	standard	RGB NW	4000K	775	60	5000	IP20	840353	668
10,0	24V	16,5	COB	RGB		660	840	5000	IP20	840375	645
10,0	24V	16,0	standard	RGB NW	4000K	765	60	5000	IP44	840373	669
10,0	24V	18,5	standard	WW	2700K	1215	240	5000	IP20	840192	651
10,0	24V	19,0	standard	WW	3000K	1605	240	5000	IP20	840193	651
10,0	24V	19,0	standard	WW	3000K	1605	240	50000	IP20	930514	651
10,0	24V	20,0	standard	NW	4000K	1770	240	5000	IP20	840194	651
10,0	24V	20,0	standard	NW	4000K	1770	240	50000	IP20	930515	651
10,0	24V	20,0	standard	CW	6000K	1720	120	5000	IP20	840124	652
10,0	24V	21,0	standard	WW	3000K	1595	120	5000	IP20	840122	652
10,0	24V	22,5	standard	WW	3000K	2520	160	5000	IP44	840333	653
10,0	24V	22,5	standard	NW	4000K	2555	160	5000	IP44	840334	653

width in mm	voltage [DC]	W / m	type	light colour	colour temperature	lm / m	LED / m	length in mm	protection class	item number	page
10,0	24V	22,5	standard	NW	4000K	2815	160	5000	IP20	840332	652
10,0	24V	22,5	standard	WW	3000K	2570	160	5000	IP20	840331	652
10,5	12V	7,0	standard	WW	2700K	550	120	5000	IP67	840172	647
10,5	24V	11,5	standard	WW	2700K	900	180	5000	IP67	840186	653
10,5	24V	11,0	standard	WW	3000K	930	180	5000	IP67	840187	653
12,0	24V	10,5	D FLEX side view	WW	3000K	368	144	5000	IP68	840287	681
12,0	24V	10,5	D FLEX side view	RGB WW	3200K	210	84	5000	IP68	840290	683
12,0	24V	14,0	standard	RGB WW	3000K	585	96	5000	IP20	840144	667
12,0	24V	22,0	standard	RGB WW	3000K	955	192	5000	IP20	840308	668
12,0	24V	22,0	standard	RGB NW	4000K	985	192	5000	IP20	840309	668
12,0	24V	27,5	standard	RGB		1045	120	5000	IP44	840351	665
12,0	24V	28,0	standard	RGB		1055	120	5000	IP20	840352	664
12,5	24V	12,5	standard	RGB		530	60	5000	IP67	840256	665
12,5	24V	15,0	COB	WW	3000K	2225	480	5000	IP67	840321	640
12,5	24V	15,0	COB	NW	4000K	2455	480	5000	IP67	840322	640
12,5	24V	15,0	standard	RGB WW	3000K	735	60	5000	IP67	840239	669
16,0	24V	10,5	D FLEX top view	RGB WW	3200K	320	84	5000	IP68	840289	677
16,5	24V	10,5	D FLEX top view	WW	3000K	515	144	5000	IP68	840288	673
17,2	230V	14,0		WW	2700K	1442	84	15000	IP65	840390	685
17,2	230V	14,0		WW	2700K	1442	84	50000	IP65	840391	685
17,2	230V	14,0		WW	3000K	1470	84	15000	IP65	840386	685
17,2	230V	14,0		WW	3000K	1470	84	50000	IP65	840387	685
17,2	230V	14,0		NW	4000K	1596	84	15000	IP65	840388	685
17,2	230V	14,0		NW	4000K	1596	84	50000	IP65	840389	685

quick finder sorted in ascending order by width and performance




Foto: Daniel Vieser . Architekturfotografie, Karlsruhe


COB | 1CH | 24V

COB stripes in warm white 3000K und neutral white 4000K These LED stripes are ideal when the focus is on a homogeneous light pattern.



COB-480-24V-3000K / 4000K-5M

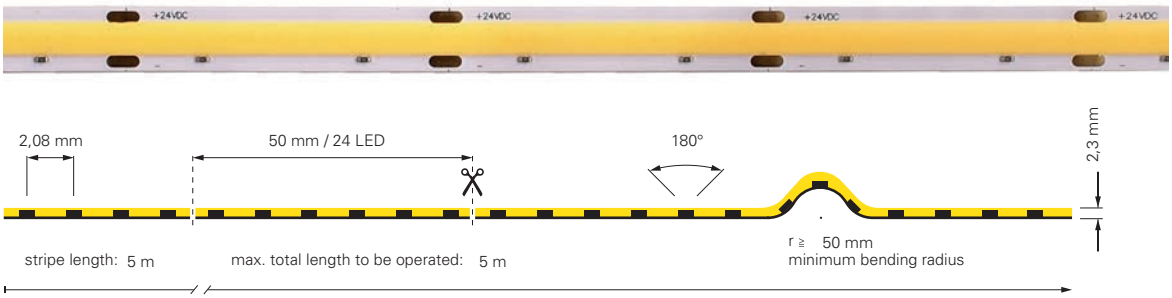


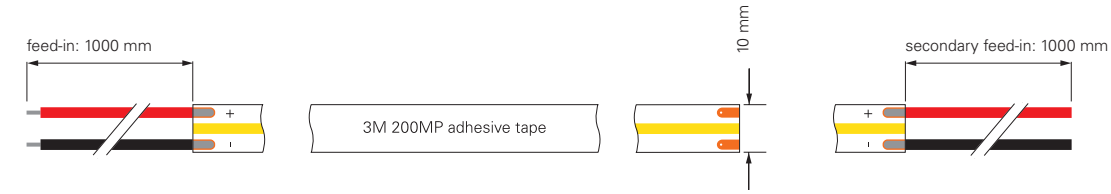


item	colour temperature		efficiency	light current	dimensions L	power	light source	price
840296	WW	3000K	90 lm/W	1120 lm/m	5000 mm	12,5 W/m	480 LED/m	**179,95 €**
840304	NW	4000K	94 lm/W	1130 lm/m	5000 mm	12,0 W/m	480 LED/m	**179,95 €**

CV | 24 Volt | COB | Ra 90 | 1 CH | IP20 | - 15°C + 50°C

COB-480-24V-3000K / 4000K-5M

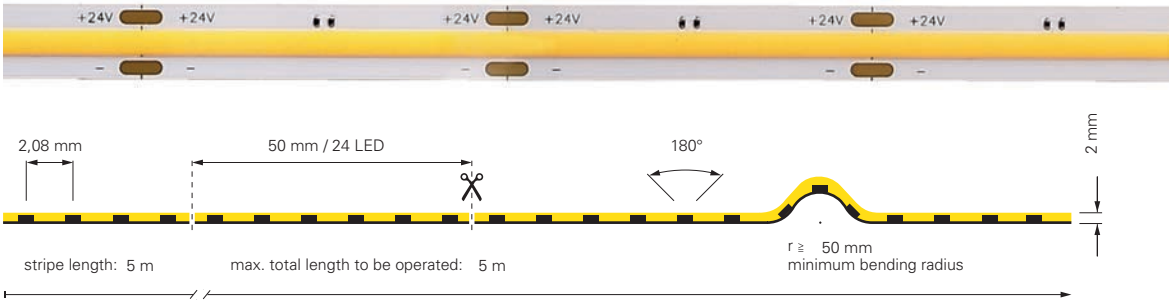

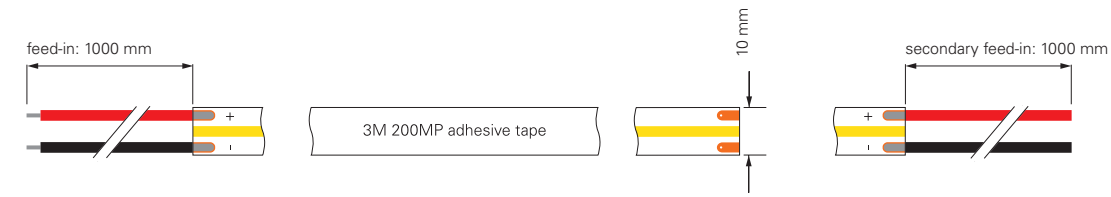



item	colour temperature		efficiency	light current	dimensions L	power	light source	price
840323	WW	3000K	139 lm/W	2230 lm/m	5000 mm	16 W/m	480 LED/m	**199,95 €**
840324	NW	4000K	160 lm/W	2565 lm/m	5000 mm	16 W/m	480 LED/m	**199,95 €**

CV | 24 Volt | COB | Ra 90 | 1 CH | IP20 | - 15°C + 50°C


COB-480-24V-3000K / 4000K-5M-SILIKON



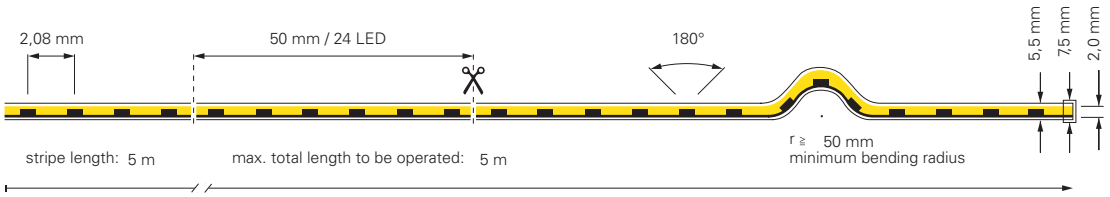

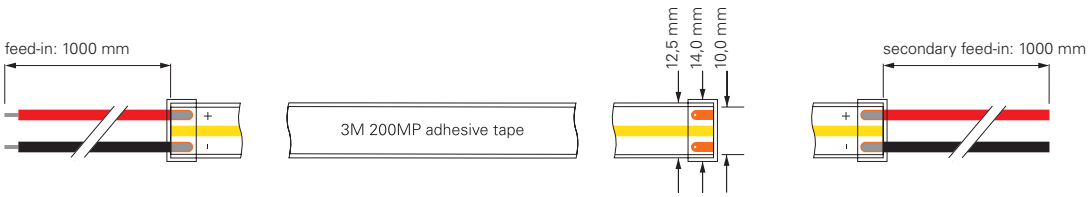

item	colour temperature		efficiency	light current	dimensions L	power	light source	price
840321	WW	3000K	148 lm/W	2225 lm/m	5000 mm	15 W/m	480 LED/m	**229,95 €**
840322	NW	4000K	164 lm/W	2455 lm/m	5000 mm	15 W/m	480 LED/m	**229,95 €**



incl. accessories: 10x retaining bracket, 20x stainless steel screw, 2x endcap



Foto: Daniel Vieser . Architekturfotografie, Karlsruhe

COB | 2CH | 24V

COB stripe in warm white 2700K – cold white 6500K
These LED stripes are ideal when the focus is on a homogeneous light pattern. With these COB stripes, you have the option of mixing white tones between 2700K and 6500K through flexible control.











COB-576-24V-2700-6500K-5M



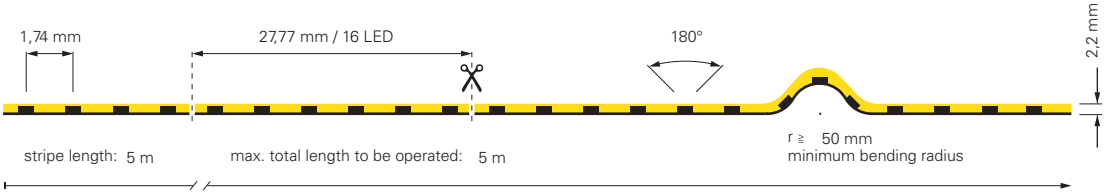

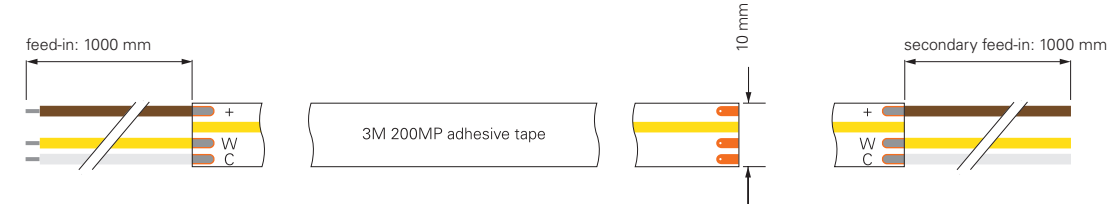

item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840374	WW CW 2700-6500K	91 lm/W	960 lm/m	5000 mm	10,5 W/m	576 LED/m	**339,95 €**

CV | 24 Volt | COB | Ra 90 | + − | 2 CH | IP20 | - 15°C + 50°C


COB | 3CH | 24V

COB stripe in RGB
These LED stripes are ideal when the focus is on a homogeneous light pattern. With these COB stripes, you have the option of setting individual colours or mixed colours as desired through flexible control.








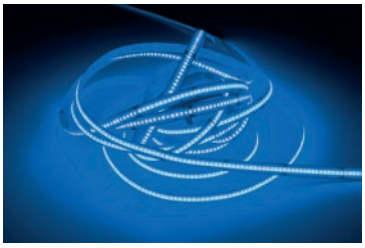


COB-840-24V-RGB-5M



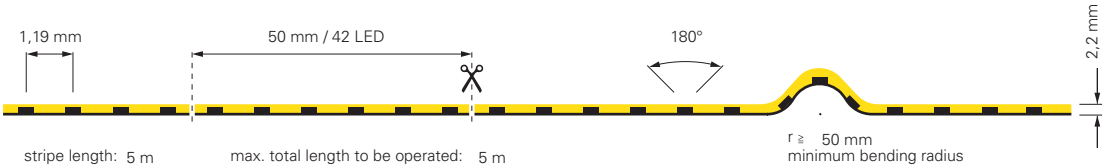

stripe length: 5 m

max. total length to be operated: 5 m

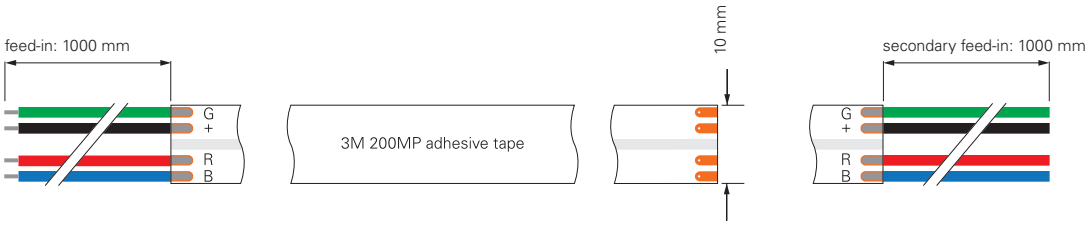

item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840375	RGB 460-620 nm	40 lm/W	660 lm/m	5000 mm	16,5 W/m	840 LED/m	**449,95 €**

CV | 24 Volt | COB | + − | 3 CH | IP20 | - 15°C + 50°C


STANDARD | 1CH | 12V


LED stripes in warm white 2700K + 3000K,
neutral white 4000K and cold white 6500K
These LED stripes are ideally suited for all standard applications and special assemblies with the most diverse requirements. With voltages of 12V, different protection classes, lumens, number of LEDs, power and much more, you will find the right LED stripe for your application.




3528-120-12V-2700K / 3000K / 4000K / 6500K-5M



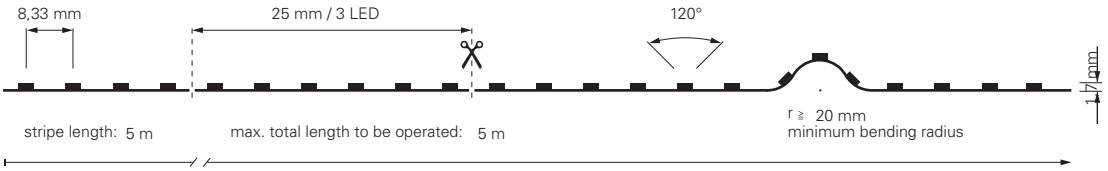

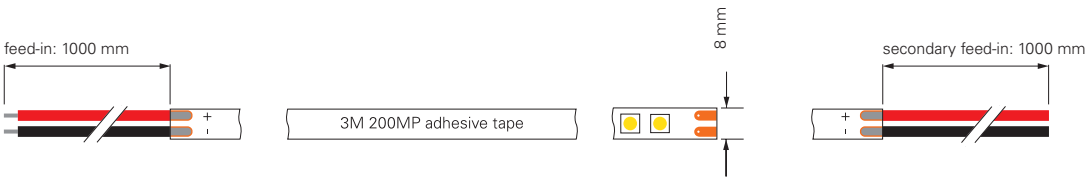



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840164	WW 2700K	81 lm/W	570 lm/m	5000 mm	7,0 W/m	120 LED/m	**99,95 €**
840165	WW 3000K	85 lm/W	555 lm/m	5000 mm	6,5 W/m	120 LED/m	**99,95 €**
840166	NW 4000K	96 lm/W	670 lm/m	5000 mm	7,0 W/m	120 LED/m	**99,95 €**
840167	CW 6500K	90 lm/W	630 lm/m	5000 mm	7,0 W/m	120 LED/m	**99,95 €**




3528-120-12V-2700K-5M-SILIKON



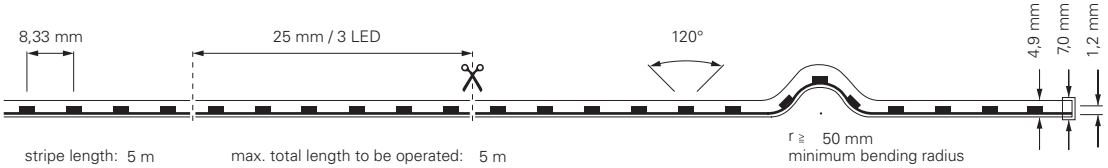

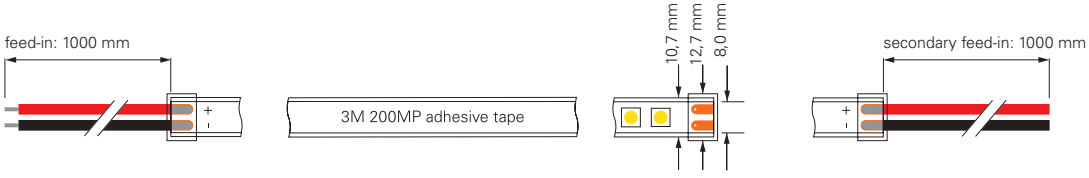

item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840172	WW 2700K	79 lm/W	550 lm/m	5000 mm	7 W/m	120 LED/m	**159,95 €**




incl. accessories: 10x retaining bracket, 20x stainless steel screw, 2x endcap


STANDARD | 1CH | 24V

LED stripes in warm white 2700K + 3000K,
neutral white 4000K and cold white 6500K
These LED stripes are ideally suited for all standard applications and special assemblies with the most diverse requirements. With voltages of 24V, different protection classes, lumens, number of LEDs, power and much more, you will find the right LED stripe for your application.



3528-120-24V-2700K / 3000K-5M

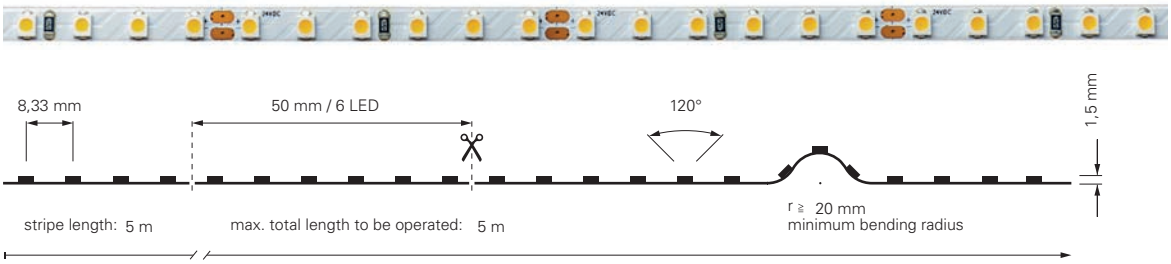

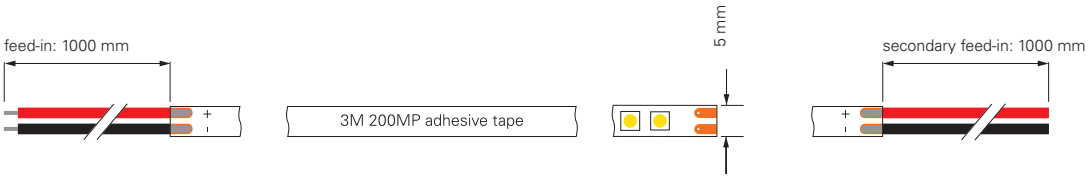



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840158	ww 2700K	80 lm/W	680 lm/m	5000 mm	8,5 W/m	120 LED/m	**89,95 €**
840159	ww 3000K	70 lm/W	730 lm/m	5000 mm	10,5 W/m	120 LED/m	**89,95 €**

CV | 24 Volt | SMD 3528 | Ra 90 | 1 CH | IP20 | - 15°C + 50°C

2835-120-24V-3000K-10M



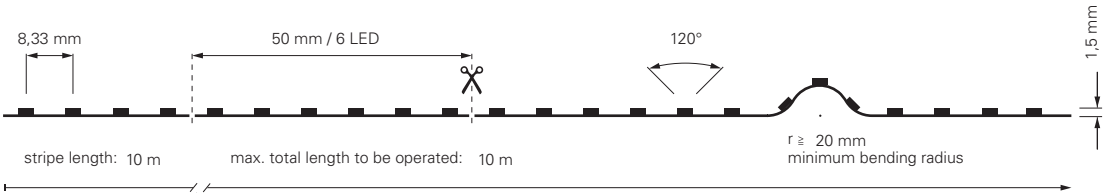


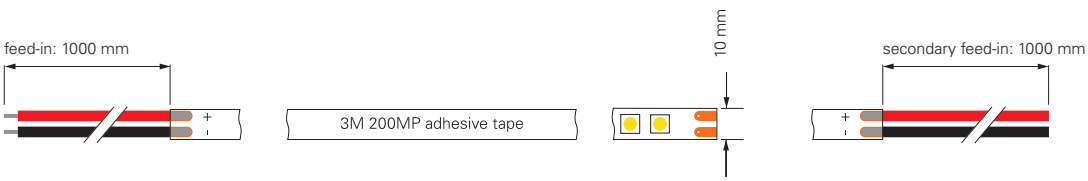


item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840291	ww 3000K	74 lm/W	705 lm/m	10000 mm	9,5 W/m	120 LED/m	**449,95 €**

CV | 24 Volt | SMD 2835 | Ra 90 | 1 CH | IP20 | - 15°C + 50°C

2216-266-24V-2700K / 3000K / 4000K-5M

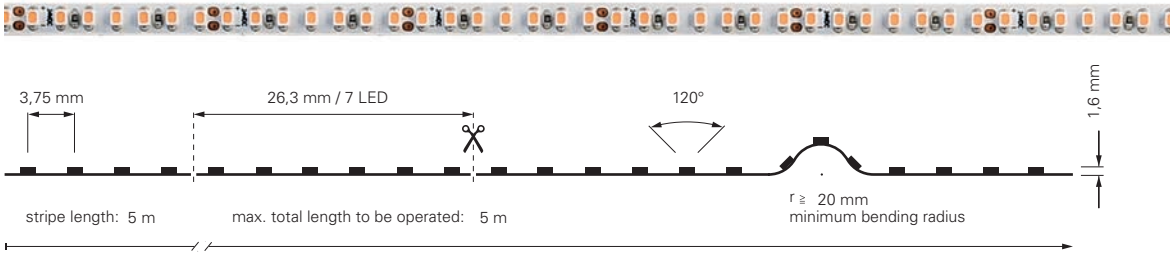

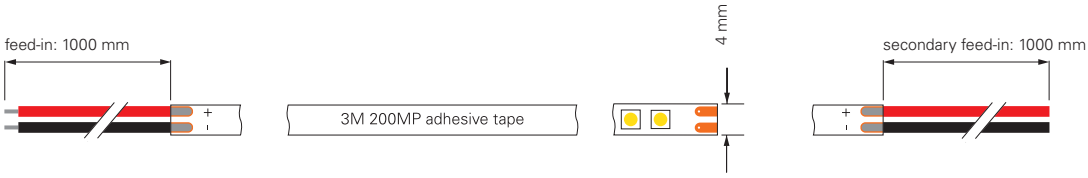



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840175	WW 2700K	90 lm/W	995 lm/m	5000 mm	11,0 W/m	266 LED/m	**189,95 €**
840210	WW 3000K	99 lm/W	1090 lm/m	5000 mm	11,0 W/m	266 LED/m	**189,95 €**
840267	NW 4000K	96 lm/W	1100 lm/m	5000 mm	11,5 W/m	266 LED/m	**189,95 €**

CV | 24 Volt | SMD 2216 | Ra 90 | + − | 1 CH | IP20 | - 15°C + 50°C

3528-180-24V-2700K-5M / 3000K-5M / 3000K-50M / 4000K-5M / 4000K-50M



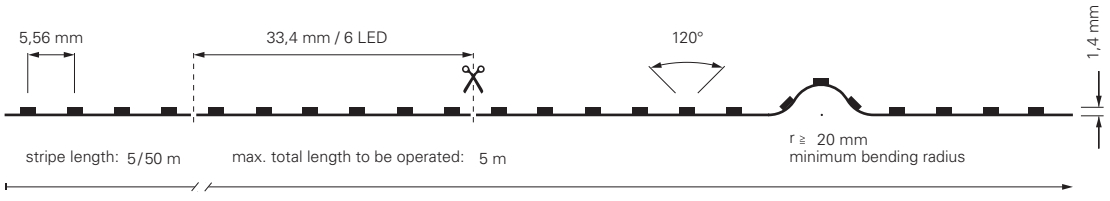

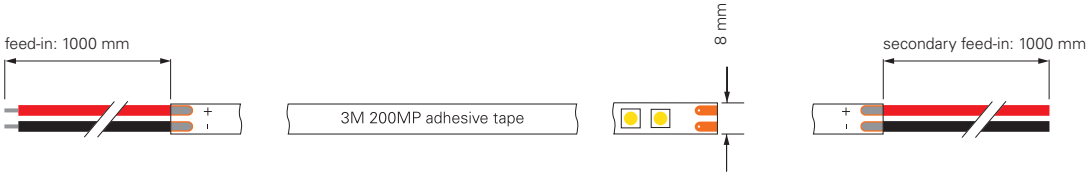



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840178	WW 2700K	79 lm/W	1110 lm/m	5000 mm	14,0 W/m	180 LED/m	**139,95 €**
840179	WW 3000K	81 lm/W	1100 lm/m	5000 mm	13,5 W/m	180 LED/m	**139,95 €**
930512	WW 3000K	81 lm/W	1100 lm/m	50000 mm	13,5 W/m	180 LED/m	**1.299,95 €**
840180	NW 4000K	90 lm/W	1220 lm/m	5000 mm	13,5 W/m	180 LED/m	**139,95 €**
930513	NW 4000K	91 lm/W	1225 lm/m	50000 mm	13.5 W/m	180 LED/m	**1.299,95 €**

CV | 24 Volt | SMD 3528 | Ra 90 | + − | 1 CH | IP20 | - 15°C + 50°C


3528-240-24V-2700K-5M / 3000K-5M / 3000K-50M / 4000K-5M / 4000K-50M



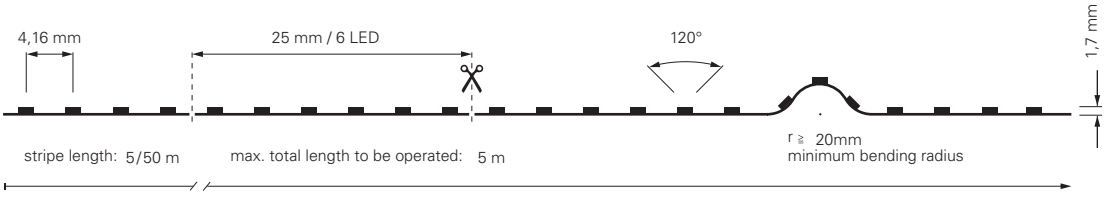

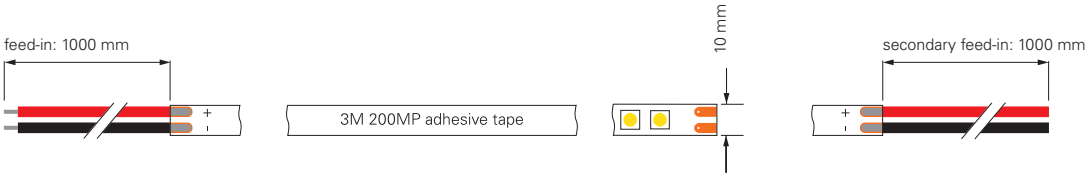



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840192	WW 2700K	66 lm/W	1215 lm/m	5000 mm	18,5 W/m	240 LED/m	**181,95 €**
840193	WW 3000K	84 lm/W	1605 lm/m	5000 mm	19,0 W/m	240 LED/m	**181,95 €**
930514	WW 3000K	84 lm/W	1605 lm/m	50000 mm	19,0 W/m	240 LED/m	**1.629,95 €**
840194	NW 4000K	89 lm/W	1770 lm/m	5000 mm	20,0 W/m	240 LED/m	**181,95 €**
930515	NW 4000K	89 lm/W	1770 lm/m	50000 mm	20,0 W/m	240 LED/m	**1.629,95 €**



2835-120-24V-3000K / 6000K-5M



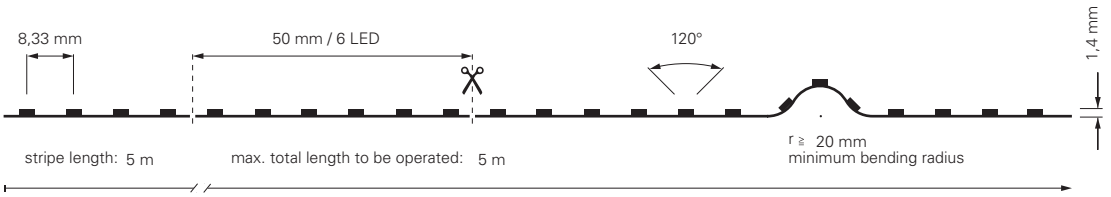

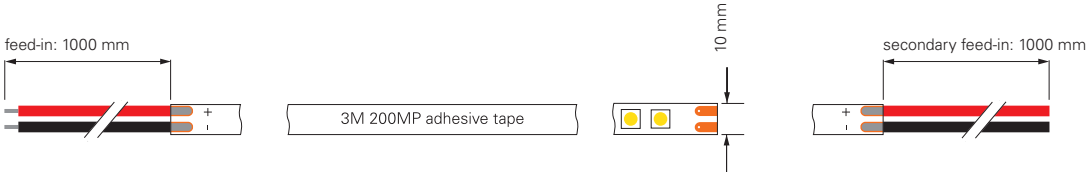



item	colour temperature		efficiency	light current	dimensions L	power	light source	price
840122	WW	3000K	76 lm/W	1595 lm/m	5000 mm	21 W/m	120 LED/m	**215,95 €**
840124	CW	6000K	86 lm/W	1720 lm/m	5000 mm	20 W/m	120 LED/m	**215,95 €**

CV | 24 Volt | SMD 2835 | Ra 95 | 1 CH | IP20 | - 15°C + 50°C

2835-160-24V-3000K / 4000K-5M



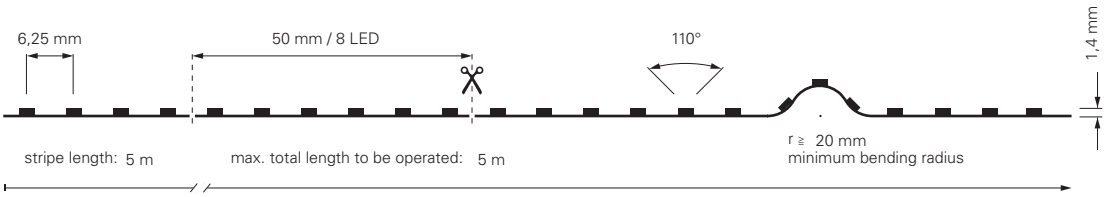

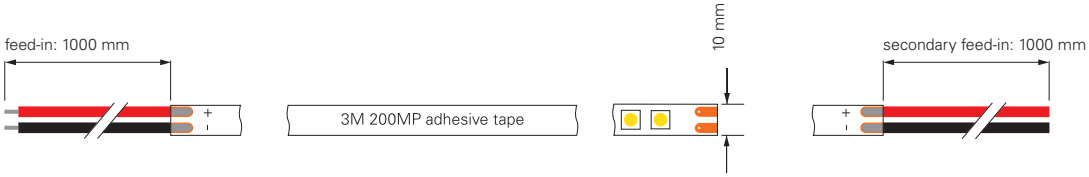



item	colour temperature		efficiency	light current	dimensions L	power	light source	price
840331	WW	3000K	114 lm/W	2570 lm/m	5000 mm	22,5 W/m	160 LED/m	**279,95 €**
840332	NW	4000K	125 lm/W	2815 lm/m	5000 mm	22,5 W/m	160 LED/m	**279,95 €**

CV | 24 Volt | SMD 2835 | Ra 90 | 1 CH | IP20 | - 15°C + 50°C

2835-160-24V-3000K / 4000K-5M-SILIKON



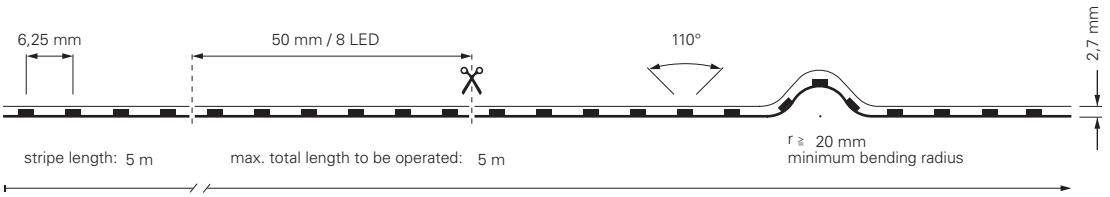

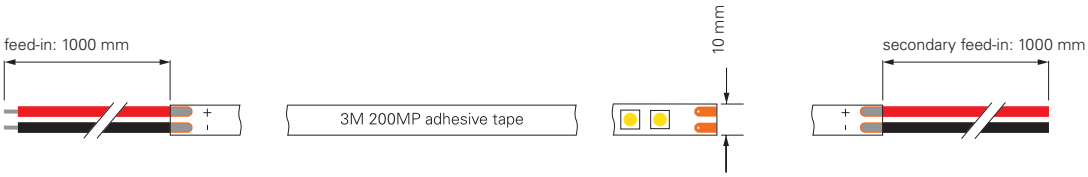



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840333	WW 3000K	112 lm/W	2520 lm/m	5000 mm	22,5 W/m	160 LED/m	**289,95 €**
840334	NW 4000K	114 lm/W	2555 lm/m	5000 mm	22,5 W/m	160 LED/m	**289,95 €**

CV | 24 Volt | SMD 2835 | Ra 90 | 1 CH | IP44 | - 15°C + 50°C

3528-180-24V-2700K / 3000K-5M-SILIKON



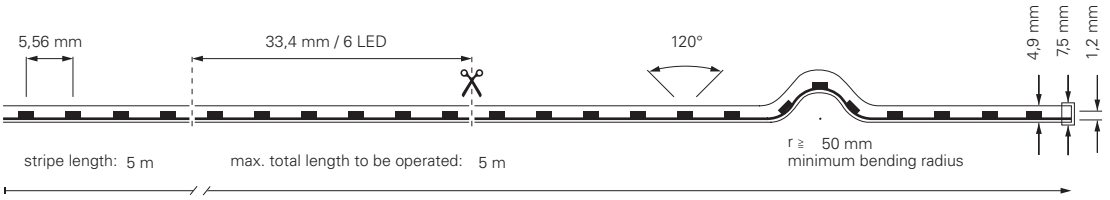

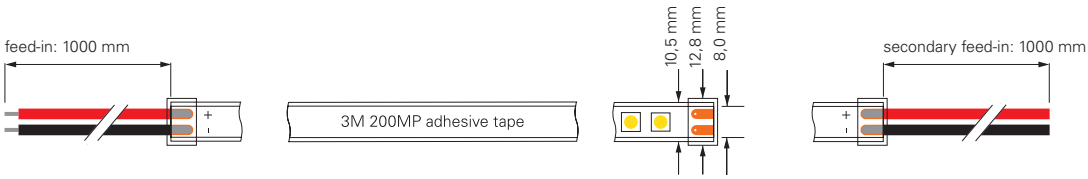

item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840186	WW 2700K	78 lm/W	900 lm/m	5000 mm	11,5 W/m	180 LED/m	**205,95 €**
840187	WW 3000K	85 lm/W	930 lm/m	5000 mm	11,0 W/m	180 LED/m	**205,95 €**

CV | 24 Volt | SMD 3528 | Ra 90 | 1 CH | IP67 | - 15°C + 50°C

incl. accessories: 10x retaining bracket, 20x stainless steel screw, 2x endcap


STANDARD | 1CH | 48V


48V LED stripes in warm white 3000K, neutral white 4000K These LED stripes are ideally suited when the focus is on long distances to be illuminated. Due to the voltage of 48V, distances of up to 50m can be operated at a stretch.



2835-78-48V-3000K-15M / 3000K-50M / 4000K-15M / 4000K-50M



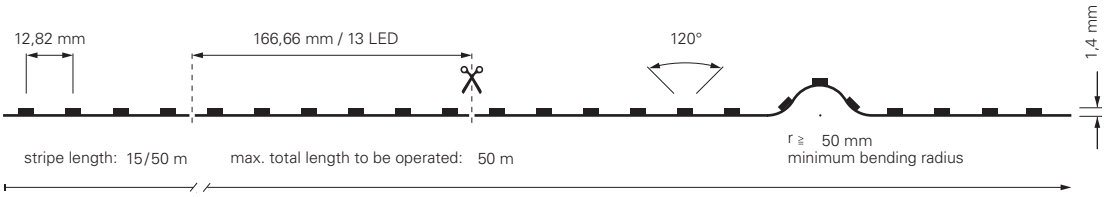

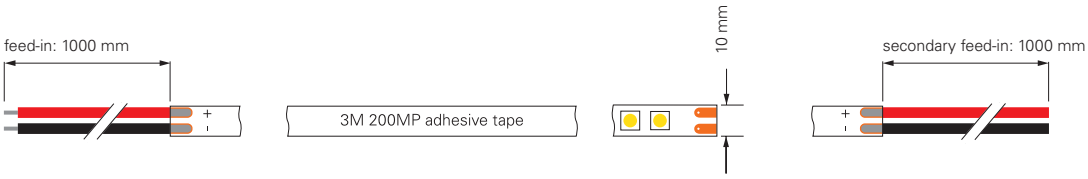



item	colour temperature		efficiency	light current	dimensions L	power	light source	price
840318	WW	3000K	121 lm/W	485 lm/m	15000 mm	4 W/m	78 LED/m	**489,95 €**
840337	WW	3000K	121 lm/W	485 lm/m	50000 mm	4 W/m	78 LED/m	**1.499,95 €**
840320	NW	4000K	133 lm/W	530 lm/m	15000 mm	4 W/m	78 LED/m	**499,95 €**
840339	NW	4000K	133 lm/W	530 lm/m	50000 mm	4 W/m	78 LED/m	**1.525,95 €**

CV | 48 Volt | SMD 2835 | Ra 80 | 1 CH | IP20 | - 15°C + 50°C

2835-78-48V-3000K-15M / 3000K-50M / 4000K-15M / 4000K-50M-SILIKON



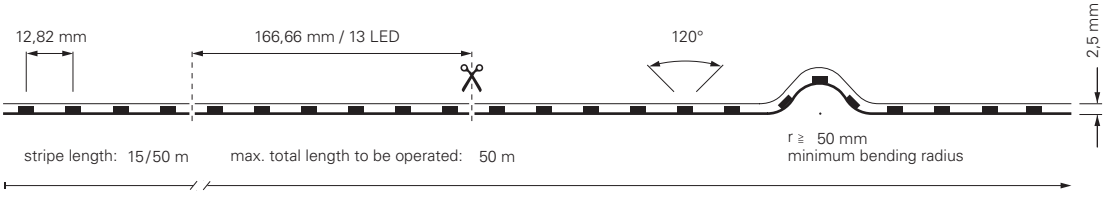

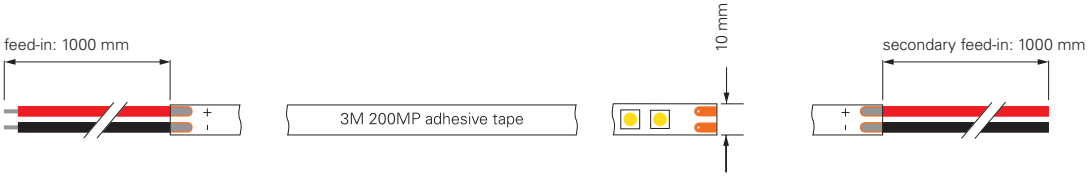

item	colour temperature		efficiency	light current	dimensions L	power	light source	price
840317	WW	3000K	100 lm/W	400 lm/m	15000 mm	4 W/m	78 LED/m	**549,95 €**
840338	WW	3000K	100 lm/W	400 lm/m	50000 mm	4 W/m	78 LED/m	**1.725,95 €**
840319	NW	4000K	114 lm/W	455 lm/m	15000 mm	4 W/m	78 LED/m	**549,95 €**
840340	NW	4000K	114 lm/W	455 lm/m	50000 mm	4 W/m	78 LED/m	**1.799,95 €**

CV | 48 Volt | SMD 2835 | Ra 80 | 1 CH | IP44 | - 15°C + 50°C


STANDARD | 2CH | 12V


standard stripes in warm white 2700K - cold white 6500K,
warm white 3000K - cold white 6500K
With these standard stripes you have the possibility to mix white tones between 2700K and 6500K / 3000K and 6500K through a flexible control.



3528-120-12V-3000K+6500K-5M



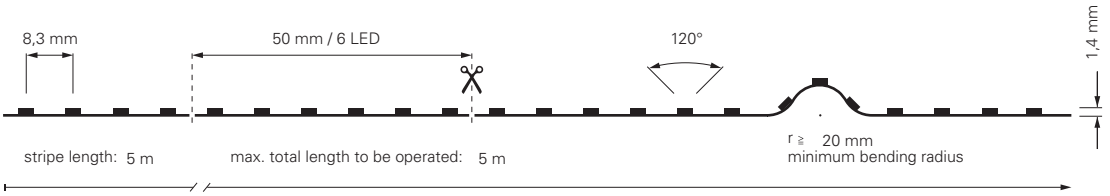

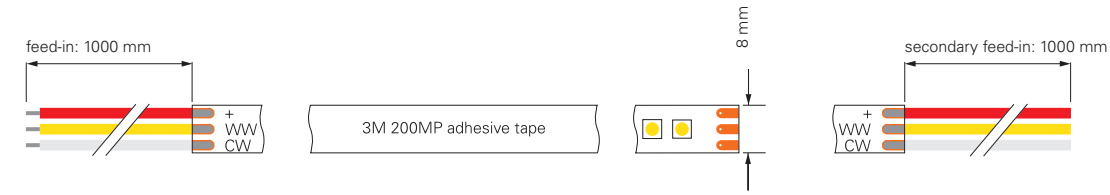



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840097	ww cw 3000-6500K	76 lm/W	760 lm/m	5000 mm	10 W/m	120 LED/m	**139,95 €**

CV | 12 Volt | SMD 3528 | Ra 90 | + − | 2 CH | IP20 | - 15°C + 50°C

3528-120-12V-3000K-6500K-5M



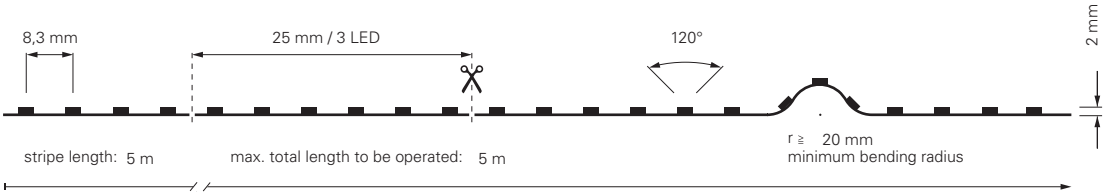

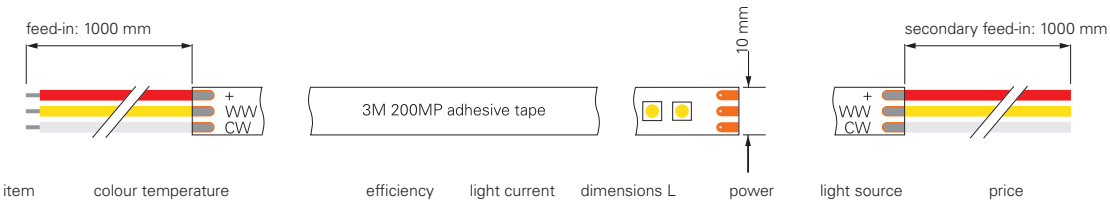

item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840142	ww cw 3000-6500K	98 lm/W	1025 lm/m	5000 mm	10,5 W/m	120 LED/m	**219,95 €**


CV | 12 Volt | SMD 3528 | Ra 80 | + − | 2 CH | IP20 | - 15°C + 50°C


STANDARD | 2CH | 24V

standard stripes in warm white 2700K - cold white 6500K, warm white 3000K - cold white 6500K
These LED stripes are ideally suited for all standard applications and special assemblies with the most diverse requirements. With these standard stripes, you have the option of mixing white tones between 2700K and 6500K /3000K and 6500K through flexible control.



2216-196-24V-3000-6500K-5M

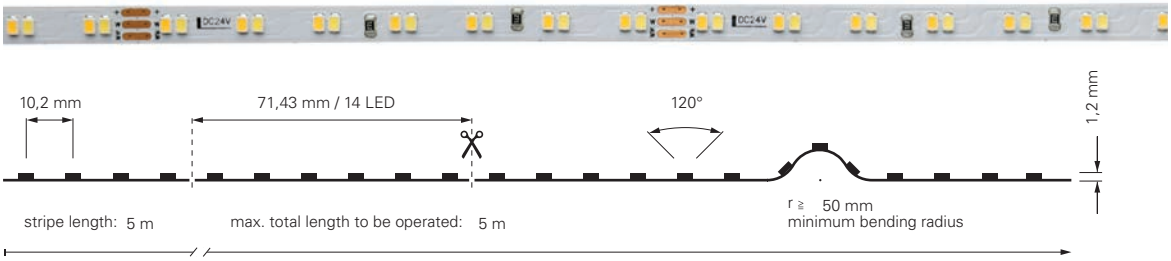


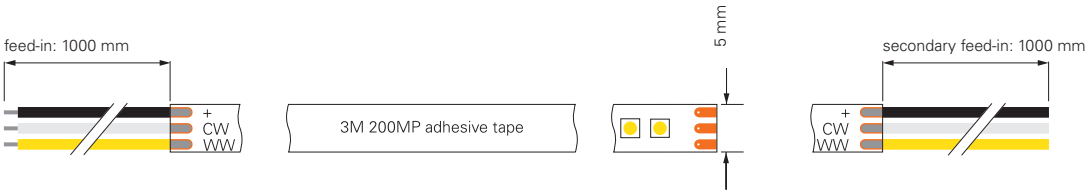



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840350	WW CW 3000-6500K	93 lm/W	1025 lm/m	5000 mm	11 W/m	196 LED/m	**139,95 €**

CV | 24 Volt | SMD 2216 | Ra 90 | + − | 2 CH | IP20 | - 15°C + 50°C

2835-120-24V-2700-6500K-5M

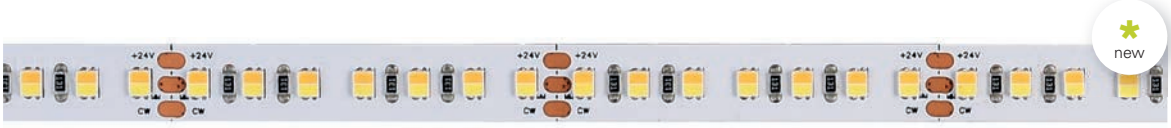

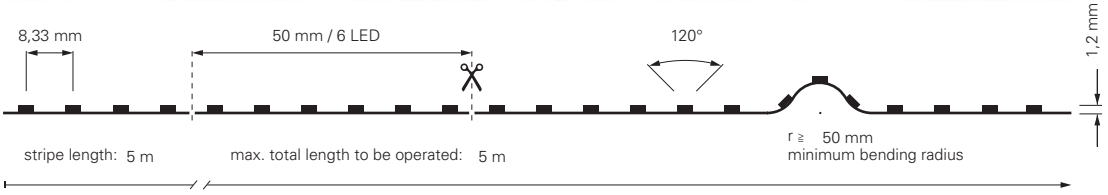

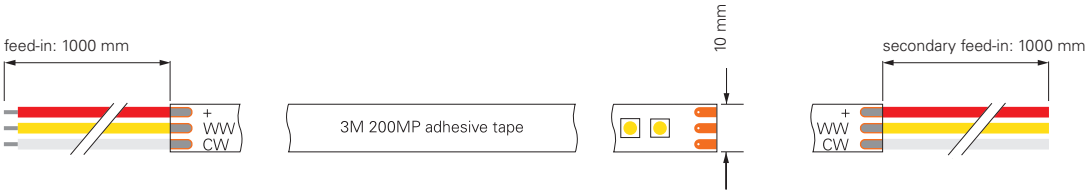


item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840378	WW CW 2700-6500K	103 lm/W	1765 lm/m	5000 mm	17,2 W/m	140 LED/m	**199,95 €**


CV | 24 Volt | SMD 2835 | Ra 90 | + − | 2 CH | IP20 | - 15°C + 50°C

2835-120-24V-2700-6500K-5M-SILIKON

new



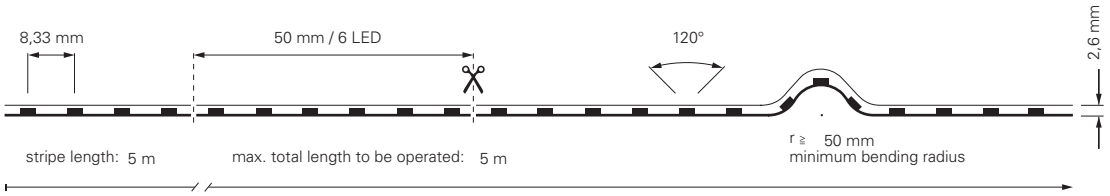

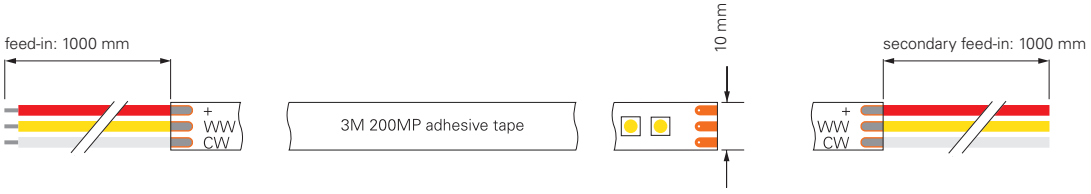



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840379	ww cw 2700-6500K	105 lm/W	1470 lm/m	5000 mm	14 W/m	140 LED/m	**219,95 €**

CV | 24 Volt | SMD 2835 | Ra 90 | + – | 2 CH | IP44 | - 15°C + 50°C

2216-196-24V-3000-6500K-5M-SILIKON



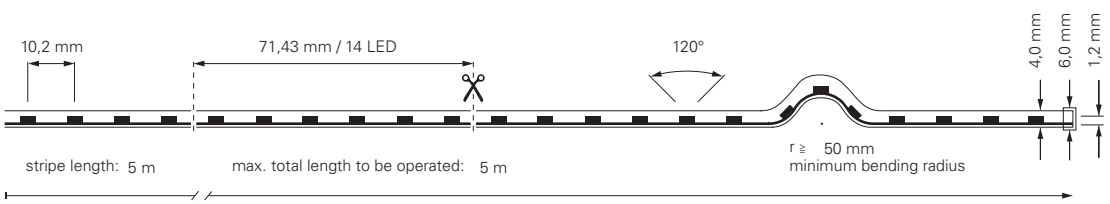

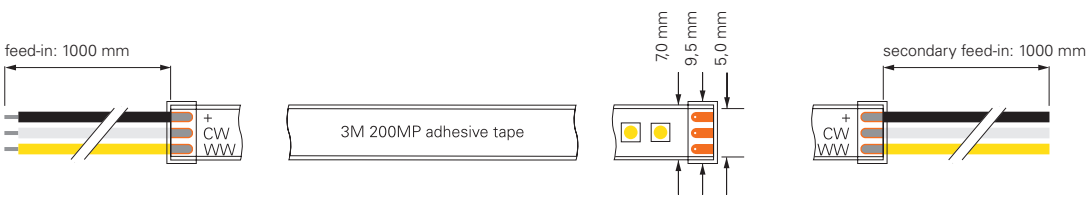

item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840349	ww cw 3000-6500K	86 lm/W	1070 lm/m	5000 mm	12,5 W/m	196 LED/m	**196,95 €**

CV | 24 Volt | SMD 2216 | Ra 90 | + – | 2 CH | IP65 | - 15°C + 50°C

incl. accessories: 10x retaining bracket, 20x stainless steel screw, 2x endcap



With the kind support of Elektro Grün, Neustadt an der Weinstraße


STANDARD | 3CH | 24V


These LED stripes in RGB are ideally suited for all standard applications and special assemblies with the most diverse requirements. With these standard stripes, you have the option of setting individual colours or flexible control to set individual colours or mixed colours as desired.



3535-120-24V-RGB-5M



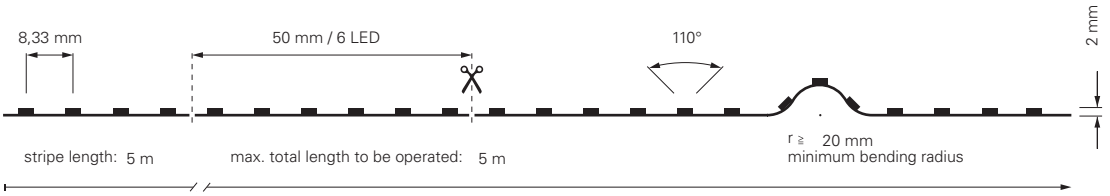

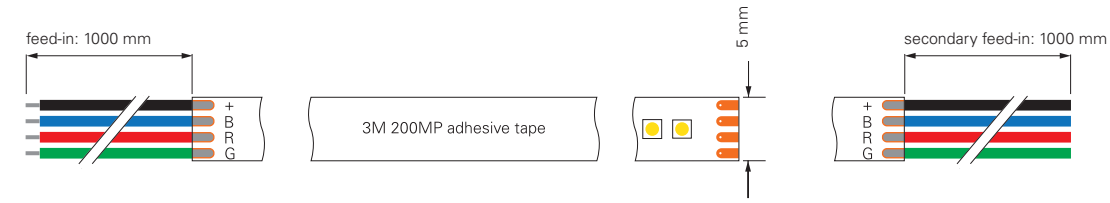



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840276	470-630 nm	45 lm/W	500 lm/m	5000 mm	11 W/m	120 LED/m	**119,95 €**

CV | 24 Volt | SMD 3535 | + − | 3 CH | IP20 | - 15°C + 50°C

5050-60-24V-RGB-5M



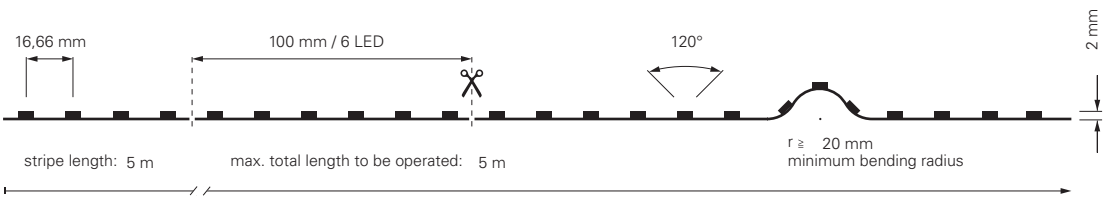

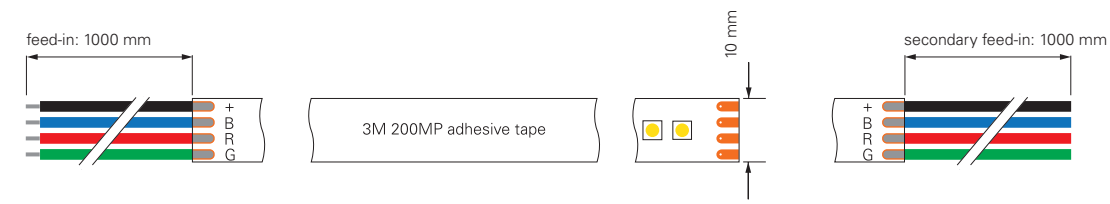



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840254	470-630 nm	45 lm/W	580 lm/m	5000 mm	13 W/m	60 LED/m	**149,95 €**

CV | 24 Volt | SMD 5050 | + − | 3 CH | IP20 | - 15°C + 50°C

5050-96-24V-RGB-5M / RGB-50M



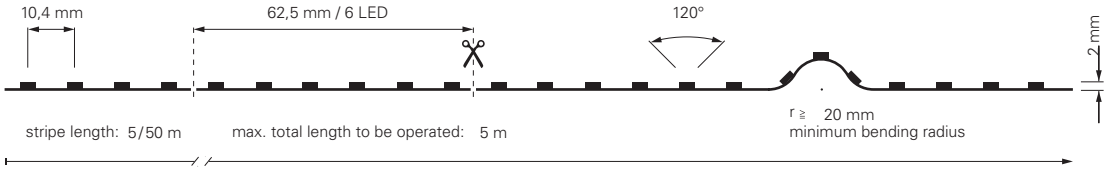

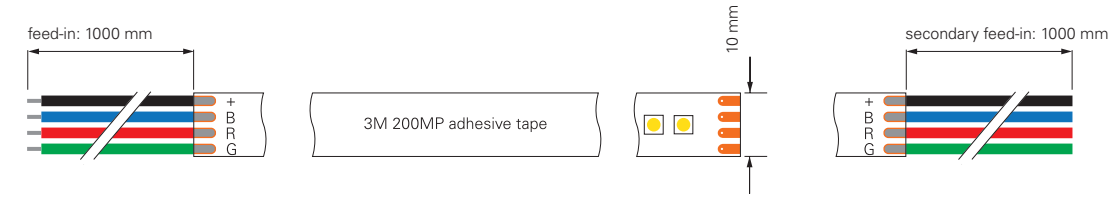



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840147	RGB 450-630 nm	48 lm/W	665 lm/m	5000 mm	14,0 W/m	96 LED/m	**189,95 €**
930516	RGB 450-630 nm	46 lm/W	665 lm/m	50000 mm	14,5 W/m	96 LED/m	**1.749,95 €**

CV | 24 Volt | SMD 5050 | + − | 3 CH | IP20 | - 15°C + 50°C

5050-120-24V-RGB-5M



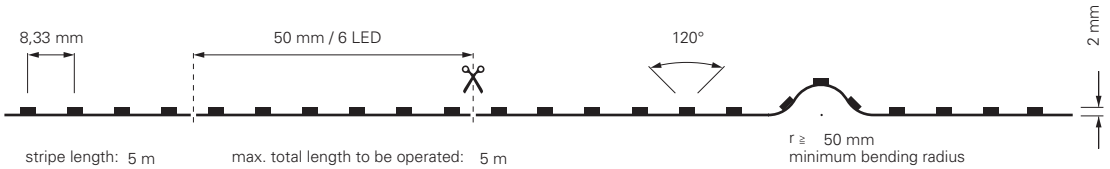

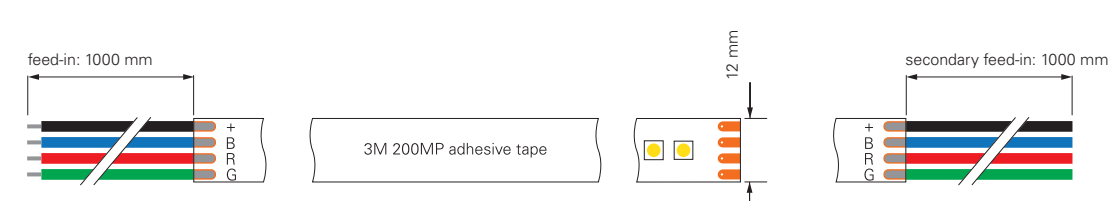



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840352	RGB 460-620 nm	38 lm/W	1055 lm/m	5000 mm	28 W/m	120 LED/m	**209,95 €**

CV | 24 Volt | SMD 5050 | + − | 3 CH | IP20 | - 15°C + 50°C

5050-120-24V-RGB-5M-SILIKON



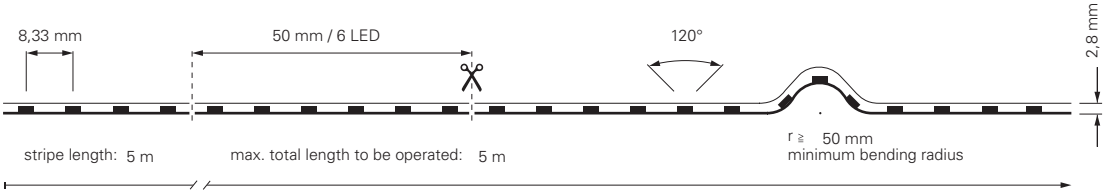

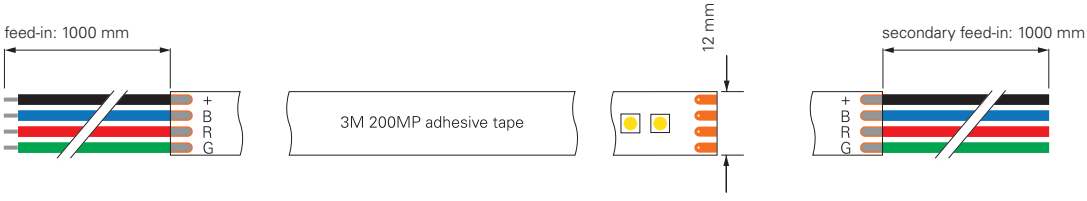



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840351	460-620 nm	38 lm/W	1045 lm/m	5000 mm	27,5 W/m	120 LED/m	**239,95 €**

CV | 24 Volt | SMD 5050 | + − | 3 CH | IP44 | - 15°C + 50°C

5050-60-24V-RGB-5M-SILIKON



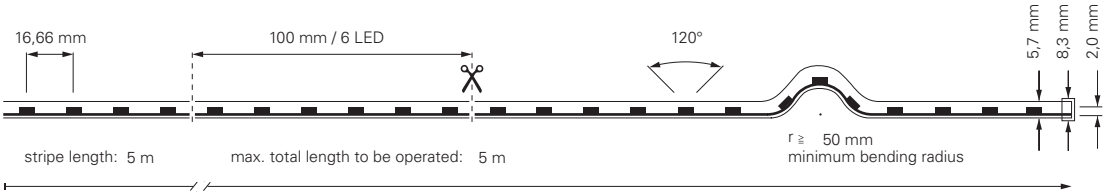

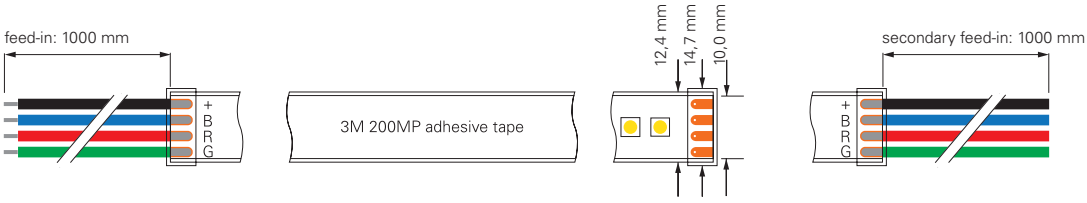

item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840256	470-630 nm	42 lm/W	530 lm/m	5000 mm	12,5 W/m	60 LED/m	**179,95 €**

CV | 24 Volt | SMD 5050 | + − | 3 CH | IP67 | - 15°C + 50°C

incl. accessories: 10x retaining bracket, 20x stainless steel screw, 2x endcap


STANDARD | 4CH | 24V


LED stripes in RGB + 3000K, 4000K, 6500K
These LED stripes are ideally suited for all standard applications and special assemblies with the most diverse requirements. With these LED stripes, you have the option of setting single colours, warm white, neutral white, cold white or mixed colours as desired through flexible control.



5050-96-24V-RGB+3000K-5M



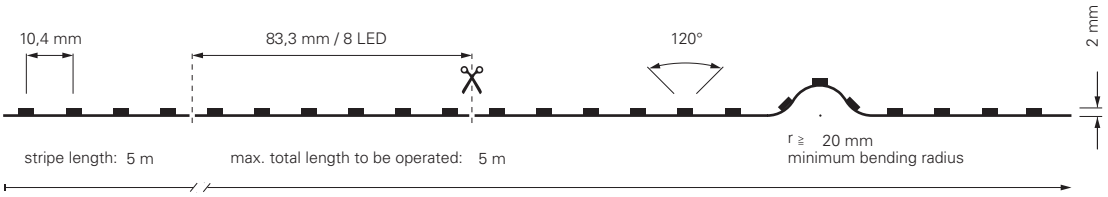

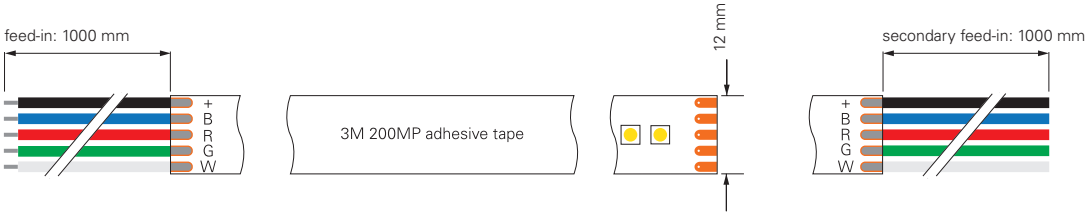



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840144	RGB WW 450-630 nm + 3000K	42 lm/W	585 lm/m	5000 mm	14W/m	96 LED/m	**189,95 €**

CV | 24 Volt | SMD 5050 | Ra 90 | + − | 4 CH | IP20 | - 15°C + 50°C

5050-60-24V-RGB+3000K-5M + 5050-60-24V-RGB+3000K-50M



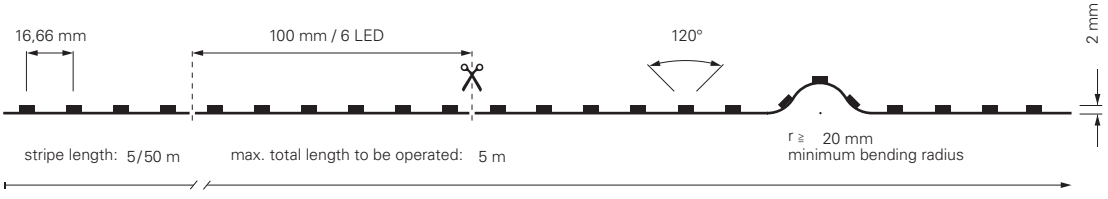

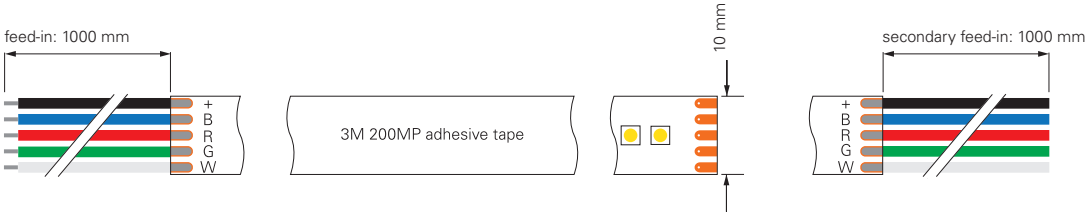



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840236	RGB WW 450-630 nm + 3000K	51 lm/W	820 lm/m	5000 mm	16 W/m	60 LED/m	**160,95 €**
930517	RGB WW 450-630 nm + 3000K	51 lm/W	820 lm/m	50000 mm	16 W/m	60 LED/m	**1.445,95 €**

CV | 24 Volt | SMD 5050 | Ra 80 | + − | 4 CH | IP20 | - 15°C + 50°C

5050-60-24V-RGB+4000K-5M



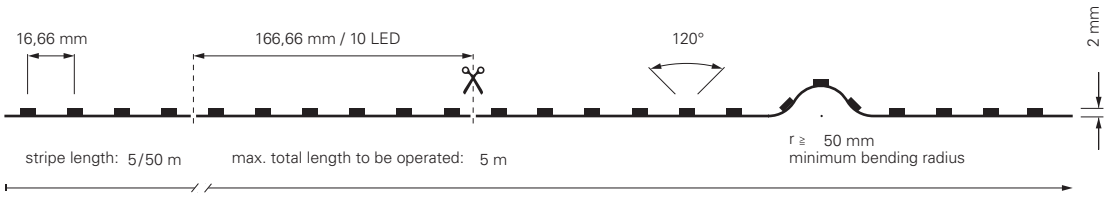

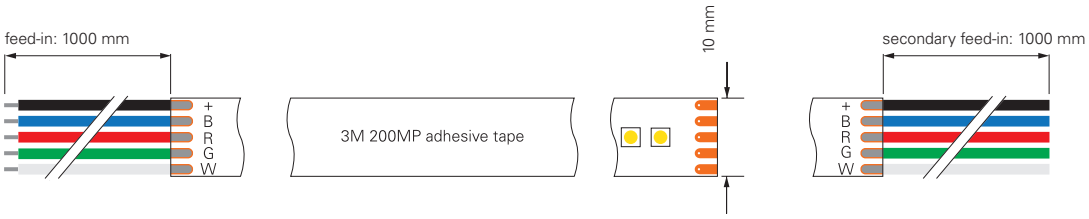



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840353	RGB NW 450-630 nm + 4000K	47 lm/W	775 lm/m	5000 mm	16,5 W/m	60 LED/m	**169,95 €**

CV | 24 Volt | SMD 5050 | Ra 80 | + − | 4 CH | IP20 | - 15°C + 50°C

3535-192-24V-RGB+3000K-5M / RGB+4000K-5M



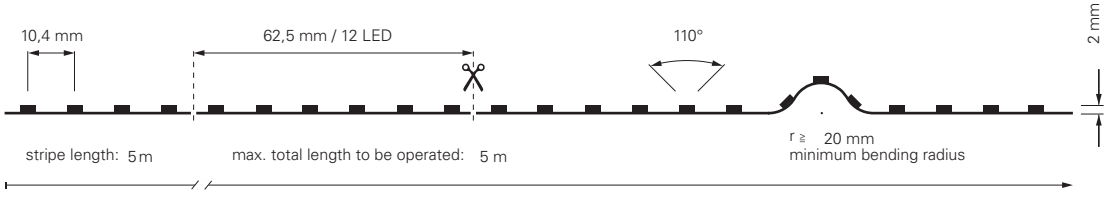

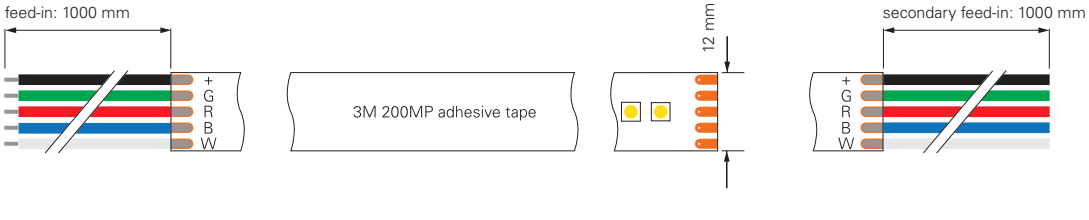



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840308	RGB WW 470-630 nm + 3000K	43 lm/W	955 lm/m	5000 mm	22 W/m	192 LED/m	**199,95 €**
840309	RGB NW 470-630 nm + 4000K	45 lm/W	985 lm/m	5000 mm	22 W/m	192 LED/m	**199,95 €**

CV | 24 Volt | SMD 3535 | Ra 90 | + − | 4 CH | IP20 | - 15°C + 50°C

5050-60-24V-RGB+4000K-5M-SILIKON



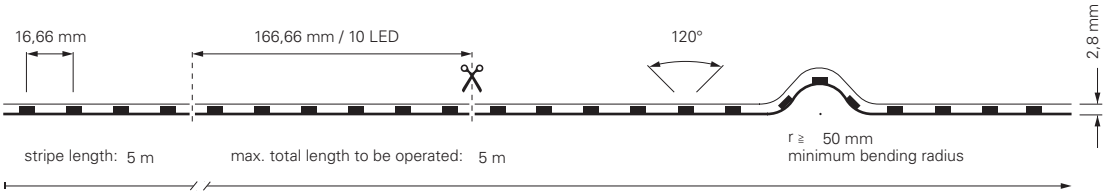

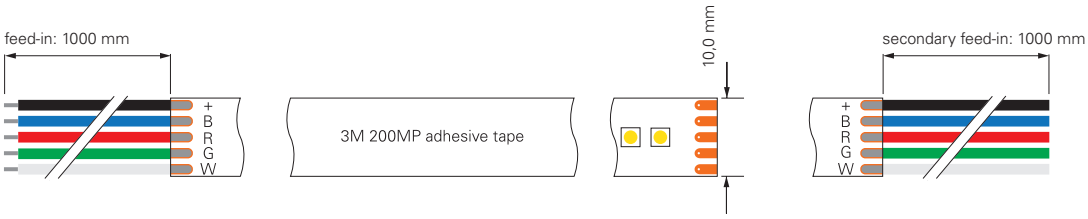



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840373	RGB NW 450-630 nm + 4000K	48 lm/W	765 lm/m	5000 mm	16,0 W/m	60 LED/m	**179,95 €**

CV | 24 Volt | SMD 5050 | Ra 80 | + − | 4 CH | IP44 | - 15°C + 50°C

5050-60-24V-RGB+3000K-5M-SILIKON



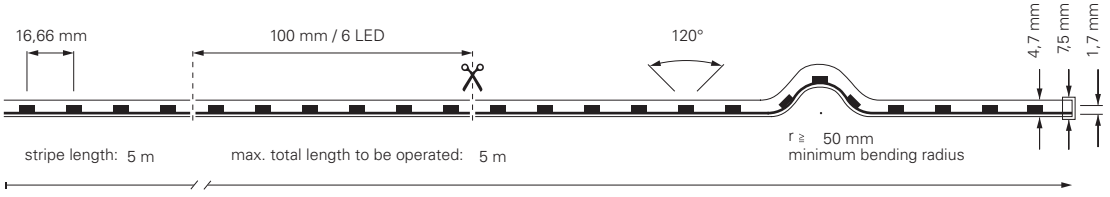

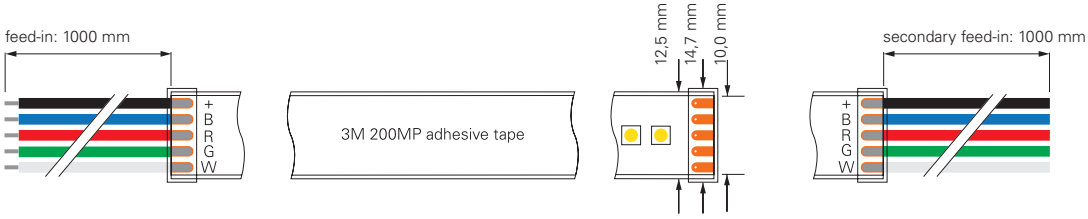

item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840239	RGB WW 450-630 nm + 3000K	49 lm/W	735 lm/m	5000 mm	15 W/m	60 LED/m	**193,95 €**

CV | 24 Volt | SMD 5050 | + − | 4 CH | IP67 | - 15°C + 50°C

incl. accessories: 10x retaining bracket, 20x stainless steel screw, 2x endcap

D FLEX LINE – FLEXIBLE IN MANY WAYS

Are you looking for a flexible, water-protected and homogeneously illuminated LED stripe? With our D FLEX LINE series, we combine all requirements in one continuous row. Our D Flex Line stripes are available in two basic versions, as Top View and Side View. The difference lies in the built-in positioning of the LED stripes, because this results in two significant differences in the possible mounting / placement of the stripes.

Due to a completely flexible potting, the D FLEX LINE achieve a degree of protection of up to IP68 as well as a completely homogeneous light pattern in the different LED stripes versions warm white, RGB and RGB + warm white due to the respective placement of the LED stripe. The shape and encapsulation also have a significant influence on the radiation behaviour of our strips, allowing you to achieve a beam angle of up to 180°.

The maximum total length to be operated is 5m. You can shorten the continuous rooflights at the and marked points. Each D Flex Line stripe is supplied with a feed and secondary feed of 3m each. This ensures a flexible, convenient and simple installation is guaranteed. The feed is supplied with tinned wire ends. In addition, our D FLEX LINE tapes are flame retardant and resistant to UV, chlorinated water, alt water and commercial cleaners [note content concentrations, not sea water resistant].




TOP VIEW

The LED stripe is arranged / installed horizontally, which means that the flex stripe can be bent up and down. [note the respective minimum bending radius]



D FLEX LINE TOP VIEW IP68 3000K

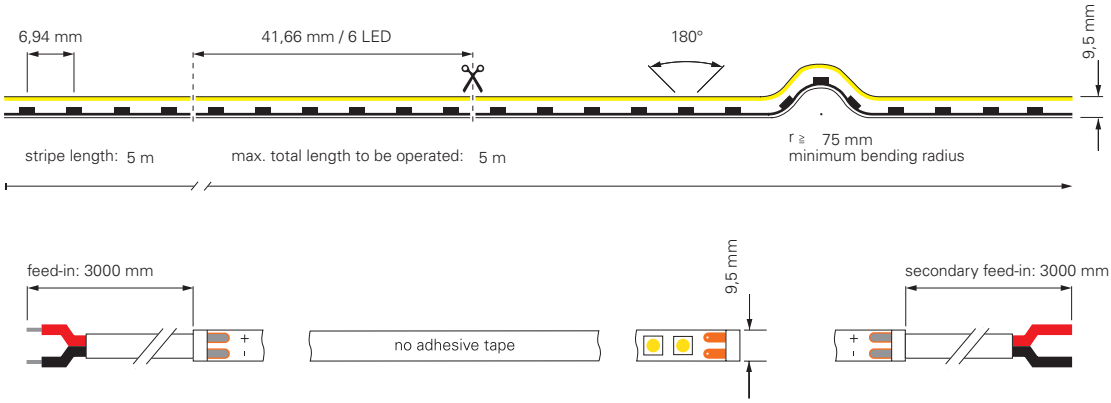


item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840285	ww 3000K	70 lm/W	730 lm/m	5000 mm	10,5 W/m	144 LED/m	**479,95 €**

CV | 24 Volt | SMD 3014 | Ra 80 | + − | 1 CH | IP68 | - 15°C + 50°C


incl. accessories: 10x retaining clip, 10x screw, 2x endcap


930446	profile for D Flex Line MINI aluminium anodized L x W x H: 1000 x 12 x 13 mm	**14,94 €**
930445	profile for D Flex Line MINI plastic | transparent L x W x H: 1000 x 12 x 13 mm	**10,95 €**
930531	assembly set for D Flex Line | 10 x 10 mm	**10,95 €**
930593	gel glue for gluing the end caps 3g	**5,95 €**

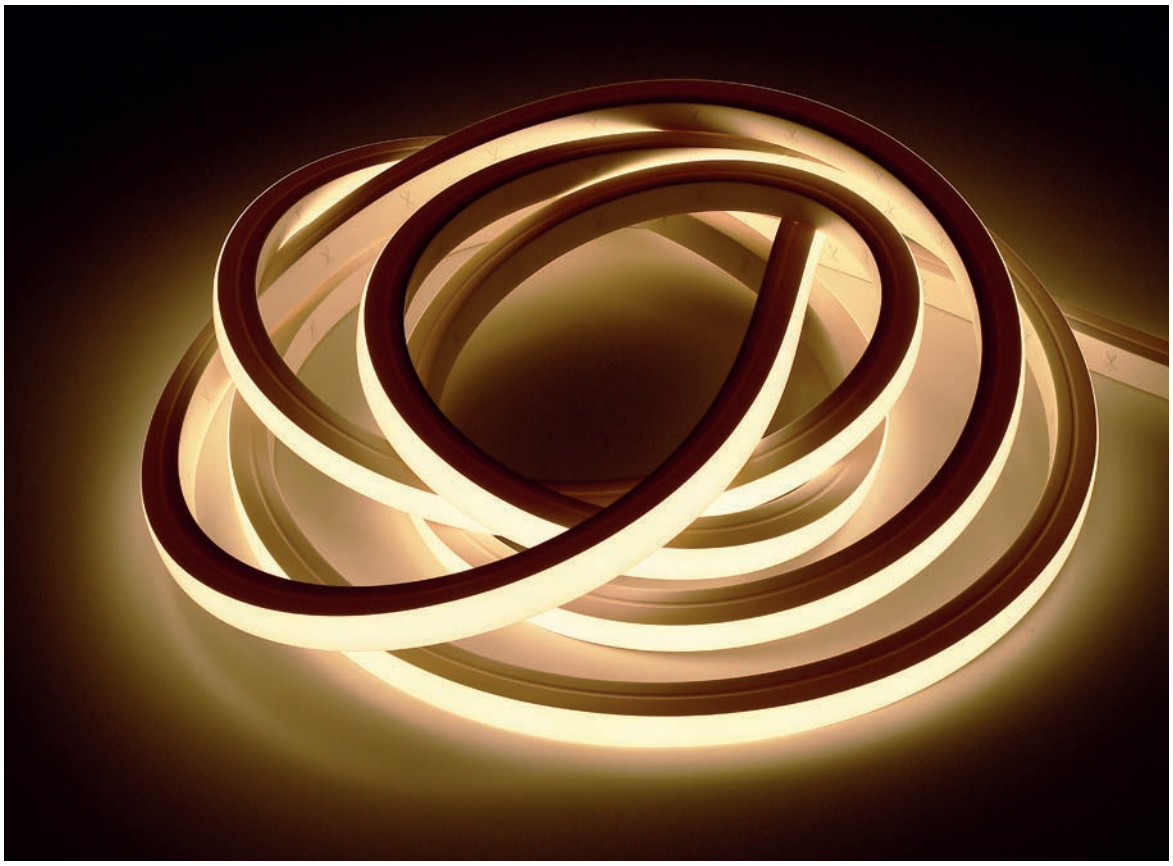



D FLEX LINE MINI TOP VIEW IP68 3000K

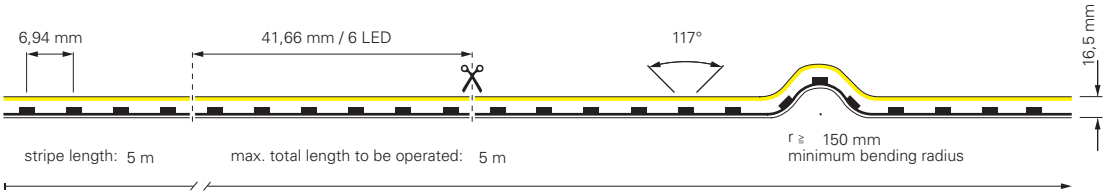

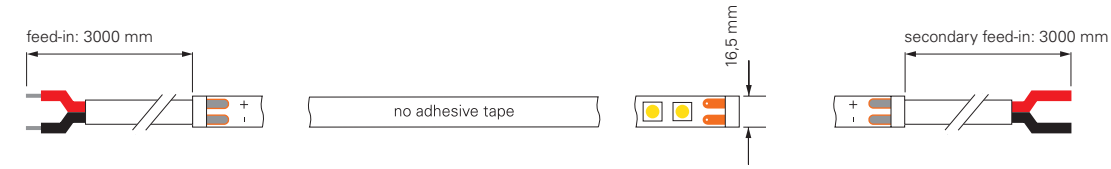



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840288	ww 3000K	49 lm/W	515 lm/m	5000 mm	10,5 W/m	144 LED/m	**749,95 €**


CV | 24 Volt | SMD 3014 | Ra 80 | + − | 1 CH | IP68 | - 15°C + 50°C


incl. accessories: 10x retaining clip, 10x screw, 2x endcap

930448	profile for D Flex Line TOP aluminium anodized L x W x H: 1000 x 19 x 18 mm	**14,94 €**
930449	profile for D Flex Line TOP plastic | transparent L x W x H: 1000 x 19 x 18 mm	**11,95 €**
930533	assembly set for D Flex Line | 16 x 15 mm	**10,95 €**
930593	gel glue for gluing the end caps 3g	**5,95 €**

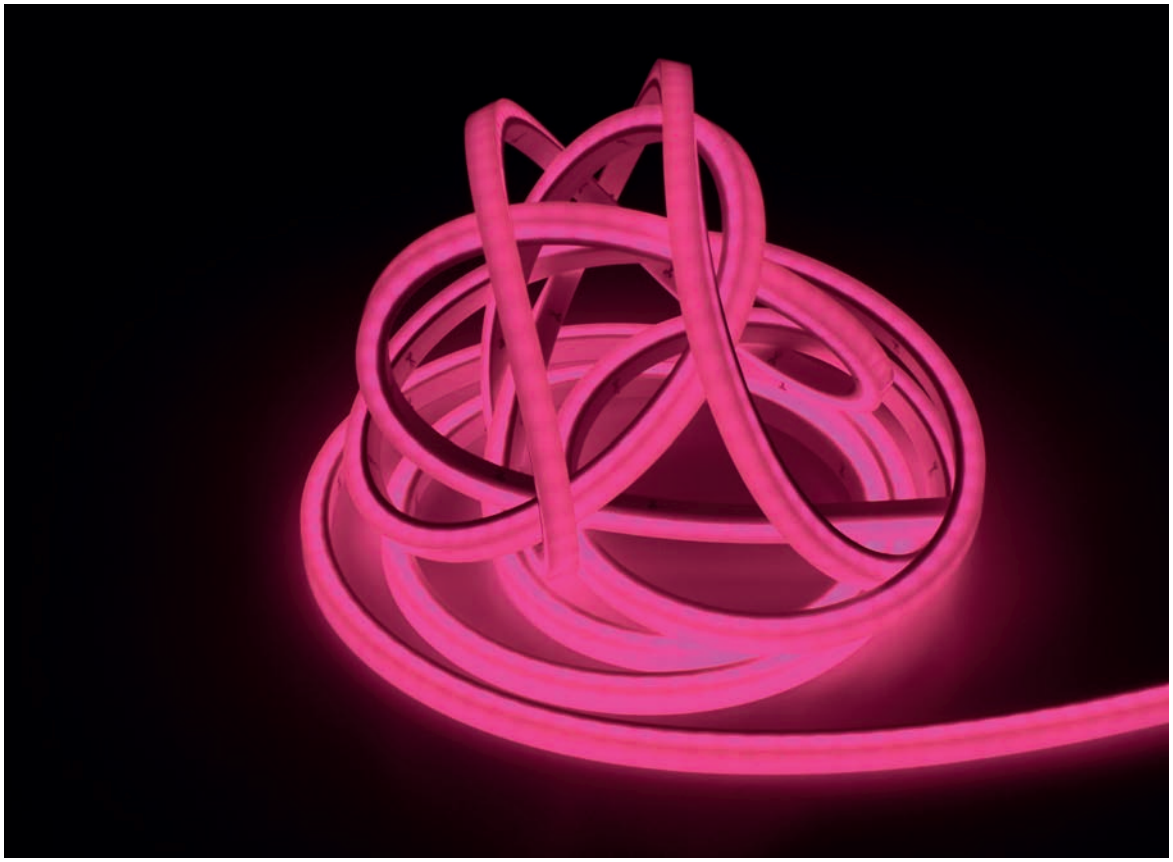

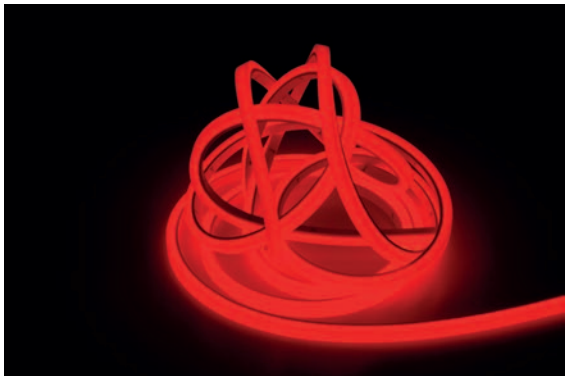


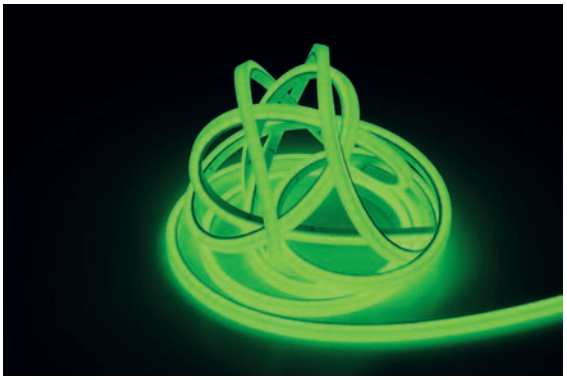


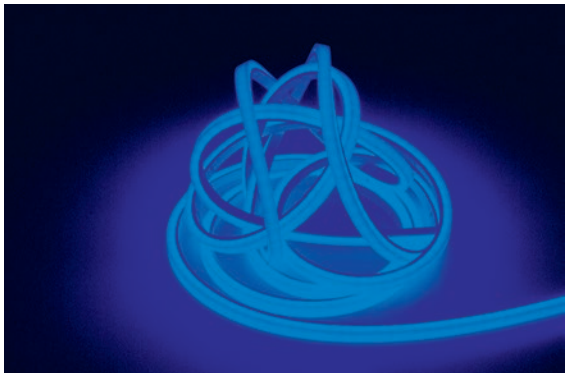



D FLEX LINE TOP VIEW IP68 RGB

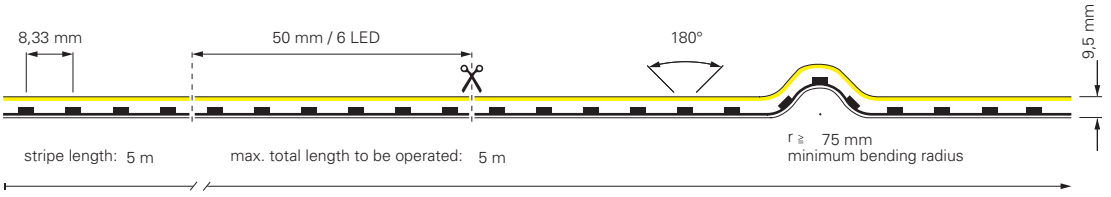

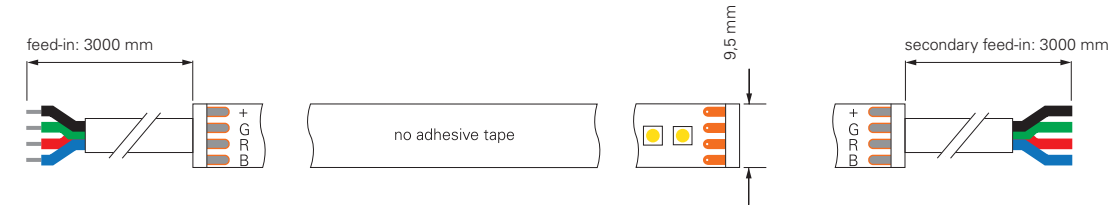

item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840286	RGB 460-620 nm	32 lm/W	315 lm/m	5000 mm	10 W/m	120 LED/m	**519,95 €**

CV | 24 Volt | SMD 4040 | + − | 3 CH | IP68 | - 15°C + 50°C

incl. accessories: 10x retaining clip, 10x screw, 2x endcap

930446	profile for D Flex Line MINI aluminium anodized L x W x H: 1000 x 12 x 13 mm	**14,94 €**
930445	profile for D Flex Line MINI plastic | transparent L x W x H: 1000 x 12 x 13 mm	**10,95 €**
930531	assembly set for D Flex Line | 10 x 10 mm	**10,95 €**
930593	gel glue for gluing the end caps 3g	**5,95 €**















D FLEX LINE TOP VIEW IP68 RGBW

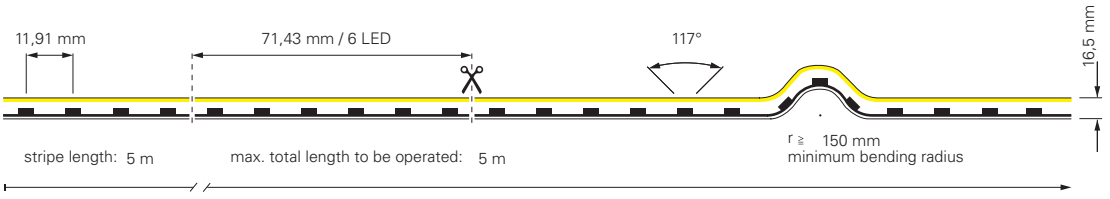

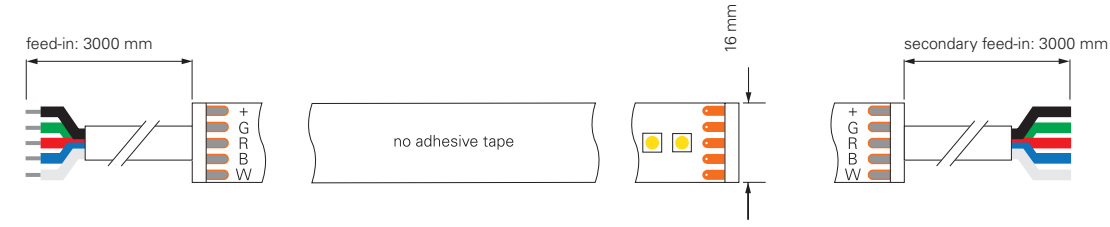

item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840289	RGB WW 470-620 nm	30 lm/W	320 lm/m	5000 mm	10,5 W/m	84 LED/m	**779,95 €**

CV | 24 Volt | SMD 5050 | Ra 80 | + − | 4 CH | IP68 | - 15°C + 50°C

incl. accessories: 10x retaining clip, 10x screw, 2x endcap

930448	profile for D Flex Line TOP aluminium anodized L x W x H: 1000 x 19 x 18 mm	**14,94 €**
930449	profile for D Flex Line TOP plastic | transparent L x W x H: 1000 x 19 x 18 mm	**11,95 €**
930533	assembly set for D Flex Line | 16 x 15 mm	**10,95 €**
930593	gel glue for gluing the end caps 3g	**5,95 €**




SIDE VIEW

The LED stripe is arranged / installed vertically, which means that the flex stripe can be bent to the left and right. [note the respective minimum bending radius]



D FLEX LINE MINI SIDE VIEW IP44 3000K

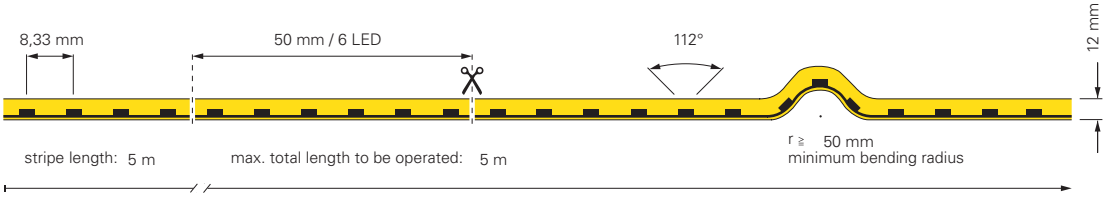



item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840376	ww 3000K	30 lm/W	285 lm/m	5000 mm	9,5 W/m	120 LED/m	**359,95 €**


CV | 24 Volt | SMD 3014 | Ra 90 | + − | 1 CH | IP44 | - 15°C + 50°C


incl. accessories: 10x retaining clip, 10x screw, 2x endcap

930443	profile for D Flex Line aluminium anodized L x W x H: 1000 x 9 x 13 mm	**12,95 €**
930444	Flex profile for D Flex Line aluminium L x W x H: 500 x 9 x 12 mm	**21,95 €**
930530	assembly set for D Flex Line | 6,5 x 12 mm	**9,95 €**
930593	gel glue for gluing the end caps 3g	**5,95 €**



D FLEX LINE MINI SIDE VIEW IP68 3000K

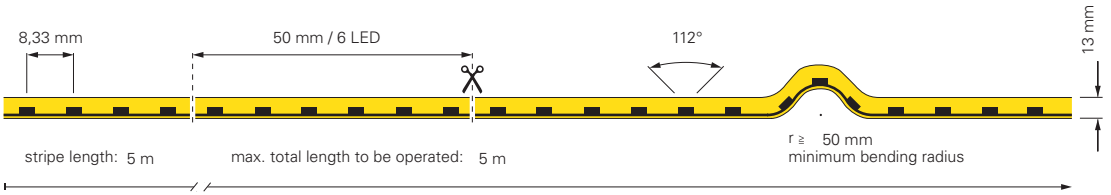

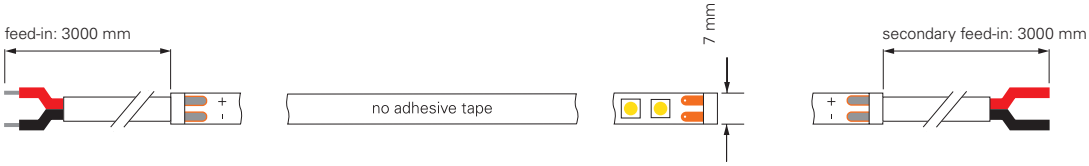

item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840283	ww 3000K	37 lm/W	295 lm/m	5000 mm	8 W/m	120 LED/m	**559,95 €**


CV | 24 Volt | SMD 3014 | Ra 80 | + – | 1 CH | IP68 | - 15°C + 50°C


incl. accessories: 10x retaining clip, 10x screw, 2x endcap

930443	profile for D Flex Line aluminium anodized L x W x H: 1000 x 9 x 13 mm	**12,95 €**
930444	Flex profile for D Flex Line aluminium L x W x H: 500 x 9 x 12 mm	**21,95 €**
930530	assembly set for D Flex Line | 6,5 x 12 mm	**9,95 €**
930593	gel glue for gluing the end caps 3g	**5,95 €**



D FLEX LINE MINI SIDE VIEW IP68 3000K

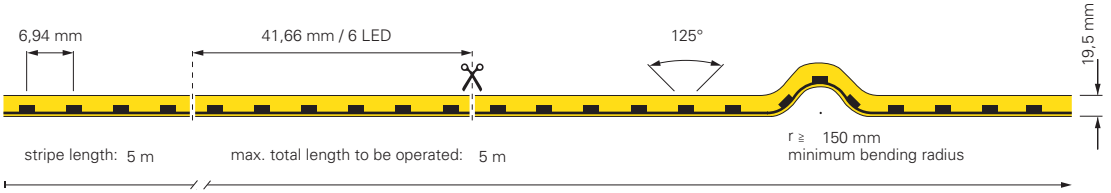

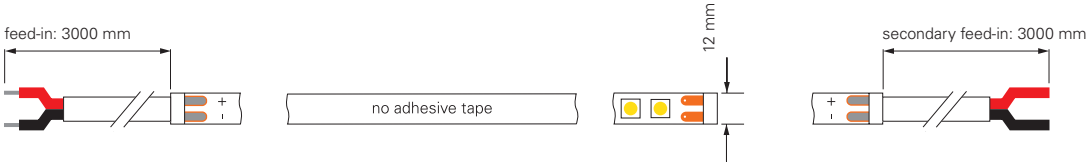


item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840287	ww 3000K	36 lm/W	368 lm/m	5000 mm	10,5 W/m	144 LED/m	**799,95 €**

CV | 24 Volt | SMD 3014 | Ra 80 | + − | 1 CH | IP68 | - 15°C + 50°C


incl. accessories: 10x retaining clip, 10x screw, 2x endcap


930447	profile for D Flex Line SIDE aluminium anodized L x W x H: 1000 x 15 x 21 mm	**14,95 €**
930451	Flex profile for D Flex Line Side aluminium L x W x H: 500 x 15 x 20 mm	**26,95 €**
930532	assembly set for D Flex Line | 12 x 20 mm	**9,95 €**
930593	gel glue for gluing the end caps 3g	**5,95 €**

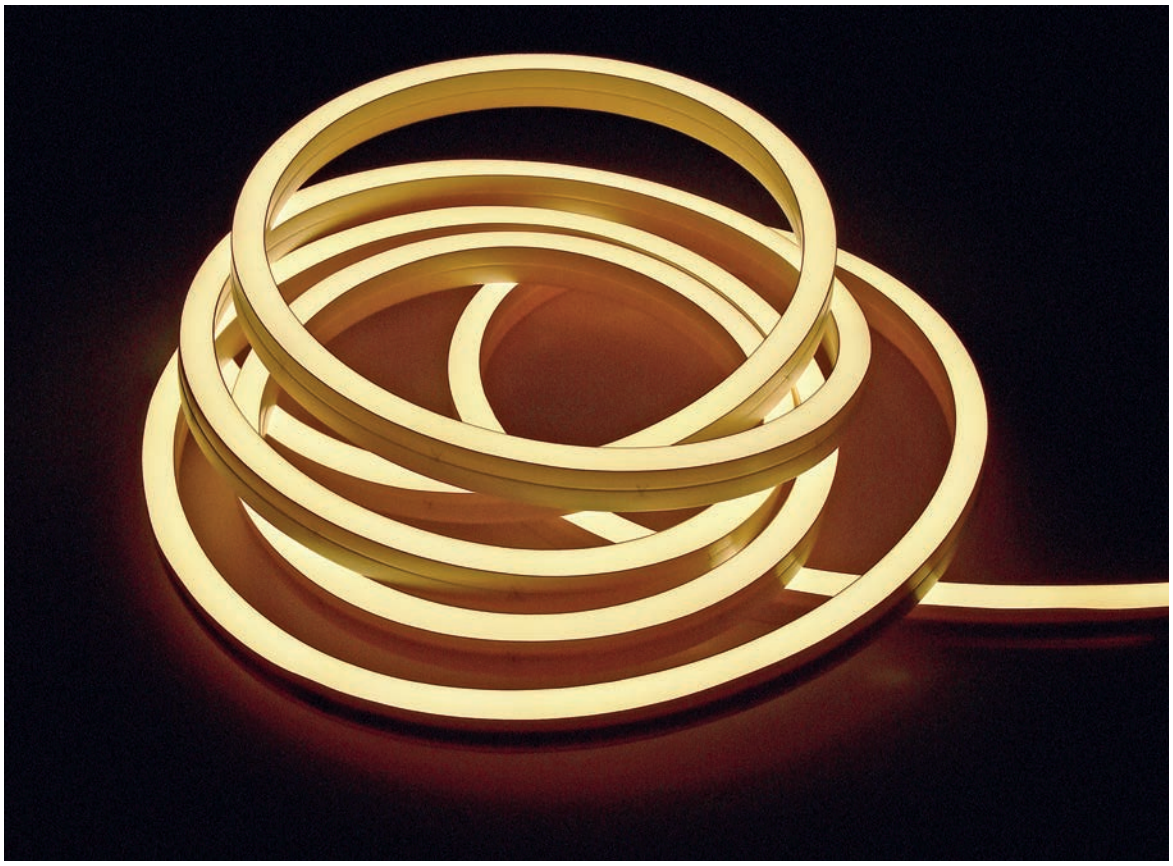






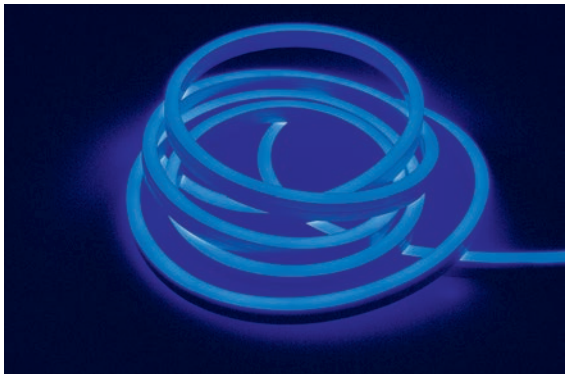


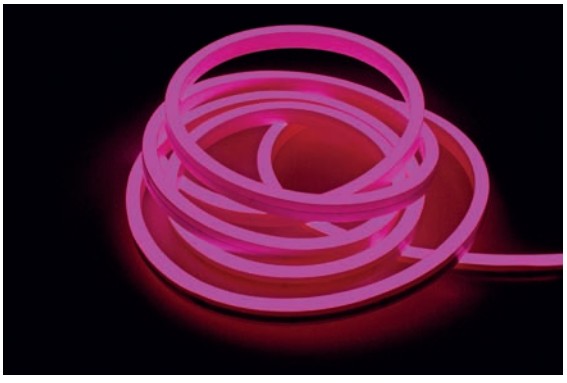



D FLEX LINE SIDE VIEW IP68 RGBW

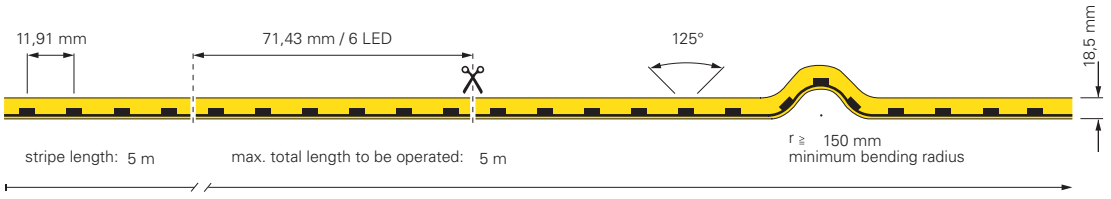

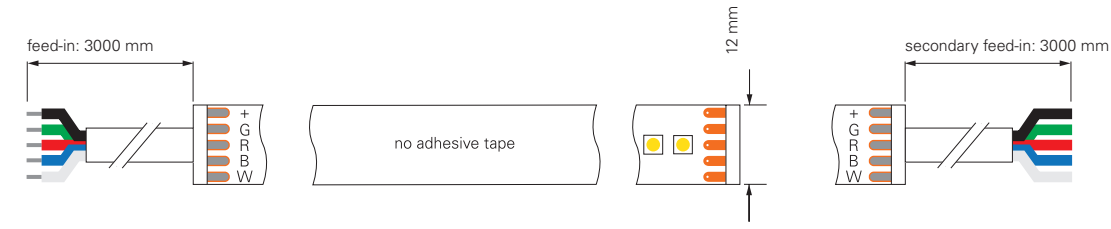

item	colour temperature	efficiency	light current	dimensions L	power	light source	price
840290	RGB WW 470-630 nm	20 lm/W	210 lm/m	5000 mm	10,5 W/m	84 LED/m	**799,95 €**

CV | 24 Volt | SMD 5050 | Ra 80 | + − | 4 CH | IP68 | - 15°C + 50°C

incl. accessories: 10x retaining clip, 10x screw, 2x endcap

930447	profile for D Flex Line SIDE aluminium anodized L x W x H: 1000 x 15 x 21 mm	**14,95 €**
930451	Flex profile for D Flex Line Side aluminium L x W x H: 500 x 15 x 20 mm	**26,95 €**
930532	assembly set for D Flex Line | 12 x 20 mm	**9,95 €**
930593	gel glue for gluing the end caps 3g	**5,95 €**

230V | 1CH

This LED stripe is ideally suited if the requirements and focus are on flexible, water-protected and long-lasting lighting routes in indoor and outdoor areas.
Due to the voltage of 230V, no additional power supply unit is required. The delivery is ready for connection with mounted Schuko plug and moulded endcap.
The LED stripe can be dimmed from 100% to 40% by a phase on/phase off dimmer to suit the requirement or ambient lighting.
Applications of large distances, such as on buildings or hotel corridors can be operated in one piece up to 50m.



2835-84-230V-2700K-15M / 2700K-50M / 3000K-15M / 3000K-50M / 4000K-15M / 4000K-50M
PVC-EXTRUSION

new





item	colour temperature		efficiency	light current	dimensions L	power	light source	price
840390	WW	2700K	103 lm/W	1442 lm/m	15000 mm	14 W/m	84 LED/m	**769,95 €**
840391	WW	2700K	103 lm/W	1442 lm/m	50000 mm	14 W/m	84 LED/m	**2.499,95 €**
840386	WW	3000K	105 lm/W	1470 lm/m	15000 mm	14 W/m	84 LED/m	**769,95 €**
840387	WW	3000K	105 lm/W	1470 lm/m	50000 mm	14 W/m	84 LED/m	**2.499,95 €**
840388	NW	4000K	114 lm/W	1596 lm/m	15000 mm	14 W/m	84 LED/m	**769,95 €**
840389	NW	4000K	114 lm/W	1596 lm/m	50000 mm	14 W/m	84 LED/m	**2.499,95 €**



840390, 840386, 840388 incl. 30 brackets with screws and dowels
840391, 840387, 840389 incl. 100 brackets with screws and dowels

930689	end caps set 2 pieces	**4 ,95 €**
930690	feed-in cable 300cm with IP44 contour plug	**34,95 €**
930691	flexible-connector 60cm	**24,95 €**
930692	mounting clamps set 10 pieces	**9,95 €**
930693	plastic mounting profile 100cm	**14,95 €**
930593	gel glue for gluing the end caps 3g	**5,95 €**


DEKOLIGHT
LED Driver Constant Voltage
DEKOLIGHT
LED Driver Constant Voltage

POWER SUPPLIES

688 power supplies | overview
690 technical information
692 DC | CV | quick finder
696 DC | CV
708 DC | CC | quick finder
710 DC | CC
722 DC | CC/CV
724 AC | CV | quick finder
725 AC | CV
727 gear units for metal vapour lamps



DC | CV
not dimmable
from page 696



DC | CV
not dimmable | IP
from page 698



DC | CV
dimmable via phase
control or phase cut-off
from page 700



DC | CV
dimmable via 1-10V
from page 702



DC | CV |
dimmable via DALI /
DALI+1-10V / Touch-Dim
from page 704



DC | CV
dimmable via KNX
page 706

new



DC | CV
dimmable via CASAMBI
page 706



DC | CV
dimmable via DMX
page 707



DC | CC
not dimmable
from page 711

new



DC | CC
dimmable via
phase cut-off
from page 714



DC | CC
dimmable via phase
control or phase cut-off
page 717



DC | CC
dimmable via DALI /
DALI + Intelli-Touch-Dim
from page 718



DC | CC
dimmable via KNX
page 721

new



DC | CC
dimmable via CASAMBI
page 722



DC | CC/CV
dimmable via phase
control or Touch-Dim
page 723



AC | CV
dimmable via phase
control or phase cut-off
page 725



AC | CV | dimmable via
leading edge
page 726



gear units for
metal vapour lamps
page 727



power supplies



PLANNING ELECTRICAL INSTALLATIONS EVEN BETTER

You will certainly notice the new technical data when browsing through our power supplies and ask yourself what it is all about? In future, we would like to support you even better in the planning and dimensioning of your installations. The background to this is that more and more power supplies for lighting are already being installed in standard buildings [directly in the luminaires or as an external power supply].

Due to the inrush currents inherent in the design, e.g. after a power failure and the subsequent simultaneous start of all power supplies, an overload of the circuit breakers may occur. In order to be able to take this into account during the planning stage, we provide you with the necessary data for all our power supplies.

INRUSH CURRENT

In future, you will find the specification of the maximum inrush current directly with our power supply units. The maximum current value [amperes/A], is specified in connection with the respective time [microseconds/µs] and defines when exactly the highest current consumption occurs after the mains voltage is applied. You will find this limit value again with many manufacturers in the data sheets of corresponding components, as this can lead to an overload/damage.

DEKO-LIGHT POWER SUPPLIES | DESIGN FLAT

- plastic housing
- suitable for indoor use
- flicker free
- short-circuit proof and overload protection
- overheat control

872629	■	12V	6W	0-500mA	7A/300µs	98 x 46 x 11 mm	**18,95 €**
862231	■	12V	12W	0-1000mA	8A/300µs	128 x 50 x 13 mm	**22,95 €**
862232	■	12V	20W	0-1670mA	12A/300µs	128 x 50 x 14 mm	**26,95 €**
862121	■	12V	50W	0-4160mA	15A/300µs	185 x 62 x 22 mm	**59,95 €**

HOW MANY POWER SUPPLY UNITS PER CIRCUIT BREAKER?

The maximum number of power supply units that may be connected to the respective circuit breaker is directly dependent on the inrush current. In our quick finders you will find the number for the most common types of circuit breaker [B10A, B16A, C10A, C16A].

CAPACITIVE LOAD OF POWER SUPPLIES

Due to their design, power supplies sometimes represent very different capacitive loads. Especially in combination with motion detectors, twilight switches or switching/dimming actuators, this value [as with the capacitor in nF/pF], which is available for many power supplies and specified in our quick finders, plays an important role with regard to the suitability and durability of all components. Please also refer to the manufacturer's data sheets.

electr. data		dimmable via							usage / design			electrical limit values		power supply	
voltage	power	leading edge / cut-off	1 - 10V	touch dimmer [push]	DMX	DALI	KNX	CASAMBI-App	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
12V	20 W								x		flat	938uF	B10A=17, B16A=27, C10A=36, C16A=58	862232	697
12V	2,5-25 W	x							x		basic	31.16nF	B10=35, B16=56, C10=35, C16=56	862240	701
12V	40 W								x		basic	251.7nF	B10A=11, B16A=18, C10A=24, C16A=39	862162	698

WIRE CROSS SECTION

When installing voltage-stable [CV] or current-stable [CC] power supply units and associated components, always ensure that the cable cross-sections are sufficiently dimensioned, especially with regard to the dependence of the cable length.

The specified cable cross-sections [mm²] were adapted to the commercially available cross-sections. The maximum cable length of 10 m should not be exceeded. »Red values« must be avoided urgently.

12 V	2 m	5 m	10 m	12 m
25 W	0,25	0,75	1,50	[2,50]
50 W	0,75	1,50	4,00	[4,00]
75 W	1,00	2,50	4,00	[6,00]
100 W	1,50	4,00	6,00	[10,00]
125 W	1,50	4,00	10,00	[10,00]
150 W	2,50	6,00	10,00	-
200 W	2,50	6,00	-	-
300 W	4,00	10,00	-	-
400 W	6,00	-	-	-

24 V	2 m	5 m	10 m	12 m
25 W	0,25	0,25	0,50	[0,50]
50 W	0,25	0,50	0,75	[1,00]
75 W	0,25	0,75	1,00	[1,50]
100 W	0,50	0,75	1,50	[2,50]
125 W	0,50	1,00	2,50	[2,50]
150 W	0,50	1,50	2,50	[4,00]
200 W	0,75	1,50	4,00	[4,00]
300 W	1,00	2,50	6,00	-
400 W	1,50	4,00	6,00	-

48 V	2 m	5 m	10 m	12 m
25 W	0,25	0,25	0,25	[0,25]
50 W	0,25	0,25	0,25	[0,25]
75 W	0,25	0,25	0,50	[0,50]
100 W	0,25	0,25	0,50	[0,50]
125 W	0,25	0,25	0,50	[0,75]
150 W	0,25	0,50	0,75	[0,75]
200 W	0,25	0,50	1,00	[1,00]
300 W	0,25	0,75	1,50	[1,50]
400 W	0,50	1,00	2,50	[2,50]

DO YOU ALREADY KNOW OUR LONG-FLAT POWER SUPPLIES?

These power supplies have a lot of power up to 150 watts of concentrated power with a cross-section of just 30 x 22 mm! This power supply unit therefore fits in almost all ceiling coves, shadow gaps or in all other installation situations with little space.





electr. data		dimmable via							usage / design			electrical limit values		power supply	
voltage	power	leading edge / cut-off	1 - 10V	touch dimmer [push]	DMX	DALI	KNX	CASAMBI-App	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
12V	4 W								x	x	mini		B10A=17, B16A=28, C10A=37, C16A=59	872127	696
12V	6 W								x		flat	38.83nF	B10A=17, B16A=28, C10A=37, C16A=59	872629	697
12V	12 W								x	x	octo	101uF	B10A=17, B16A=27, C10A=36, C16A=58	862229	696
12V	12 W								x		flat		B10A=17, B16A=28, C10A=37, C16A=59	872632	697
12V	20 W								x		flat	938uF	B10A=17, B16A=27, C10A=36, C16A=58	862232	697
12V	2,5-25 W	x							x		basic	31.16nF	B10=35, B16=56, C10=35, C16=56	862240	701
12V	40 W								x		basic	251.7nF	B10A=11, B16A=18, C10A=24, C16A=39	862162	698
12V	40 W								x	x	IP	621.5nF	B10A=5, B16A=9, C10A=12, C16A=19	872082	698
12V	40 W								x	x	IP		B10A=6, B16A=9, C10A=10, C16A=16	872097	699
12V	40 W		x	x		x			x		basic		B10A=18, B16A=28, C10A=36, C16A=56	862253	704
12V	45 W								x		long-flat	462.1nF	B10A=5, B16A=9, C10A=12, C16A=19	862123	697
12V	50 W								x		flat	485.5nF	B10A=11, B16A=18, C10A=24, C16A=39	862121	697
12V	12-50 W	x							x		basic	1924uF	B10A=17, B16A=28, C10A=17, C16A=28	862220	701
12V	60 W								x		long-flat	462.1nF	B10A=5, B16A=9, C10A=12, C16A=19	862093	697
12V	60 W								x	x	IP		B10A=6, B16A=9, C10A=10, C16A=16	872098	699
12V	60 W						x		x	x	IP		B10A=6, B16A=9, C10A=10, C16A=16	872109	706
12V	60 W							x	x		basic		B10A=6, B16A=9, C10A=10, C16A=16	862249	706
12V	75 W								x		basic	870nF	B10A=11, B16A=18, C10A=24, C16A=39	862127	698
12V	75 W								x	x	IP	621.5nF	B10A=5, B16A=8, C10A=10, C16A=16	872084	698
12V	75 W		x	x		x			x		basic		B10A=10, B16A=16, C10A=20, C16A=32	862254	704
12V	90 W								x	x	IP		B10A=2, B16A=3, C10A=3, C16A=6	872099	699
12V	100 W								x		basic	842.2nF	B10A=3, B16A=5, C10A=7, C16A=11	862165	698
12V	100 W								x	x	IP	621.5nF	B10A=3, B16A=5, C10A=7, C16A=11	872093	698
12V	100 W								x		long-flat	462.1nF	B10A=3, B16A=5, C10A=7, C16A=11	862125	697
12V	33-100 W	x							x	x	IP	93,14nF	B10=7, B16=15, C10=7, C16=15	872135	701
12V	34-100 W	x							x		basic	146,34nF	B10=7, B16=15, C10=7, C16=15	862241	701

electr. data		dimmable via							usage / design			electrical limit values		power supply	
voltage	power	leading edge / cut-off	1 - 10V	touch dimmer [push]	DMX	DALI	KNX	CASAMBI-App	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
12V	120 W								x	x	IP		B10A=2, B16A=4, C10A=4, C16A=6	872100	699
12V	120 W						x		x		IP		B10A=2, B16A=4, C10A=4, C16A=6	872110	706
12V	120 W							x	x		IP		B10A=2, B16A=4, C10A=4, C16A=6	862250	706
12V	135 W				x				x		*		B10A=7, B16A=12, C10A=16, C16A=25	843274	707
12V	150 W								x		long-flat	462.1nF	B10A=3, B16A=5, C10A=6, C16A=10	862172	697
12V	150 W								x		basic	591.2nF	B10A=2, B16A=4, C10A=6, C16A=9	862167	698
12V	150 W								x	x	IP	621.5nF	B10A=2, B16A=4, C10A=6, C16A=9	872086	698
12V	150 W		x						x	x	IP		B10A=3, B16A=5, C10A=6, C16A=10	872011	702
12V	200 W		x	x		x			x		basic		B10A=3, B16A=5, C10A=5, C16A=9	862160	703
12V	66-200 W	x							x	x	IP	148,64nF	B10=3, B16=7, C10=3, C16=7	872137	701
12V	200 W								x	x	IP	621.5nF	B10A=2, B16A=3, C10A=4, C16A=7	872088	698
12V	200 W						x		x		IP		B10A=2, B16A=4, C10A=4, C16A=6	872111	706
24V	4 W								x	x	mini		B10A=59, B16A=94, C10A=123, C16A=197	872128	696
24V	6 W								x		flat	43.5nF	B10A=17, B16A=28, C10A=37, C16A=59	872630	697
24V	12 W								x	x	octo	620uF	B10A=17, B16A=27, C10A=36, C16A=58	862230	696
24V	12 W								x		flat	311uF	B10A=17, B16A=27, C10A=36, C16A=58	862233	697
24V	20 W								x		flat	446uF	B10A=17, B16A=27, C10A=36, C16A=58	862234	697
24V	2,5-25 W	x							x		basic	9520uF	B10=35, B16=56, C10=35, C16=56	862221	701
24V	40 W								x		basic	762nF	B10A=11, B16A=18, C10A=24, C16A=39	862163	698
24V	40 W								x	x	IP	626.3nF	B10A=5, B16A=9, C10A=12, C16A=19	872083	698
24V	40 W								x	x	IP		B10A=6, B16A=9, C10A=10, C16A=16	872101	699
24V	40 W		x	x		x			x		basic		B10A=18, B16A=28, C10A=36, C16A=56	862255	704
24V	45 W								x		long-flat	451.2nF	B10A=5, B16A=9, C10A=12, C16A=19	862124	697
24V	12-50 W	x							x		basic	10520uF	B10A=17, B16A=28, C10A=17, C16A=28	862222	701
24V	50 W								x		flat	604.5nF	B10A=11, B16A=18, C10A=24, C16A=39	862122	697
24V	60 W		x						x		*		B10A=10, B16A=16, C10A=10, C16A=16	872817	702

electr. data		dimmable via							usage / design			electrical limit values		power supply	
voltage	power	leading edge / cut-off	1 - 10V	touch dimmer [push]	DMX	DALI	KNX	CASAMBI-App	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
24V	60 W								x		long-flat	451.2nF	B10A=5, B16A=9, C10A=12, C16A=19	862094	697
24V	60 W								x	x	IP		B10A=6, B16A=9, C10A=10, C16A=16	872102	699
24V	60 W						x		x		IP		B10A=6, B16A=9, C10A=10, C16A=16	872112	706
24V	12-60 W	x							x	x	*			872045	700
24V	60 W							x	x		basic		B10A=6, B16A=9, C10A=10, C16A=16	862251	706
24V	75 W								x		basic	760nF	B10A=11, B16A=18, C10A=24, C16A=39	862164	698
24V	75 W								x	x	IP	626.3nF	B10A=5, B16A=8, C10A=10, C16A=16	872085	698
24V	75 W		x	x		x			x		basic		B10A=10, B16A=16, C10A=20, C16A=32	862256	704
24V	90 W								x	x	IP		B10A=2, B16A=3, C10A=3, C16A=6	872103	699
24V	100 W								x		basic	724.2nF	B10A=3, B16A=5, C10A=7, C16A=11	862166	698
24V	33-100 W	x							x		IP	94,13nF	B10=7, B16=15, C10=7, C16=15	872136	701
24V	34-100 W	x							x		basic	140.74nF	B10=7, B16=15, C10=7, C16=15	862242	701
24V	100 W								x		long-flat	451.2nF	B10A=3, B16A=5, C10A=7, C16A=11	862126	703
24V	100 W								x	x	IP	626.3nF	B10A=3, B16A=5, C10A=7, C16A=11	872094	698
24V	120 W								x	x	IP		B10A=2, B16A=4, C10A=4, C16A=6	872104	699
24V	120 W						x		x	x	IP		B10A=2, B16A=4, C10A=4, C16A=6	872113	706
24V	120 W							x	x		basic		B10A=2, B16A=4, C10A=4, C16A=6	862252	706
24V	135 W				x				x		*		B10A=7, B16A=12, C10A=16, C16A=25	843275	707
24V	150 W								x		basic	591.2nF	B10A=2, B16A=4, C10A=6, C16A=9	862168	698
24V	150 W								x		long-flat	451.2nF	B10A=3, B16A=5, C10A=6, C16A=10	862173	697
24V	150 W								x	x	IP	626.3nF	B10A=2, B16A=4, C10A=6, C16A=9	872087	698
24V	30-150 W	x							x	x	*			872046	700
24V	200 W		x	x		x			x		basic		B10A=4, B16A=6, C10A=7, C16A=12	862161	703
24V	200 W						x		x		IP		B10A=2, B16A=4, C10A=4, C16A=6	872114	706
24V	66-200 W	x							x	x	IP	148.64nF	B10=3, B16=7, C10=3, C16=7	872138	701
24V	240 W								x	x	IP	626.3nF	B10A=2, B16A=3, C10A=4, C16A=7	872089	698

electr. data		dimmable via							usage / design			electrical limit values		power supply	
voltage	power	leading edge / cut-off	1 - 10V	touch dimmer [push]	DMX	DALI	KNX	CASAMBI-App	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
24V	320 W								x	x	IP	626.3nF	B10A=2, B16A=3, C10A=4, C16A=6	872091	698
48V	40 W								x	x	IP		B10A=6, B16A=9, C10A=10, C16A=16	872105	699
48V	60 W								x	x	IP		B10A=6, B16A=9, C10A=10, C16A=16	872106	699
48V	75 W								x	x	IP		B10A=4, B16A=7, C10A=7, C16A=11	872116	699
48V	75 W		x						x	x	IP		B10A=4, B16A=7, C10A=7, C16A=11	872117	703
48V	75 W					x			x	x	IP		B10A=4, B16A=7, C10A=7, C16A=11	872118	705
48V	90 W								x	x	IP		B10A=2, B16A=3, C10A=3, C16A=6	872107	699
48V	120 W								x	x	IP		B10A=2, B16A=4, C10A=4, C16A=6	872108	699
48V	150 W								x	x	IP		B10A=2, B16A=3, C10A=3, C16A=5	872119	699
48V	150 W		x						x	x	IP		B10A=2, B16A=3, C10A=3, C16A=5	872120	703
48V	150 W					x			x	x	IP		B10A=2, B16A=3, C10A=3, C16A=5	872121	705
48V	200 W						x		x		IP		B10A=2, B16A=4, C10A=4, C16A=6	872115	706
48V	240 W								x	x	IP		B10A=2, B16A=4, C10A=4, C16A=6	872122	699
48V	240 W		x						x	x	IP		B10A=2, B16A=4, C10A=4, C16A=6	872123	703
48V	240 W					x			x	x	IP		B10A=2, B16A=4, C10A=4, C16A=6	872124	705
48V	600 W								x	x	IP		B10A=1, B16A=1, C10A=1, C16A=2	872125	699

power supplies design



mini round / octo flat basic long-flat IP * special design

DEKO-LIGHT POWER SUPPLIES | DESIGN MINI



- plastic housing
- suitable for indoor and outdoor use
- flicker free
- short-circuit proof and overload protection

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price
872127	black	12V	4W	0-330mA	5A/260µs	38 x 27 x 21 mm	**13,95 €**
872128	black	24V	4W	0-170 mA	5A/260µs	38 x 27 x 21 mm	**13,95 €**



DEKO-LIGHT POWER SUPPLIES | DESIGN OCTO



- plastic housing
- suitable for indoor and outdoor use
- flicker free
- short-circuit proof and overload protection

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price	
862229	black	12V	12W	0-1000mA	15A/200µs	50 x 48 x 24 mm	**24,95 €**	NEW
862230	black	24V	12W	0-500mA	15A/200µs	50 x 48 x 24 mm	**24,95 €**	NEW



DEKO-LIGHT POWER SUPPLIES | DESIGN FLAT



design example

- plastic housing
- suitable for indoor use
- ideal for concealed mounting in ceiling coving
- flicker free
- short-circuit proof and overload protection
- overheat control

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price	
872629	black	12V	6W	0-500mA	7A/300µs	98 x 46 x 11 mm	**18,95 €**	
872632	black	12V	12W	0-1000mA	8A/300µs	128 x 50 x 13 mm	**22,95 €**	
862232	black	12V	20W	0-1670mA	20A/100µs	128 x 50 x 13 mm	**26,95 €**	NEW
862121	black	12V	50W	0-4160mA	15A/300µs	185 x 62 x 22 mm	**59,95 €**	
872630	black	24V	6W	0-250mA	7A/300µs	98 x 46 x 11 mm	**18,95 €**	
862233	black	24V	12W	0-500mA	15A/200µs	128 x 50 x 13 mm	**22,95 €**	NEW
862234	black	24V	20W	0-830mA	20A/100µs	128 x 50 x 13 mm	**26,95 €**	NEW
862122	black	24V	50W	0-2100mA	15A/300µs	185 x 62 x 22 mm	**59,95 €**	





DEKO-LIGHT POWER SUPPLIES | DESIGN LONG-FLAT

design example

- plastic housing
- suitable for indoor use
- ideal for concealed mounting in ceiling coving
- flicker free
- short-circuit proof and overload protection
- overheat control

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price
862123	black	12V	45W	0-3750mA	30A/300µs	251 x 30 x 16 mm	**55,95 €**
862093	white	12V	60W	0-5000mA	30A/300µs	305 x 30 x 17 mm	**69,95 €**
862125	black	12V	100W	0-8340mA	50A/300µs	312 x 30 x 18 mm	**109,95 €**
862172	black	12V	150W	0-12500mA	60A/300µs	335 x 30 x 22 mm	**149,95 €**
862124	black	24V	45W	0-1870mA	30A/300µs	251 x 30 x 16 mm	**55,95 €**
862094	black	24V	60W	0-2500mA	30A/300µs	305 x 30 x 17 mm	**69,95 €**
862126	black	24V	100W	0-4170mA	50A/300µs	312 x 30 x 18 mm	**109,95 €**
862173	black	24V	150W	0-6250mA	60A/300µs	335 x 30 x 22 mm	**149,95 €**



DEKO-LIGHT POWER SUPPLIES | DESIGN BASIC



- plastic housing
- suitable for indoor use
- flicker free
- short-circuit proof and overload protection
- overheat control

design example

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price
862162	black	12V	40W	0-3000 mA	15A/300µs	166 x 52 x 24 mm	**54,95 €**
862127	black	12V	75W	0-6300 mA	15A/300µs	184 x 61 x 32 mm	**82,95 €**
862165	black	12V	100W	0-8300 mA	50A/300µs	184 x 61 x 32 mm	**104,95 €**
862167	black	12V	150W	0-12500 mA	60A/300µs	210 x 67 x 34 mm	**144,95 €**
862163	black	24V	40W	0-1700 mA	15A/300µs	166 x 52 x 24 mm	**54,95 €**
862164	black	24V	75W	0-3100 mA	15A/300µs	184 x 61 x 32 mm	**82,95 €**
862166	black	24V	100W	0-4200 mA	50A/300µs	184 x 61 x 32 mm	**104,95 €**
862168	black	24V	150W	0-6250 mA	60A/300µs	210 x 67 x 34 mm	**144,95 €**



DEKO-LIGHT POWER SUPPLIES | DESIGN IP



- aluminium housing
- suitable for indoor and outdoor use
- flicker free
- short-circuit proof and overload protection
- overheat control

design example

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price
872082	anthrazit	12V	40W	0-3340 mA	30A/300µs	182 x 58 x 30,5 mm	**79,95 €**
872084	anthrazit	12V	75W	0-6250 mA	35A/300µs	186 x 64 x 39 mm	**99,95 €**
872093	anthrazit	12V	100W	0-8340 mA	50A/300µs	186 x 64 x 39 mm	**119,95 €**
872086	anthrazit	12V	150W	0-12500 mA	60A/300µs	191 x 70 x 40 mm	**164,95 €**
872088	anthrazit	12V	200W	0-16600 mA	75A/300µs	249 x 72 x 41 mm	**184,95 €**
872083	anthrazit	24V	40W	0-1670 mA	30A/300µs	182 x 58 x 30,5 mm	**79,95 €**
872085	anthrazit	24V	75W	0-3125 mA	35A/300µs	199 x 67 x 35 mm	**99,95 €**
872094	anthrazit	24V	100W	0-4170 mA	50A/300µs	186 x 64 x 39 mm	**119,95 €**
872087	anthrazit	24V	150W	0-6250 mA	60A/300µs	191 x 70 x 40 mm	**164,95 €**
872089	anthrazit	24V	240W	0-10000 mA	75A/300µs	249 x 72 x 41 mm	**194,95 €**
872091	anthrazit	24V	320W	0-13340 mA	85A/300µs	252 x 90 x 44 mm	**239,95 €**



MEANWELL POWER SUPPLIES NPF-SERIES



design example

- plastic housing
- suitable for indoor and outdoor use
- flicker free
- short-circuit proof and overload protection
- overheat control

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price
872097	black	12V	40W	0-3340mA	50A/270µs	150 x 53 x 35 mm	**84,95 €**
872098	black	12V	60W	0-5000mA	50A/270µs	150 x 53 x 35 mm	**94,95 €**
872099	black	12V	90W	0-7500mA	60A/550µs	171 x 63 x 38 mm	**119,95 €**
872100	black	12V	120W	0-10000mA	60A/520µs	191 x 63 x 38 mm	**139,95 €**
872101	black	24V	40W	0-1670mA	50A/270µs	150 x 53 x 35 mm	**84,95 €**
872102	black	24V	60W	0-2500mA	50A/270µs	150 x 53 x 35 mm	**94,95 €**
872103	black	24V	90W	0-3750mA	60A/550µs	171 x 63 x 38 mm	**119,95 €**
872104	black	24V	120W	0-5000mA	60A/520µs	191 x 63 x 38 mm	**139,95 €**
872105	black	48V	40W	0-840mA	50A/270µs	150 x 53 x 35 mm	**84,95 €**
872106	black	48V	60W	0-1250mA	50A/270µs	150 x 53 x 35 mm	**94,95 €**
872107	black	48V	90W	0-1880mA	60A/550µs	171 x 63 x 38 mm	**119,95 €**
872108	black	48V	120W	0-2500mA	60A/520µs	191 x 63 x 38 mm	**139,95 €**



MEANWELL POWER SUPPLIES ELG/HLG-SERIES



design example

- aluminium housing
- suitable for indoor and outdoor use
- flicker free
- short-circuit proof and overload protection
- overheat control
- output voltage/current adjustable via int. potentiometers

item	colour		voltage	power	electricity	max. inrush current	dimensions L x W x H	price
872116	silver coloured	ELG	48V	75W	0-1600mA	50A/350µs	180 x 63 x 36 mm	**99,95 €**
872119	silver coloured	ELG	48V	150W	0-3130mA	65A/550µs	219 x 63 x 36 mm	**169,95 €**
872122	silver coloured	ELG	48V	240W	0-5000mA	60A/510µs	244 x 71 x 38 mm	**199,95 €**
872125	silver coloured	HLG	48V	600W	0-12500mA	70A/1000µs	280 x 144 x 49 mm	**489,95 €**





ABN SAFETY ISOLATING TRANSFORMER [DC] ACCORDING TO DIN 2006-7 EN 61558-2-6: 2010-04 PRIMARY DIMMABLE

A safety transformer requires stronger or double insulation and stricter checks apply. It is therefore suitable for applications
according to DIN EN 61558 in the area of increased personal protection, e. g. for the operation of luminaires which are installed in swimming pools, fountains, wet cells or similar.



design example

LED SAFETY ISOLATING TRANSFORMER

- dimmable via leading edge
- maximum load: 80% continuous operation
- suitable for indoor and outdoor use

item	colour	voltage	power	dimensions L x W x H	price
872045	black	24V	12 - 60W	150 x 90 x 70 mm	**329,95 €**
872046	black	24V	30 - 150W	176 x 116 x 110 mm	**449,95 €**

220-240 Volt | CV | DC | max 150 Watt | IP67 | 110

DEKO-LIGHT POWER SUPPLIES | DESIGN BASIC PRIMARY DIMMABLE

- plastic housing
- suitable for indoor use
- ideal for upgrate existing installations, as primarily with commercially available rotary / touch dimmers [C-capable, via phase angle or section] dimmable
- cannot be combined with PWM dimmers such as RF, DMX, DALI or KNX
- flicker free
- short-circuit proof and overload protection
- overheat control



design example

item	colour	voltage	power	max. inrush current	dimensions L x W x H	price	
862240	black	12V	2,5 - 25W	10A/100µs	122 x 52 x 30 mm	**64,95 €**	NEW
862220	black	12V	12,0 - 50W	20A/100µs	184 x 61 x 33 mm	**84,95 €**	NEW
862241	black	12V	34,0 - 100W	45A/100µs	210 x 67 x 34 mm	**164,95 €**	NEW
862221	black	24V	2,5 - 25W	10A/100µs	122 x 52 x 30 mm	**64,95 €**	NEW
862222	black	24V	12,0 - 50W	20A/100µs	184 x 61 x 33 mm	**84,95 €**	NEW
862242	black	24V	34,0 - 100W	45A/100µs	210 x 67 x 34 mm	**164,95 €**	NEW



DEKO-LIGHT POWER SUPPLIES | DESIGN IP PRIMARY DIMMABLE

- metal housing
- suitable for indoor and outdoor use
- ideal for upgrate existing installations, as primarily with commercially available rotary / touch dimmers [C-capable, via phase angle or section] dimmable
- cannot be combined with PWM dimmers such as RF, DMX, DALI or KNX
- flicker free
- short-circuit proof and overload protection
- overheat control



design example

item	colour	voltage	power	max. inrush current	dimensions L x W x H	price	
872135	silver coloured	12V	33 - 100W	45A/100µs	191 x 70 x 40 mm	**174,95 €**	NEW
872137	silver coloured	12V	66 - 200W	45A/100µs	249 x 72 x 40 mm	**224,95 €**	NEW
872136	silver coloured	24V	33 - 100W	45A/100µs	191 x 70 x 40 mm	**174,95 €**	NEW
872138	silver coloured	24V	66 - 200W	45A/100µs	249 x 72 x 40 mm	**224,95 €**	NEW





DEKO-LIGHT POWER SUPPLIES | DESIGN IP

- aluminium housing
- suitable for indoor and outdoor use
- short-circuit proof and overload protection
- overheat control
- dimmable via 1 - 10V

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price
872011	silver coloured	12V	150W	0-12500mA	60A/300µs	223 x 70 x 40 mm	**164,95 €**





HEP POWER SUPPLY LAV60W

- metal housing
- suitable for indoor use
- short-circuit proof and overload protection
- overheat control
- dimmable via 1 - 10V

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price
872817	white	24V	60W	0-2500 mA	37,4A/171µs	280 x 30 x 27,5 mm	**91,95 €**





DEKO-LIGHT POWER SUPPLIES | DESIGN BASIC

- aluminium housing
- suitable for indoor use
- short-circuit proof and overload protection
- overheat control
- dimmable via 0-10V / 1-10V, Touch-Dim [Push] or DALI Bus according to IEC 62386

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price
862160	black	12V	200W	0-16700 mA	28A/1250µs	310 x 60 x 45 mm	**219,95 €**
862161	black	24V	200W	0-8300 mA	27A/650µs	310 x 60 x 45 mm	**219,95 €**





design example

MEANWELL POWER SUPPLIES ELG/HLG-SERIES

- aluminium housing
- suitable for indoor and outdoor use
- flicker free
- short-circuit proof and overload protection
- overheat control
- dimmable via 0-10V / 1-10V

item	colour		voltage	power	electricity	max. inrush current	dimensions L x W x H	price
872117	silver coloured	ELG	48V	75W	0-1600mA	50A/350µs	180 x 63 x 36 mm	**104,95 €**
872120	silver coloured	ELG	48V	150W	0-3130mA	65A/550µs	219 x 63 x 36 mm	**169,95 €**
872123	silver coloured	ELG	48V	240W	0-5000mA	60A/510µs	244 x 71 x 38 mm	**199,95 €**
872126	silver coloured	HLG	48V	600W	0-12500mA	70A/1000µs	280 x 144 x 49 mm	**499,95 €**



DEKO-LIGHT POWER SUPPLIES LCP DALI

- plastic housing
- suitable for indoor use
- short-circuit proof and overload protection
- overheat control
- dimmable via DALI2 or DALI1, 10V / 1-10V or Touch-Dim via 230V Taster
- new Intelli-Push function [key combination synchronises all connected power supplies]



design example

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price	
862253	☐ white	12V	40W	0-3400mA	10A/32µs	185 x 42,5 x 28,5 mm	**99,95 €**	NEW
862254	☐ white	12V	75W	0-6250mA	22A/300µs	295 x 40 x 32 mm	**129,95 €**	NEW
862255	☐ white	24V	40W	0-1700mA	10A/32µs	185 x 42,5 x 28,5 mm	**99,95 €**	NEW
862256	☐ white	24V	75W	0-3125mA	22A/300µs	295 x 40 x 32 mm	**129,95 €**	NEW





DEKO-LIGHT POWER SUPPLIES | DESIGN BASIC

- aluminium housing
- suitable for indoor use
- short-circuit proof and overload protection
- overheat control
- dimmable via DALI1, 0-10V, 1-10V or Intelli-Push [Touch-Dim via 230V-Taster]

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price
862160	■ black	12V	200W	0-16700 mA	28A/1250µs	310 x 60 x 45 mm	**219,95 €**
862161	■ black	24V	200W	0-8300 mA	27A/650µs	310 x 60 x 45 mm	**219,95 €**





design example

MEANWELL POWER SUPPLIES ELG-DALI

- aluminium housing
- suitable for indoor and outdoor use
- flicker free
- short-circuit proof and overload protection
- overheat control
- dimmable via DALI1

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price
872118	silver coloured	48V	75W	0-1600mA	50A/350µs	180 x 63 x 36 mm	**119,95 €**
872121	silver coloured	48V	150W	0-3130mA	65A/550µs	219 x 63 x 36 mm	**179,95 €**
872124	silver coloured	48V	240W	0-5000mA	60A/510µs	244 x 71 x 38 mm	**199,95 €**



MEANWELL POWER SUPPLIES PWM KNX



design example

- plastic housing
- suitable for indoor use
- flicker free
- short-circuit proof and overload protection
- overheat control
- dimmable via KNX-Bus

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price	
872109	black	12V	60W	0-5000mA	50A/270µs	150 x 53 x 35 mm	**159,95 €**	
872110	black	12V	120W	0-10000mA	60A/520µs	191 x 63 x 38 mm	**209,95 €**	
872111	black	12V	200W	0-16600mA	70A/520µs	195 x 68 x 40 mm	**244,95 €**	NEW
872112	black	24V	60W	0-2500mA	50A/270µs	150 x 53 x 35 mm	**159,95 €**	
872113	black	24V	120W	0-5000mA	60A/520µs	191 x 63 x 38 mm	**209,95 €**	
872114	black	24V	200W	0-8300mA	70A/520µs	195 x 68 x 40 mm	**244,95 €**	NEW
872115	black	48V	200W	0-4160mA	70A/520µs	195 x 68 x 40 mm	**244,95 €**	NEW



MEANWELL POWER SUPPLIES PWM CASAMBI



design example

- plastic housing
- suitable for indoor use
- flicker free
- short-circuit proof and overload protection
- overheat control
- dimmable via CASAMBI-App

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price	
862249	black	12V	60W	0-5000mA	50A/270µs	150 x 53 x 35 mm	**259,95 €**	NEW
862250	black	12V	120W	0-10000mA	60A/520µs	191 x 63 x 38 mm	**299,95 €**	NEW
862251	black	24V	60W	0-2500mA	50A/270µs	150 x 53 x 35 mm	**259,95 €**	NEW
862252	black	24V	120W	0-5000mA	60A/520µs	191 x 63 x 38 mm	**299,95 €**	NEW



DEKO-LIGHT POWER SUPPLIES HV DMX 2 IN 1




Easy to install and compact DMX unit. A powerful 3 channel dimmer and a 135 Watt power supply are combined in one housing. This makes installation quick and easy. Controllable with all 3 channel control panels and DMX Controllers.

- aluminium housing
- suitable for indoor use
- short-circuit proof and overload protection
- supported DMX 512
- dimmable from 0 - 100%
- flicker free
- with integrated 3-channel DMX dimmer

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price
843274	black	12V	135W	0-11250 mA	23A/320µs	196 x 75 x 40 mm	**194,95 €**
843275	black	24V	135W	0-5630 mA	23A/320µs	196 x 75 x 40 mm	**194,95 €**



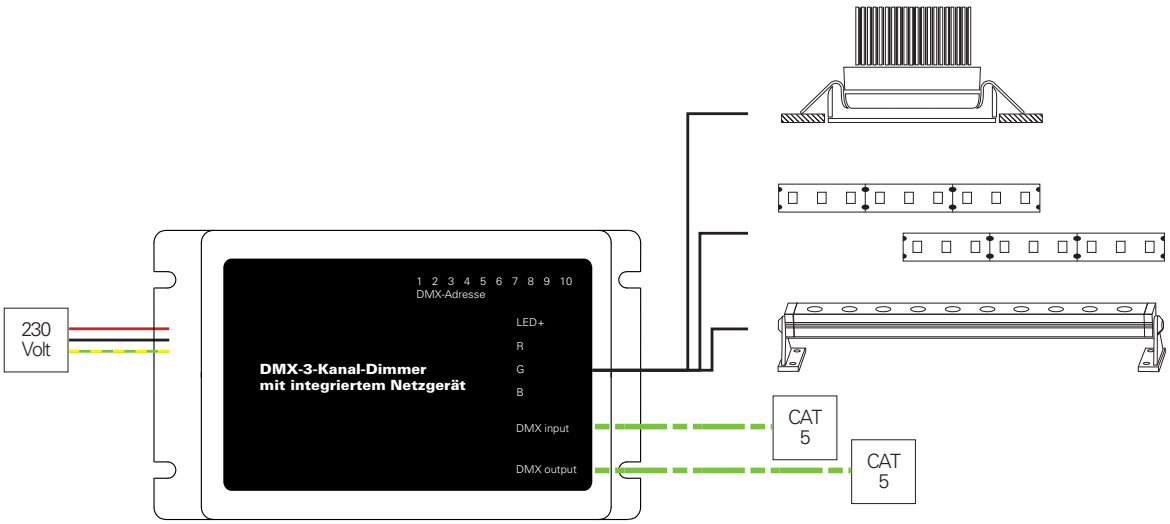

electr. data			dimmable via					usage / design			electrical limit values		power supply	
current strength	power	voltage	leading edge / cut-off	touch dimmer [push]	DALI	KNX	CASAMBI-APP	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
350 mA	1,1-4,0 W	3-12V						x	x	mini	14.32pF	B10A=17, B16A=28, C10A=37, C16A=59	872026	711
350 mA	2,1-4,0 W	6-12V	x					x	x	mini	10.00nF	B10A=35, B16A=56, C10A=74, C16A=118	872132	714
350 mA	0,7-6,0 W	2-18V						x		flat	40.44nF	B10A=17, B16A=28, C10A=37, C16A=59	872628	712
350 mA	3,2-8,0 W	9-23V						x		round	200uF	B10A=17, B16A=28, C10A=37, C16A=59	862212	711
350 mA	3,9-9,0 W	11-26V	x					x		basic		B10A=17, B16A=28, C10A=37, C16A=59	862202	715
350 mA	6,0-10,0 W	17-29V						x		mini		B10A=57, B16A=92, C10A=57, C16A=92	862239	712
350 mA	6,3-12,0 W	18-35V	x					x		basic	20,65pF	B10A=17, B16A=28, C10A=37, C16A=59	862203	715
350 mA	0,7-12,0 W	2-35V						x		flat	194,0uF	B10A=11, B16A=18, C10A=24, C16A=39	862223	712
350 mA	6,3-12,0 W	18-37V	x					x	x	octo	190uF	B10A=35, B16A=56, C10A=74, C16A=118	862235	715
350 mA	8,8-14,7 W	25-42V	x					x		basic		B10A=29, B16A=47, C10A=29, C16A=47	862142	717
350 mA	0,7-18,0 W	2-52V						x		basic	147nF	B10A=17, B16A=28, C10A=37, C16A=59	180512	713
350 mA	9,8-20,0 W	28-57V	x					x		basic		B10A=11, B16A=18, C10A=24, C16A=39	862204	715
350 mA	0,7-20,0 W	2-57V						x		flat	93.04nF	B10A=11, B16A=18, C10A=24, C16A=39	872634	712
450 mA	9,9-20,0 W	22-44V	x					x		quick		B10A=11, B16A=18, C10A=24, C16A=39	862257	716
500 mA	1,0-4,0 W	2-8V						x	x	mini	19.8pF	B10A=17, B16A=28, C10A=37, C16A=59	872065	711
500 mA	2,0-4,0 W	4-8V	x					x	x	mini	4.75nF	B10A=35, B16A=56, C10A=74, C16A=118	872014	714
500 mA	1,0-6,0 W	2-12V						x		flat	38.48nF	B10A=17, B16A=28, C10A=37, C16A=59	862130	712
500 mA	3,0-8,0 W	6-16V						x		round	62.96nF	B10A=11, B16A=18, C10A=24, C16A=39	862128	711
500 mA	1,0-12,0 W	2-24V						x		flat	298uF	B10A=11, B16A=18, C10A=24, C16A=39	862225	712
500 mA	6,5-10,0 W	13-20V						x		mini		B10A=57, B16A=92, C10A=57, C16A=92	862238	712
500 mA	6,0-12,0 W	12-24V	x					x	x	octo	186uF	B10A=35, B16A=56, C10A=74, C16A=118	862236	715
500 mA	1,0-18,0 W	2-38V						x		basic	147nF	B10A=17, B16A=28, C10A=37, C16A=59	180513	713
500 mA	1,0-20,0 W	2-40V						x		flat	192.6nF	B10A=11, B16A=18, C10A=24, C16A=39	862132	712
500 mA	10,0-20,0 W	20-40V	x					x		basic		B10A=11, B16A=18, C10A=24, C16A=39	862205	715
500 mA	15,0-30,0 W	30-60V						x		basic	366nF	B10A=11, B16A=18, C10A=24, C16A=39	862196	713
500 mA	20,0-40,0 W	40-80V						x		basic	356nF	B10A=8, B16A=14, C10A=18, C16A=29	862197	713

electr. data			dimmable via					usage / design			electrical limit values		power supply	
current strength	power	voltage	leading edge / cut-off	touch dimmer [push]	DALI	KNX	CASAMBI-APP	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
500 mA	20,0-40,0 W	40-80V	x					x		basic	29.84nF	B10A=35, B16A=56, C10A=35, C16A=56	862136	715
700 mA	1,7-4,0 W	2-6V						x	x	mini	82pF	B10A=70, B16A=112, C10A=140, C16A=224	872131	711
700 mA	2,0-4,0 W	2,5-6V	x					x	x	mini	10nF	B10A=35, B16A=56, C10A=74, C16A=118	872134	714
700 mA	1,4-6,0 W	2-9V						x		flat	40.44nF	B10A=17, B16A=28, C10A=37, C16A=59	862048	712
700 mA	4,2-8,0 W	6-12V						x		round	46.24nF	B10A=11, B16A=18, C10A=24, C16A=39	862129	711
700 mA	1,4-12,0 W	2-19V						x		flat	190.7nF	B10A=17, B16A=28, C10A=37, C16A=59	862049	712
700 mA	7,0- 12,0 W	10-17V	x					x	x	octo	188uF	B10A=35, B16A=56, C10A=74, C16A=118	862237	715
700 mA	1,4-18,0 W	2-26V						x		basic	147nF	B10A=17, B16A=28, C10A=37, C16A=59	180514	713
700 mA	1,4-20,0 W	2-31V						x		flat	192.6nF	B10A=11, B16A=18, C10A=24, C16A=39	862050	712
700 mA	9,8-20,0 W	14-28V	x					x		basic		B10A=11, B16A=18, C10A=24, C16A=39	862207	715
700 mA	9,1-30,0 W	13-43V						x		basic		B10A=11, B16A=18, C10A=24, C16A=39	862198	713
700 mA	20,3-35,0 W	29-57V						x		basic	359,3nF	B10A=8, B16A=14, C10A=18, C16A=29	862199	713
700 mA	19,6-40,0 W	28-56V	x					x		basic		B10A=35, B16A=56, C10A=35, C16A=56	862208	715
900mA	19,8-40,0 W	22-44V						x		basic	13.5pF	B10A=8, B16A=14, C10A=18, C16A=29	862157	713
1050 mA	9,8-22,0 W	9-20V	x					x		basic	40.72pF	B10A=11, B16A=18, C10A=24, C16A=39	872647	715
1050 mA	9,5-90,0 W	9-28V						x		basic	27.9nF	B10A=35, B16A=56, C10A=35, C16A=56	862133	713
1050 mA	20,0-40,0 W	19-38V						x		basic		B10A=8, B16A=14, C10A=18, C16A=29	862201	713
1050 mA	20,0-40,0 W	19-38V	x					x		basic		B10A=35, B16A=56, C10A=35, C16A=56	862209	715
1050 mA	23,5-45,0 W	22-43V	x					x		basic	33,46nF	B10A=35, B16A=56, C10A=35, C16A=56	862210	715
1050 mA	23,1-45,0 W	22-43V	x					x		quick	33,46nF	B10A=35, B16A=56, C10A=35, C16A=56	862256	704
1300 mA	26,0-50,0 W	20-39V	x					x		basic		B10A=35, B16A=56, C10A=35, C16A=56	862211	715
1400 mA	19,6-40,0 W	14-28V	x					x		basic	20.8nF	B10A=35, B16A=56, C10A=35, C16A=56	862138	715
1500 mA	30,0-60,0 W	20-40V	x					x		quick		B10A=11, B16A=18, C10A=24, C16A=39	862259	716

power supplies design



mini round / octo flat basic long-flat IP * special design


electr. data			dimmable via					usage / design			electrical limit values		power supply	
current strength	power	voltage	leading edge / cut-off	touch dimmer [push]	DALI	KNX	CASAMBI-APP	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
MULTI*	3,2-20,0 W	9-40V	x					x		basic		B10A=46, B16A=74, C10A=93, C16A=149	862141	717
MULTI*	3,2-12,0 W	15-54V		x	x			x		basic		B10A=23, B16A=37, C10A=46, C16A=74	862190	719
MULTI*	5,0-25,0 W	20-60V		x	x			x		basic		B10A=23, B16A=37, C10A=46, C16A=74	862191	719
MULTI*	8,75-45,0 W	21-70V		x	x			x		basic		B10A=12, B16A=20, C10A=25, C16A=40	862192	719
MULTI*	14,7-45,0 W	14-43V		x	x			x		basic		B10A=12, B16A=20, C10A=25, C16A=40	862193	719
MULTI*	26,3-75,5 W	25-71V		x	x			x		basic		B10A=3, B16A=5, C10A=6, C16A=10	862194	719
MULTI*	2,1-25,2 W	6-54V		x	x			x		*		B10A=16, B16A=26, C10A=27, C16A=44	862246	720
MULTI*	0,70 - 42,00 W	2-100V		x	x			x		*		B10A=16, B16A=26, C10A=27, C16A=44	862247	720
MULTI*	1,0-60,3 W	2-90V		x	x			x		*		B10A=15, B16A=25, C10A=20, C16A=32	862248	720
MULTI*	2,1-25,2 W	6-54V		x		x		x		*		B10A=16, B16A=26, C10A=27, C16A=44	862174	721
MULTI*	0,7-42,0 W	2-100V		x		x		x		*		B10A=16, B16A=26, C10A=27, C16A=44	862175	721
MULTI*	1,0-60,3 W	2-90V		x		x		x		*		B10A=15, B16A=25, C10A=20, C16A=32	862176	721
MULTI*	2,1-25,2 W	6-54V		x			x	x		*		B10A=16, B16A=26, C10A=27, C16A=44	862243	722
MULTI*	0,7-42,0 W	2-100V		x			x	x		*		B10A=16, B16A=26, C10A=27, C16A=44	862244	722
MULTI*	1,0-60,3 W	2-90V		x			x	x		*		B10A=15, B16A=25, C10A=20, C16A=32	862245	722

* Due to the large number of possible settings, please refer to the detailed technical data on the specified product page.

TIPS AND TRICKS FOR CURRENT-STABLE POWER SUPPLIES

In contrast to voltage-stable power supplies [CV], current-stable power supply units, often abbreviated to CC [constant current], the output current is stable. This important factors that must be taken into focus during planning and installation.

- Do not connect LEDs to CC power supply units below voltage, as this can damage them and cause them to fail after a short period of operation.
- if possible: 1 luminaire = 1 power supply
- if necessary: operate max. 2 luminaires in a series connection on one power supply unit.
  However, the voltage range and the power of the power supply must be checked carefully.

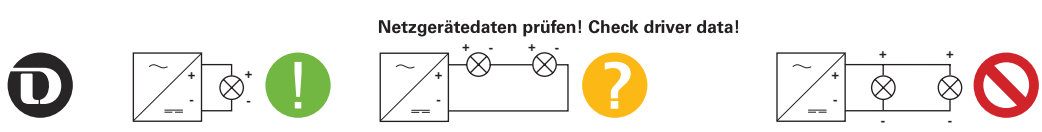

Installationshinweis für Netzgerät stromstabil [CC]: LED nicht unter Spannung anschließen!
installation instruction for power supply constant current [CC]: Don't connect LED under voltage!



DEKO-LIGHT POWER SUPPLIES | DESIGN MINI

- plastic housing
- suitable for indoor and outdoor use
- short-circuit proof and overload protection

item	colour	electricity	power	voltage	max. inrush current	dimensions L x W x H	price	
872026	black	350mA	1,10-4,00W	3-12V	10A/300µs	38 x 27 x 21 mm	**13,95 €**	
872065	black	500mA	1,00-4,00W	2-8V	10A/300µs	38 x 27 x 21 mm	**13,95 €**	
872131	black	700mA	1,70-4,00W	2-6V	10A/100µs	38 x 27 x 21 mm	**13,95 €**	NEW





DEKO-LIGHT POWER SUPPLIES | DESIGN ROUND

- plastic housing
- suitable for indoor use
- short-circuit proof and overload protection

item	colour	electricity	power	voltage	max. inrush current	dimensions L x W x H	price
862212	black	350mA	3,20-8,00W	9-23V	10A/300µs	53 x 22 mm	**23,95 €**
862128	black	500mA	3,00-8,00W	6-16V	8A/300µs	53 x 22 mm	**23,95 €**
862129	black	700mA	4,20-8,00W	6-12V	8A/300µs	53 x 22 mm	**23,95 €**






design example

DEKO-LIGHT POWER SUPPLIES | DESIGN FLAT

- plastic housing
- suitable for indoor use
- flicker free
- short-circuit proof and overload protection

item	colour	electricity	power	voltage	max. inrush current	dimensions L x W x H	price	
872628	black	350mA	0,70-6,00W	2-18V	10A/300µs	98 x 46 x 11 mm	**18,95 €**	
862223	black	350mA	0,70-12,00W	2-35V	10A/100µs	128 x 50 x 13 mm	**25,95 €**	NEW
872634	black	350mA	0,70-20,00W	2-57V	15A/300µs	154 x 50 x 14 mm	**31,95 €**	
862130	black	500mA	1,00-6,00W	2-12V	10A/300µs	98 x 46 x 11 mm	**18,95 €**	
862225	black	500mA	1,00-12,00W	2-24V	10A/100µs	128 x 50 x 13 mm	**25,95 €**	NEW
862132	black	500mA	1,00-20,00W	2-40V	15A/300µs	154 x 50 x 14 mm	**31,95 €**	
862048	black	700mA	1,40-6,00W	2-9V	10A/300µs	98 x 46 x 11 mm	**18,95 €**	
862049	black	700mA	1,40-12,00W	2-19V	12A/300µs	128 x 50 x 14 mm	**25,95 €**	
862050	black	700mA	1,40-20,00W	2-31V	15A/300µs	128 x 50 x 14 mm	**31,95 €**	




HEP POWER SUPPLIES G5S10W



- plastic housing
- suitable for indoor use
- flicker free
- short-circuit proof and overload protection

item	colour	electricity	power	voltage	max. inrush current	dimensions L x W x H	price	
862239	white	350mA	6,0-10,0W	17 - 29V	4,7A/30µs	58 x 39 x 20 mm	**26,95 €**	NEW
862238	white	500mA	6,5-10,0W	13 - 20V	4,7A/30µs	58 x 39 x 20 mm	**26,95 €**	NEW





design example

DEKO-LIGHT POWER SUPPLIES | DESIGN BASIC

- plastic housing
- suitable for indoor use
- flicker free
- short-circuit proof and overload protection

item	colour	electricity	power	voltage	max. inrush current	dimensions L x W x H	price	
180512	black	350mA	0,70-18,00W	2-52V	10A/300µs	115 x 45 x 21 mm	**26,95 €**	
180513	black	500mA	1,00-18,00W	2-38V	10A/300µs	115 x 45 x 21 mm	**26,95 €**	
862196	black	500mA	15,00-30,00W	30-60V	8A/300µs	127 x 43 x 28 mm	**31,95 €**	NEW
862197	black	500mA	20,00-40,00W	40-80V	20A/300µs	127 x 43 x 28 mm	**33,95 €**	NEW
180514	black	700mA	1,40-18,00W	2-26V	10A/300µs	115 x 45 x 21 mm	**26,95 €**	
862198	black	700mA	9,10-30,00W	13-43V	8A/300µs	142 x 50 x 24 mm	**31,95 €**	
862199	black	700mA	20,30-40,00W	29-57V	20A/300µs	127 x 43 x 28 mm	**33,95 €**	NEW
862157	black	900mA	19,80-40,00 W	22-44V	20A/300µs	127 x 43 x 28 mm	**33,95 €**	
862133	black	1050mA	9,50-30,00W	9-28V	5A/300µs	142 x 50 x 24 mm	**31,95 €**	
862201	black	1050mA	12,60-40,00W	12-38V	20A/300µs	142 x 50 x 24 mm	**33,95 €**	





DEKO-LIGHT POWER SUPPLIES | DESIGN MINI



- plastic housing
- suitable for indoor and outdoor use
- short-circuit proof and overload protection
- dimmable with compatible [C-capable] trailing or leading edge phase dimmers

item	colour	electricity	power	voltage	max. inrush current	dimensions L x W x H	price	
872132	black	350mA	2,10-4,00W	6-12V	5A/100µs	50 x 31 x 21 mm	**20,95 €**	NEW
872014	black	500mA	2,00-4,00W	4-8V	5A/300µs	50 x 27 x 21 mm	**20,95 €**	
872134	black	700mA	2,00-4,00W	2,5-6V	5A/100µs	50 x 31 x 21 mm	**20,95 €**	NEW



POWER SUPPLIES
DC | CC
dimmable

DEKO-LIGHT POWER SUPPLIES | DESIGN OCTO



- plastic housing
- suitable for indoor and outdoor use
- short-circuit proof and overload protection
- dimmable with compatible [C-capable] phase cut-off dimmers

item	colour	electricity	power	voltage	max. inrush current	dimensions L x W x H	price	
862235	black	350mA	6,30-12,00W	18-37V	5A/100µs	50 x 48 x 24 mm	**32,95 €**	NEW
862236	black	500mA	6,00-12,00W	12-24V	5A/100µs	50 x 48 x 24 mm	**32,95 €**	NEW
862237	black	700mA	7,00-12,00W	10-17V	5A/100µs	50 x 48 x 24 mm	**32,95 €**	NEW



DEKO-LIGHT POWER SUPPLIES | DESIGN BASIC



design example

- plastic housing
- suitable for indoor use
- short-circuit proof and overload protection
- overheat control
- dimmable with compatible [C-capable] phase cut-off dimmers

item	colour	electricity	power	voltage	max. inrush current	dimensions L x W x H	price
862202	black	350mA	3,90-9,00W	11- 26V	10A/300µs	115 x 39 x 22 mm	**31,95 €**
862203	black	350mA	6,30-12,00W	18-35V	10A/300µs	115 x 39 x 22 mm	**39,95 €**
862204	black	350mA	9,80-20,00W	28,57V	15A/300µs	127 x 44 x 28 mm	**44,95 €**
862205	black	500mA	10,00-20,00W	20-40V	15A/300µs	127 x 44 x 28 mm	**46,95 €**
862136	black	500mA	20,00-40,00W	40-80V	5A/300µs	166 x 52 x 24 mm	**53,95 €**
862207	black	700mA	9,80-20,00W	14-28V	15A/300µs	127 x 44 x 28 mm	**46,95 €**
862208	black	700mA	19,60-40,00W	28-56V	5A/300µs	166 x 52 x 24 mm	**53,95 €**
872647	black	1050mA	9,80-22,00W	9-20V	15A/300µs	127 x 44 x 28 mm	**46,95 €**
862209	black	1050mA	20,00-40,00W	19-38V	5A/300µs	166 x 52 x 25 mm	**53,95 €**
862210	black	1050mA	23,50-45,00W	22-43V	5A/100µs	166 x 52 x 25 mm	**59,95 €**
862211	black	1300mA	26,00-50,00W	20-39V	5A/300µs	166 x 52 x 25 mm	**68,95 €**
862138	black	1400mA	19,60-40,00W	14-28V	5A/300µs	166 x 52 x 24 mm	**53,95 €**





design example



quick installation
with through-wiring

DEKO-LIGHT POWER SUPPLIES | DESIGN QUICK

- plastic housing
- suitable for indoor use
- flicker free
- short-circuit proof and overload protection
- overheat control
- particularly easy and quick to install due to integrated 3-pole through-wiring
- no additional installation material necessary
- dimmable with compatible [C-capable] phase cut-off dimmers

item	colour	electricity	power	voltage	max. inrush current	dimensions L x W x H	price	
862257	black	450mA	9,90-20,00W	22-44V	15A/300µs	184 x 51 x 32 mm	**36,95 €**	NEW
862258	black	1050mA	23,10-45,00W	22-43V	5A/100µs	184 x 51 x 32 mm	**46,95 €**	NEW
862259	black	1500mA	30,00-60,00W	20-40V	5A/100µs	184 x 51 x 32 mm	**56,95 €**	NEW





HEP POWER SUPPLY LMTC15W350LR-Z

- dimmable via leading edge or phase cut-off
- suitable for indoor use

item	colour	electricity	power	voltage	max. inrush current	dimensions L x W x H	price
862142	white	350mA	8,80-14,70W	25 - 42V	15A/28µs	115 x 40,4 x 25 mm	**35,95 €**



DEKO-LIGHT POWER SUPPLY | BASIC MULTI-CURRENT



- plastic housing
- suitable for indoor use
- flicker free
- short-circuit proof and overload protection
- current range adjustable
- dimmable with compatible [C-capable] trailing or leading edge phase dimmers

item	colour	electricity	power	voltage	max. inrush current	dimensions L x W x H	price
862141	white	350mA	3,20 - 14,00W	9-40V	15A/90µs	150 x 43 x 28 mm	**46,95 €**
		400mA	3,60 - 16,00W	9-40V			
		450mA	4,00 - 18,00W	9-40V			
		500mA	4,50 - 20,00W	9-40V			
		550mA	5,00 - 19,80W	9-36V			
		600mA	5,40 - 19,80W	9-33V			
		650mA	5,90 - 19,50W	9-30V			
		700mA	6,30 - 19,60W	9-28V			



DEKO-LIGHT MULTI-CURRENT DALI 2.0 POWER SUPPLIES DALI 2 IE-12D| IE-25D | IE-45D | IE-45HD| IE-75D

A must for every electrician: the new MULT-CC DALI 2.0 power supplies from DEKO-LIGHT are a real all-purpose weapon for universal use.

They can be controlled via DALI1 or DALI2 [fully upward and downward compatible] or via Intelli-Push. In this case, the multi-current-power supplies do not require any additional control components and are controlled by means of cost-effective 230V standard push-buttons. With the new Intelli-Push function, they also have a pioneering synchronisation option if one of the connected power supplies no longer runs synchronously with the others.

In addition, the MULTI-power supplies can also be operated undimmed without control as a reliable and universal power supplier. With a total of five models, the new DALI series covers a CC current range from 180mA to 1600mA and power ratings from 4 to 75 watts.

- plastic housing
- compact housing design
- suitable for indoor use
- flicker free
- short-circuit proof and overload protection
- overheat control
- current range adjustable via DIP switch
- DALI 2 BUS ready according to IEC 62386
- fully downward compatible with DALI 1
- dimming range: 1-100%
- dimmable via DALI or touch dimmer function [push] new Intelli-Push function [key combination synchronises all connected power supplies]
- can also be operated without control as universal power supply unit universal power supply [no dimming function]
- 3.2-75 watts and 37 CC variants in only 3 different housing sizes




design example 114 x 52 x 24 mm



design example 139 x 75 x 30 mm



design example 159 x 79 x 30 mm



controllable with DALI2, DALI1
or by touch dim using
a regular 230V push-button

TOUCH-DIM / INTELLI-PUSH VIA 230V PUSH BUTTON WITHOUT ADDITIONAL CONTROL:

press button short	switch lamp on/off
press button long	dim lamp bright/dark/bright
press button for 15 seconds	All connected power supplies are synchronised to the same brightness.

item	colour	electricity	power	voltage	max. inrush current	dimensions L x W x H	price
862190	black	180mA	3,20 - 9,80W	18 - 54V	30A/300µs	114 x 52 x 24 mm	**64,95 €**
		230mA	4,00 - 12,00W	18 - 52V			
		260mA	4,00 - 12,00W	15 - 46V			
		300mA	4,50 - 12,00W	15 - 42V			
		350mA	4,20 - 12,00W	15 - 34V			
		400mA	6,00 - 12,00W	15 - 30V			
		450mA	5,40 - 12,00W	15 - 27V			
		500mA	7,50 - 12,00W	15 - 24V			
862191	black	260mA	5,00 - 15,50W	20 - 60V	30A/300µs	114 x 52 x 24 mm	**69,95 €**
		350mA	7,00 - 20,00W	20 - 60V			
		400mA	8,00 - 24,00W	20 - 60V			
		450mA	9,00 - 25,00W	20 - 55V			
		500mA	10,00 - 25,00W	20 - 50V			
		550mA	11,00 - 25,00W	20 - 45V			
		600mA	12,00 - 25,00W	20 - 42V			
		700mA	14,00 - 25,00W	20 - 36V			
862192	black	350mA	8,75 - 24,50W	25 - 70V	55A/100µs	139 x 75 x 30 mm	**74,95 €**
		500mA	12,50 - 35,00W	25 - 70V			
		600mA	15,00 - 42,00W	25 - 70V			
		700mA	17,50 - 45,00W	25 - 64V			
		800mA	20,00 - 45,00W	25 - 56V			
		900mA	22,50 - 45,00W	25 - 50V			
		1050mA	25,00 - 45,00W	21 - 43V			
862193	black	1050mA	14,70 - 45,00W	14 - 43V	55A/100µs	139 x 75 x 30 mm	**74,95 €**
		1150mA	16,10 - 45,00W	14 - 39V			
		1200mA	16,80 - 45,00W	14 - 38V			
		1300mA	18,20 - 45,00W	14 - 35V			
		1400mA	19,60 - 45,00W	14 - 32V			
		1500mA	21,00 - 45,00W	14 - 30V			
		1600mA	22,40 - 45,00W	14 - 28V			
862194	black	1050mA	26,30 - 74,50W	25 - 71V	55A/300µs	159 x 79 x 30 mm	**91,95 €**
		1150mA	28,80 - 74,80W	25 - 65V			
		1200mA	30,00 - 74,40W	25 - 62V			
		1300mA	32,50 - 75,50W	25 - 58V			
		1400mA	35,00 - 74,20W	25 - 53V			
		1500mA	37,50 - 75,00W	25 - 50V			
		1600mA	40,00 - 75,20W	25 - 47V			





design example

MEANWELL LCM DALI-POWER SUPPLIES 25DA2 | 40DA2 | 60DA2

- current range via DIP switch adjustable
- Dali Bus ready according to IEC 62386
- dimmable via DALI2, DALI1 or Intelli-Push [Touch-Dim via 230V push-button]
- master/slave operation of several power supplies via Sync cable [accessories]
- suitable for indoor use

item	colour	electricity	power	voltage	max. inrush current	dimensions L x W x H	price	
862246	☐ white	350mA	2,10 - 18,90W	6 - 54V	20A/260µs	105 x 68 x 23 mm	**89,95 €**	NEW
		500mA	3,00 - 25,20W	6 - 50V				
		600mA	3,60 - 25,20W	6 - 42V				
		700mA	4,20 - 25,20W	6 - 36V				
		900mA	5,40 - 25,20W	6 - 28V				
		1050mA	6,30 - 25,20W	6 - 24V				
862247	☐ white	350mA	0,70 - 35,00W	2 - 100V	20A/260µs	124 x 82 x 23 mm	**104,95 €**	NEW
		500mA	1,00 - 40,00W	2 - 80V				
		600mA	1,20 - 40,00W	2 - 67V				
		700mA	1,40 - 40,00W	2 - 57V				
		900mA	1,80 - 40,50W	2 - 45V				
		1050mA	2,10 - 42,00W	2 - 40V				
862248	☐ white	500mA	1,00 - 45,00W	2 - 90V	20A/260µs	124 x 82 x 23 mm	**109,95 €**	NEW
		600mA	1,20 - 54,00W	2 - 90V				
		700mA	1,40 - 60,30W	2 - 86V				
		900mA	1,80 - 60,30W	2 - 67V				
		1050mA	2,10 - 59,90W	2 - 57V				
		1400mA	2,80 - 59,00W	2 - 42V				



Zubehör

930412	SYNC cable for synchronisation of max. 10 power supply units with push function, length 300 cm	**9,95 €**



design example

MEANWELL LCM KNX-POWER SUPPLIES 25KN | 40KN | 60KN

- current range via DIP switch adjustable
- KNX/EIB BUS eady
- suitable for indoor use
- flicker free

item	colour	electricity	power	voltage	max. inrush current	dimensions L x W x H	price
862174	☐ white	350 mA	2,10 - 18,90W	6 - 54V	20A/260µs	105 x 68 x 23 mm	**134,95 €**
		500 mA	3,00 - 25,20W	6 - 50V			
		600 mA	3,60 - 25,20W	6 - 42V			
		700 mA	4,20 - 25,20W	6 - 36V			
		900 mA	5,40 - 25,20W	6 - 28V			
		1050 mA	6,30 - 25,20W	6 - 24V			
862175	☐ white	350 mA	0,70 - 35,00W	2 - 100V	20A/260µs	124 x 82 x 23 mm	**144,95 €**
		500 mA	1,00 - 40,00W	2 - 80V			
		600 mA	1,20 - 40,00W	2 - 67V			
		700 mA	1,40 - 40,00W	2 - 57V			
		900 mA	1,80 - 40,50W	2 - 45V			
		1050 mA	2,10 - 42,00W	2 - 40V			
862176	☐ white	500 mA	1,00 - 45,00W	2 - 90V	20A/260µs	124 x 82 x 23 mm	**154,95 €**
		600 mA	1,20 - 54,00W	2 - 90V			
		700 mA	1,40 - 60,30W	2 - 86V			
		900 mA	1,80 - 60,30W	2 - 67V			
		1050 mA	2,10 - 59,90W	2 - 57V			
		1400 mA	2,80 - 59,00W	2 - 42V			





design example

MEANWELL LCM CASAMBI POWER SUPPLIES 25BLE | 40BLE | 60BLE

- suitable for indoor use
- current range via DIP switch adjustable
- dimmable via CASAMBI app or touch dim via 230V push-button
- flicker free

item	colour	electricity	power	voltage	max. inrush current	dimensions L x W x H	price	
862243	☐ white	350mA	2,10 - 18,90W	6 - 54V	20A/260µs	105 x 68 x 23 mm	**239,95 €**	NEW
		500mA	3,00 - 25,20W	6 - 50V				
		600mA	3,60 - 25,20W	6 - 42V				
		700mA	4,20 - 25,20W	6 - 36V				
		900mA	5,40 - 25,20W	6 - 28V				
		1050mA	6,30 - 25,20W	6 - 24V				
862244	☐ white	350mA	0,70 - 35,00W	2 - 100V	20A/260µs	124 x 82 x 23 mm	**249,95 €**	NEW
		500mA	1,00 - 40,00W	2 - 80V				
		600mA	1,20 - 40,00W	2 - 67V				
		700mA	1,40 - 40,00W	2 - 57V				
		900mA	1,80 - 40,50W	2 - 45V				
		1050mA	2,10 - 42,00W	2 - 40V				
862245	☐ white	500mA	1,00 - 45,00W	2 - 90V	20A/260µs	124 x 82 x 23 mm	**259,95 €**	NEW
		600mA	1,20 - 54,00W	2 - 90V				
		700mA	1,40 - 60,30W	2 - 86V				
		900mA	1,80 - 60,30W	2 - 67V				
		1050mA	2,10 - 59,90W	2 - 57V				
		1400mA	2,80 - 59,00W	2 - 42V				





TCI POWER SUPPLY JOLLY MD PUSH

- suitable for indoor use
- constant current [CC] or constant voltage [CV] adjustable via DIP switch
- dimmable via leading edge or push [Touch dim via 230V push button]
- master/slave operation of several power supplies via sync cable [accessories]

item	colour	operating mode	electricity	power	voltage	dimensions L x W x H	price
561201	☐ white					165 x 48 x 35 mm	**96,95 €**
		stromkonstant	350mA	0,70 - 16,50W	2 - 47V		
			500mA	1,00 - 23,50W	2 - 47V		
			550mA	1,10 - 25,90W	2 - 47V		
			700mA	1,40 - 32,00W	2 - 46V		
			750mA	1,50 - 32,00W	2 - 43V		
		spannungskonstant	12V	10W			
			24V	20W			
			28V	22W			



Zubehör

561202 SYNC cable for synchronisation of max. 10 power supply units with push function, length 150 cm **10,95 €**

electr. data		dimmable via				usage / design			electrical limit values		power supply	
current strength	power	electronic power supply	conventional transformer	leading edge	leading edge / cut-off	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
electronic transformers:												
12V	0,0-70,0 W	x			x	x		basic	97.79nF	B10A=8, B16A=14, C10A=18, C16A=29	180515	725
12V	20,0-70,0 W	x			x	x		basic		B10A=8, B16A=14, C10A=8, C16A=14	862187	725
12V	0,0-105,0 W	x			x	x		basic	139.58nF	B10A=5, B16A=9, C10A=12, C16A=19	180529	725
12V	34,0-105,0 W	x			x	x		basic		B10A=8, B16A=14, C10A=8, C16A=14	862188	725
12V	50,0-150,0 W	x			x	x		basic		B10A=8, B16A=14, C10A=8, C16A=14	862189	725
wound transformers:												
12V	11,5-20,0 W		x	x		x		*			000097	726
12V	34,5-60,0 W		x	x		x		*			000099	726
12V	43,5-75,0 W		x	x		x	x	*			000140	726
12V	60,5-105,0 W		x	x		x		*			000107	726
12V	86,5-150,0 W		x	x		x		*			000103	726
12V	86,5-150,0 W		x	x		x	x	*			000141	726
12V	115,0-200,0 W		x	x		x		*			000104	726
12V	172,5-300,0 W		x	x		x		*			000106	726
12V	172,5-300,0 W		x	x		x	x	*			000142	726
12V	287,5-500,0 W		x	x		x		*			000109	726

power supplies design



mini round / octo flat basic long-flat IP * special design

DEKO-LIGHT TRANSFORMATOR ULTRA HALOGEN 12 VOLT / AC

- electronic transformer [12V]
- lamp protection voltage
- plastic housing
- suitable for indoor use
- flicker free
- short-circuit proof and overload protection
- dimmable with compatible [C-capable] trailing or leading edge phase dimmers
- **180515**: 0-70W halogen bulbs or 0-50W / max. 6 LED illuminants
- **180529**: 0-105W halogen bulbs or 0-50W / max. 6 LED illuminants



design example

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price
180515	black	12V	0 - 70W	0-5830 mA	20A/300µs	115 x 45 x 28 mm	**19,95 €**
180529	black	12V	0 - 105W	0-8750mA	30A/300µs	115 x 45 x 28 mm	**24,95 €**



OSRAM HALOTRONIC MOUSE TRANSFORMATOR 12 VOLT / AC

The Osram Halotronic Mouse Transformer is ideal for confined spaces. The Halotronic Mouse series is dimmable via leading or trailing edge dimmers. With the 150VA version, you have the option of primarily looping on using two pairs of terminals.





- electronic transformer [12V]
- lamp protection voltage
- plastic housing
- suitable for indoor use
- short-circuit proof and overload protection
- dimmable with compatible [C-capable] trailing or leading edge phase dimmers

item	colour	voltage	power	electricity	max. inrush current	dimensions L x W x H	price
862187	white	12V	20 - 70W	1785-6250 mA	5A/300µs	108 x 52 x 33 mm	**36,95 €**
862188	white	12V	34 - 105W	3100-9300 mA	7,5A/300µs	108 x 52 x 33 mm	**39,95 €**
862189	white	12V	50 - 150W	4390-13160 mA	11A/300µs	153 x 54 x 36 mm	**60,95 €**



ABN TRANSFORMATOREN 12 VOLT / AC



design example

- conventional transformer
- lamp protection voltage
- dimmable via leading edge
- suitable for indoor use

item	colour	voltage	power	dimensions L x W x H	price
000097	white	20VA	11,50 - 20,00 W	82 x 56 x 50 mm	**36,95 €**
000099	white	60VA	34,50 - 60,00 W	100 x 70 x 61 mm	**54,95 €**
000107	white	105VA	60,50 - 105,00 W	107 x 78 x 66 mm	**74,95 €**
000103	white	150VA	86,50 - 150,00 W	130 x 88 x 78 mm	**84,95 €**
000104	white	200VA	115,00 - 200,00 W	130 x 88 x 88 mm	**94,95 €**
000106	white	300VA	172,50 - 300,00 W	130 x 88 x 103 mm	**124,95 €**
000109	white	500VA	287,50 - 500,00 W	177 x 107 x 130 mm	**224,95 €**



optional accessories	transformer housing Pyra	
000110	for 105 W	**19,95 €**
000111	for 150-300 W	**19,95 €**






design example

ABN TRANSFORMERS 12 VOLT / AC

- conventional transformer
- lamp protection voltage
- 1,9 m connection cable [primary]
- 0,5 m connection cable [secondary]
- dimmable via leading edge
- suitable for indoor and outdoor use

item	colour	voltage	power	dimensions L x W x H	price
000140	black	75VA	43,50 - 75,00 W	108 x 81 x 66 mm	**89,95 €**
000141	black	150VA	86,50 - 150,00 W	130 x 93 x 78 mm	**109,95 €**
000142	black	300VA	172,50 - 300,00 W	130 x 93 x 102 mm	**149,95 €**



ELECTRONICAL BALLAST
other
not dimmable

OSRAM HQI ELECTRONICAL BALLAST PTI70




- for 70W metal vapour lamps
- dimensions L x W x H: 171 x 83 x 32 mm
- automatic safety shutdown in case of lamp damage
- incl. pull relief
- suitable for indoor use

item	colour	price
150921	white	**84,95 €**

220-240 Volt | 70 Watt | IP20 | 110


HEP HQI ELECTRONICAL BALLAST SH70GB

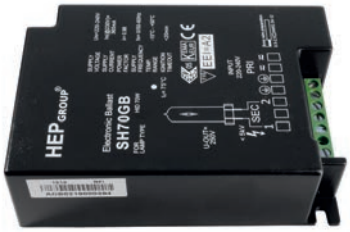

- für 70W metal vapour lamps
- dimensions L x W x H: 110 x 75 x 32 mm
- suitable for indoor use

item	colour	price
800030	black	**84,95 €**

220-240 Volt | 70 Watt | IP20 | 110

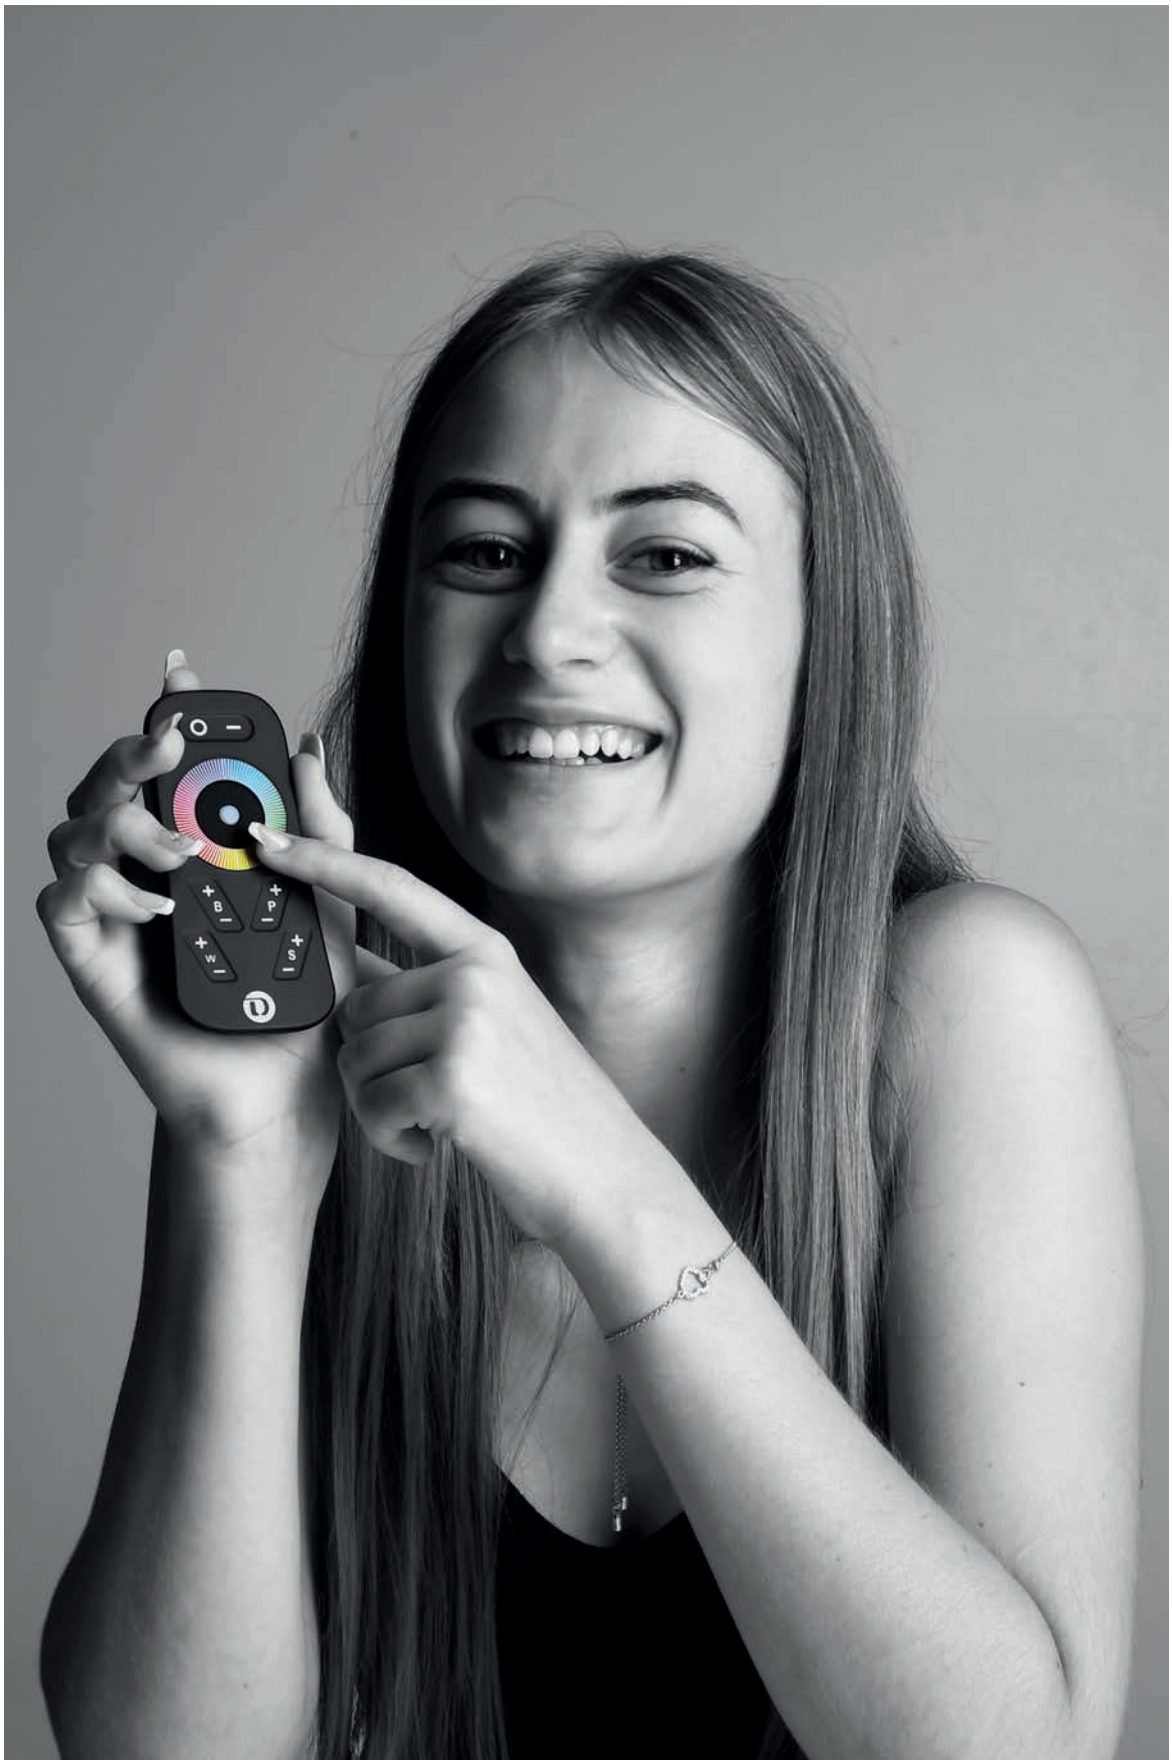
B
P
W
S

CONTROLLER

732 Quasar
740 Casambi Bluetooth
742 RF controller | 1 - 4 channel
744 RF touchpanel | 1 - 4 channel
746 quick finder | DMX controller
747 quick finder | DMX dimmer
748 DMX wall controller
752 DMX controller
754 DMX dimmer
758 DALI PWM dimmer



Quasar
page 734



Quasar
page 735



Quasar
page 737



Quasar
page 738



Casambi Bluetooth
page 740



Casambi Bluetooth
page 740



Casambi Bluetooth
page 741



Casambi Bluetooth
page 741



RF controller | 1 - 4 channel
from page 742



RF touchpanel | 1 - 4 channel
from page 744



DMX wall controller
page 748



DMX wall controller
page 748



DMX wall controller
page 749



DMX wall controller
page 750



DMX wall controller
page 750



DMX wall controller
page 751



DMX controller
page 752



DMX controller
page 753



DMX dimmer
page 754



DMX dimmer
page 754



DMX dimmer
page 755



DMX dimmer
page 755



■ DMX dimmer
page 755



■ DMX dimmer
page 756



■ DMX dimmer
page 756



■ DMX dimmer
page 757



■ DMX dimmer
page 757



□ DALI PWM dimmer
page 758



□ DALI PWM dimmer
page 758



□ DALI PWM dimmer
page 759

controller

DEKO-LIGHT QUASAR –
THE SMART UNIVERSAL CONTROL FOR LIGHT & CO.

Our new and universal Bluetooth control »Quasar« enables you to use and control all common lighting components such as lights, lamps, LED strips etc. as well as electrical devices with 230V mains voltage.


You decide whether you want to do this conveniently via smartphone, tablet and / or light switches. Through the integrated inputs for conventional light switches, »Quasar« can be perfectly integrated into an existing electrical installation and thus also into the existing switch range. It does not matter whether you want to plan, modernize or expand a new building.


Thanks to the pre-configured Quasar modules [see Fig.] installation and commissioning are child's play. Immediately after connection, all necessary function tests of the connected components can be carried out. This reduces installation costs and increases efficiency.

With the app, we also made sure to create a user-friendly and intuitive user interface. It controls both all standard functions that are also available when operated with switches, as well as the many additional and automatic functions that make your lighting control system »smart«and comfortable. So there are almost no limits to your imagination.

Speaking of limits – thanks to the latest Multi-Protocol-Mesh-Technology and the interaction of the individual modules, these automatically connect to form a network with which even complex lighting control networks with extensive requirement profiles can be set up. Every module is part of the network and thus also extends the range of the radio network, but can also be completely independent.

Quasar is simple, flexible, comfortable, safe and incredibly smart.

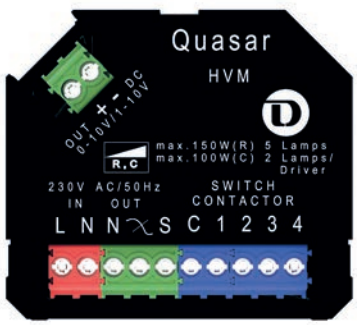

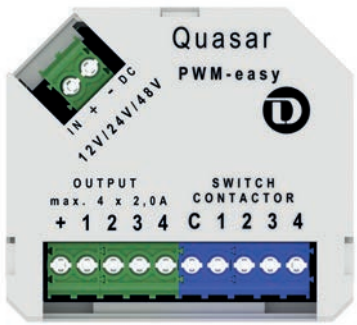




original size













WHAT CAN QUASAR CONTROL?

By using the two modules [see pages 802-805] there are countless connection options for almost all types of common lights, illuminants and components. From conventional light bulbs, LED / retro-Fit lamps, LED lights with permanently installed electronic ballasts, power supplies with 0-10V / 1-10V control input, 1-4 channel LED strips and all compatible devices and consumers that can be switched or dimmed using 230V mains voltage.

OPTIONAL OPERATING MODES

Depending on the Quasar module used and the connected one consumers can select the required operating mode quickly and easily. Switching, dimming, different modes for 1-4 channel LED strips and a special sensor mode enable previously unimagined control options and functions.

RANGE AND SECURITY

By using the latest microprocessors and encrypted Multi-Protocol-Mesh-Technology, the Quasar modules offer maximum security and maximum range. Each module also serves as a repeater within the network and increases the range accordingly. Any Quasar module can be used as a repeater to connect controllers that are too far away. Both the Quasar control modules and the Quasar app can be kept up to date by software updates if required. So you always enjoy the full and updated range of functions.

EASY AND QUICK INSTALLATION

Due to the compact design and depending on the application, the modules can often be installed almost »invisibly« directly in the junction box, in the lamp canopy or with the power supply. The modules are already pre-configured for the most common applications, which means that the most important functions can be operated and tested using the switch inputs after installation, even without using the Quasar app. A multi-coloured signal LED inside the module provides information about the operating status and any faults at any time.

CUSTOMIZE SWITCHING SIGNALS

Many switching parameters such as the duty cycle, dimming behaviour, soft start, switch-on and switch-off delays as well as the minimum and maximum brightness can be adapted to the respectively connected lights or consumers.


FLEXIBLE USE AND OPERATION

The modules can be used as individual, autonomously operating controllers or in combination with many others controllers they work in networked operation. No central control unit is required. Every controller can be operated by up to 4 buttons, by app for smartphone / tablet or in combination with app and button respectively. This ensures that you can switch the lighting quickly and easily always on entering or leaving a room.

EASY APP START-UP AND CONTROL

If you want to operate the Quasar modules with a smartphone or tablet [Android / iOS, compatible from BT4.2], download the Quasar app - available free of charge in the App / Play-Store and and install the app. Then everything is lightning fast: create a free user account via the intuitive menu, log in, set up the rooms in which Quasar modules are installed, scan the assembled and operational controllers and configure them according to your wishes. Your smart Quasar network is ready.

product video

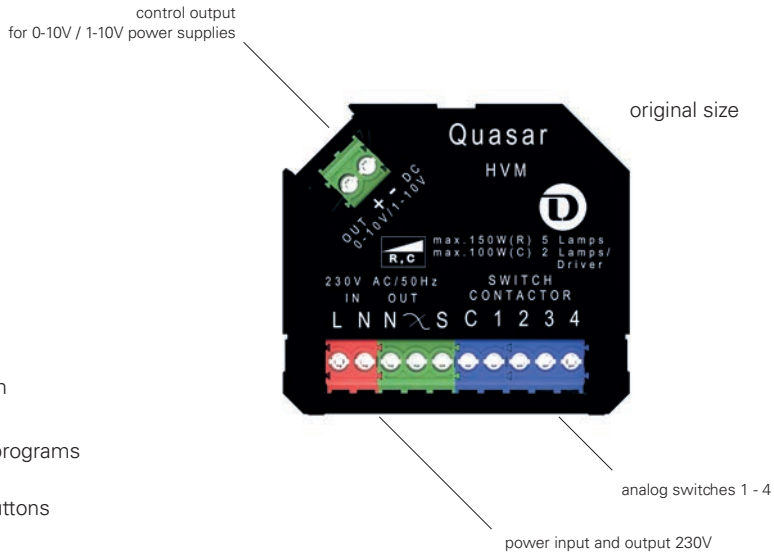

DEKO-LIGHT QUASAR HVM

- plastic housing
- dimensions L x W x H: 46 x 41 x 24 mm
- stand-alone or networked operation
- quick installation through pre-installed programs and dimming functions
- controllable via up to 4 potential-free buttons and / or smartphone app
- adjustable and freely configurable: dimming level, minimum and maximum brightness, programs, speed, time- / day-dependent switching cycles
- data transmission using the latest BT-Mesh technology
- power for suitable R loads [incandescent lamp, high-voltage halogen] 1 - 150W / max. 5 components
- power for suitable C loads [high-voltage LED, electrical power supplies] 1 - 100W / max. 2 components
- control output 0-10V / 1-10V for up to 5 power supplies [switching capacity max. 100W, higher capacity by means of additional relay [not included]
- overload, overheating, network, operation display
- connection via screw terminals

item	colour	price
843007	■ black	**139,95 €**




DEKO-LIGHT QUASAR HVM
230V DIMMING AND SWITCHING WITH A SMARTPHONE AND / OR BUTTON

With this small module, which is directly in a junction box or can be installed in a lamp canopy suitable lights, power supplies or other compatible 230V components can be dimmed or switched directly. Via the 0-10V / 1-10V control output, power supply units with the corresponding control input can still be dimmed and switched.

With the additional sensor function of the module, all commercially available motion detectors, twilight switches etc. that are equipped with a 230V switching output can become a radio actuator. The problem solver wherever there are no corresponding cables.

Commissioning is child's play thanks to many preconfigured scenes. To be able to use them, you only need to connect potential-free buttons [1-4 depending on the function]. Since standard push buttons are used, you can integrate Quasar into any existing electrical installation and thus into the switch ranges of all manufacturers.

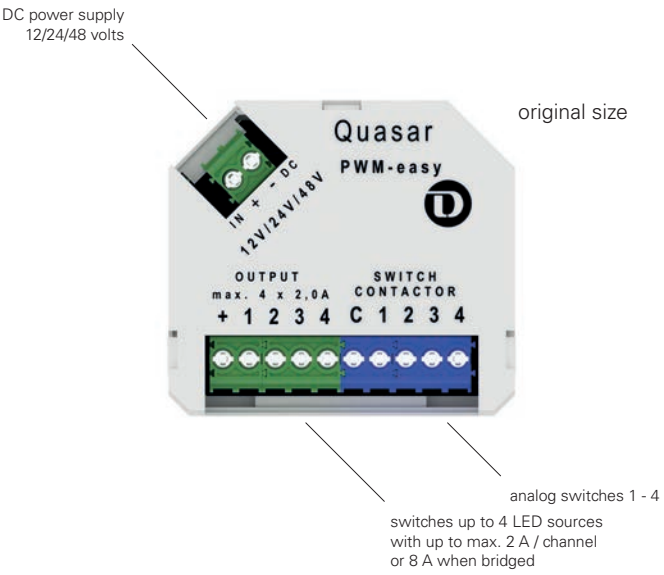

DEKO-LIGHT QUASAR PWM-EASY

- plastic housing
- dimensions L x W x H: 46 x 41 x 24 mm
- stand-alone or networked operation
- quick installation through pre-installed programs and dimming functions
- for the control of 1-4 channel LED stripes / lights [single, WW/CW, RGB, RGBW]
- controllable via up to 4 potential-free buttons and / or smartphone app
- adjustable and freely configurable: colours, brightness, programs, speed
- data transmission using the latest BT-Mesh technology
- max. power je Modul:
  12V DC = 4x 24W [each channel]
  or 1x 90W [bridged mode]
  24V DC = 4x 48W [each channel]
  or 1x 190W [bridged mode]
  48V DC = 4x 96W [each channel]
  or 1x 380W [bridged mode]
- load quantity per module: max. 5 components of the same type
- overload, overheating, network, operation display
- connection via screw terminals [4x V-, V+]

item	colour	price
843053	☐ white	**149,95 €**



DEKO-LIGHT QUASAR PWM-EASY
1-4 CHANNEL STRIPES AND LED CONTROLS WITH SMARTPHONE AND / OR BUTTON

This small module can be installed directly on the corresponding power supply or in a nearby junction box and controls all common 1-4 channel LED stripes and lights [single, WW / CW, RGB, RGBW] which are operated with a voltage of 12V, 24V or 48V DC and controlled by PWM control.

As with the HVM module, commissioning is child's play thanks to the many pre-configured scenes. To be able to use them, you only need to connect potential-free buttons 1-4 depending on the function]. Since standard push buttons are used, you can integrate Quasar into any existing electrical installation and thus into the switch ranges of all manufacturers.


With this module, too, you have the option to control all basic functions as well as countless additional functions with the Quasar app for compatible Android and Apple smartphones [BT from 4.2]. The configuration and operation is simple and intuitive.

DEKO-LIGHT QUASAR RF-SMART-BOX
NOT ONLY TAKES EXISTING INSTALLATIONS TO THE NEXT LEVEL

The small blue RF Smart Box is a real all-rounder, because on the one hand it makes it possible to operate an existing LED stripe installation, which was previously controlled with the popular DEKO-LIGHT RF system via remote control, can now be operated with a smartphone and thus benefit from the possibilities and advantages of a modern control system.

The conversion is very simple: connect the RF Smart Box to the existing LV power supply, plug in the RF controller and you're done! Afterwards, the app, which is available free of charge, can be put into operation and adapted accordingly.

Furthermore, there are no more performance limits to your planning with Quasar. Using the RF-Link control signal, you can control one or more RF controllers connected via RJ45 cable simultaneously. In this way, you can also realise high performance requirements of more complex or extensive installations.

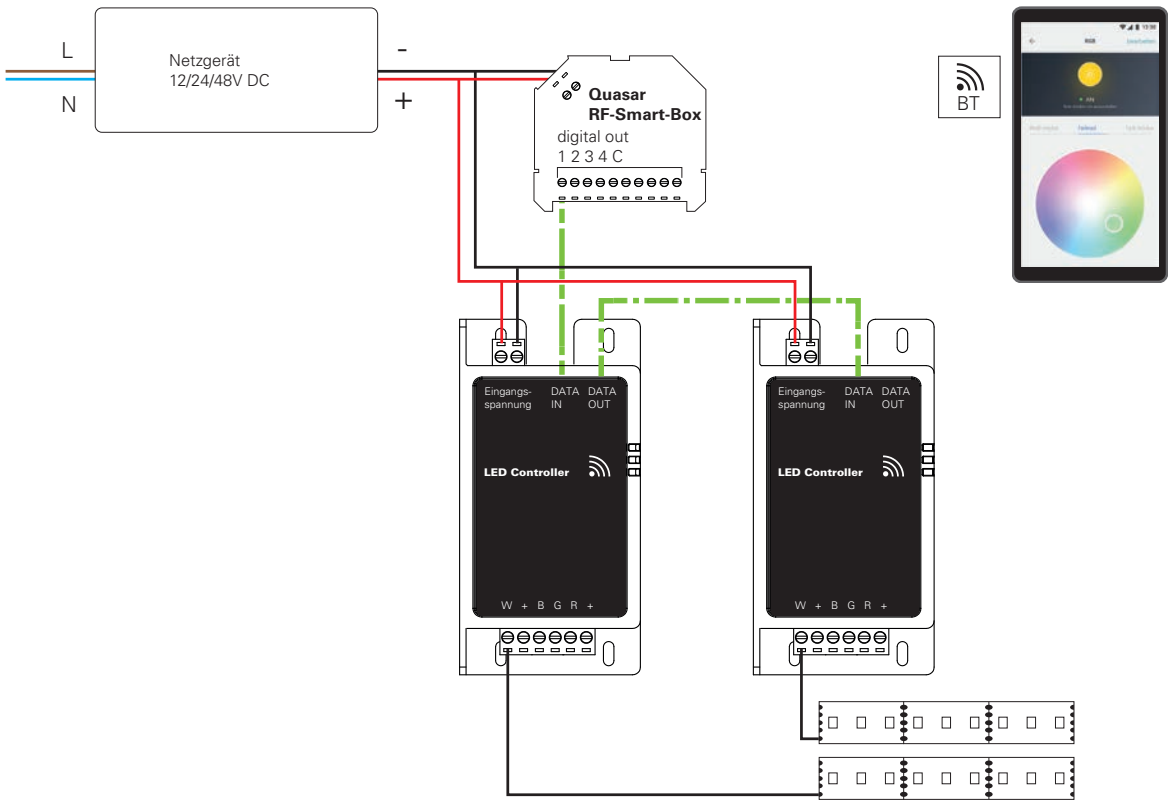

DC power supply
12 / 24 / 48 Volt

original size



RF link [digital output signal]
for control of 1-4 channel
RF controllers

DEKO-LIGHT QUASAR RF-SMART-BOX


- plastic housing
- dimensions L x W x H: 46 x 41 x 24 mm
- stand-alone or networked operation
- quick installation through pre-installed programs and dimming functions
- digital output signal [RF-Link] for controlling DEKO-LIGHT RF controllers [single, WW/CW, RGB, RGBW]
- adjustable and freely configurable: colours, brightness, programs, speed
- data transmission using the latest BT-Mesh technology
- connection via screw terminals
- CAT5 adapter incl. cable for connection to RF controller included in delivery


item	colour	price
843061	blue	**169,95 €**

12/24/48 Volt | CAT 5 | RF-Link | BT | + – | IP20 | 1/2/3/4 CH

module incl. adapter and CAT5 cable
for connection to RF controller



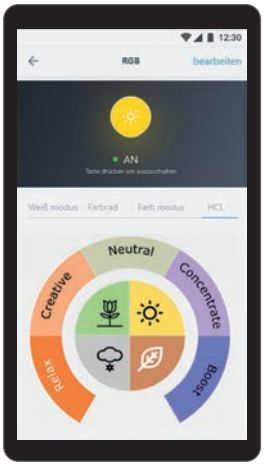

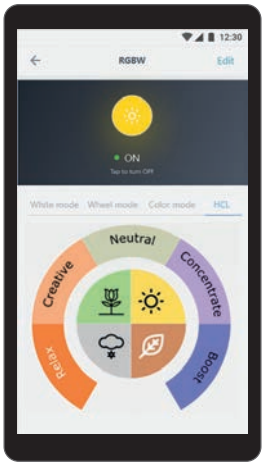

DEKO-LIGHT QUASAR GATEWAY
THE WORLDWIDE CONTROL CENTRE FOR YOUR LIGHTING CONTROL SYSTEM

The completely new Quasar Gateway is a real jack-of-all-trades. By using the gateway, it takes over the control of your existing Quasar modules and additionally connects them to the internet and mobile network. This opens up completely new possibilities for use and application for your intelligent Quasar lighting control system.

Installation and commissioning is extremely simple and in a very short time: plug in, log on, enter the WLAN password and you're done!

Take advantage of the diverse and convenient possibilities of the networked Quasar light control and make your life smarter!

Features of the gateway:

- worldwide access via smartphone app to all control functions of your Quasar network
- repeater feature also within the home network
- calendar functions
- time-dependent lighting control [e.g. for HCL]
- use of Quasar modules as transmitters e.g. for sensors [motion detectors, magnetic contacts, water level sensors, temperature sensors...]
- lighting control of controllers from other suppliers [e.g. ZigBee]
- voice control [dim, colours, etc.] by standard available voice assistants
- automatic updating of all Quasar components
- central control unit of the Quasar network




DEKO-LIGHT QUASAR GATEWAY

- plastic housing
- dimensions L x W x H: 115 x 125 x 24 mm
- wall mounting possible
- radio frequency: 2,5 GHz
- data transmission through the latest BT mesh technology
- power consumption max. 20 mA
- power supply via micro USB connection cable [not included in the scope of delivery]
- umlaufende LED, die den Betriebszustand signalisiert
- simplest commissioning
- no additional monthly costs

item	colour	price
843069	☐ white	**189,95 €**

accessories

930460	230V USB plug-in power supply incl. micro-USB connection cable	**19,95 €**

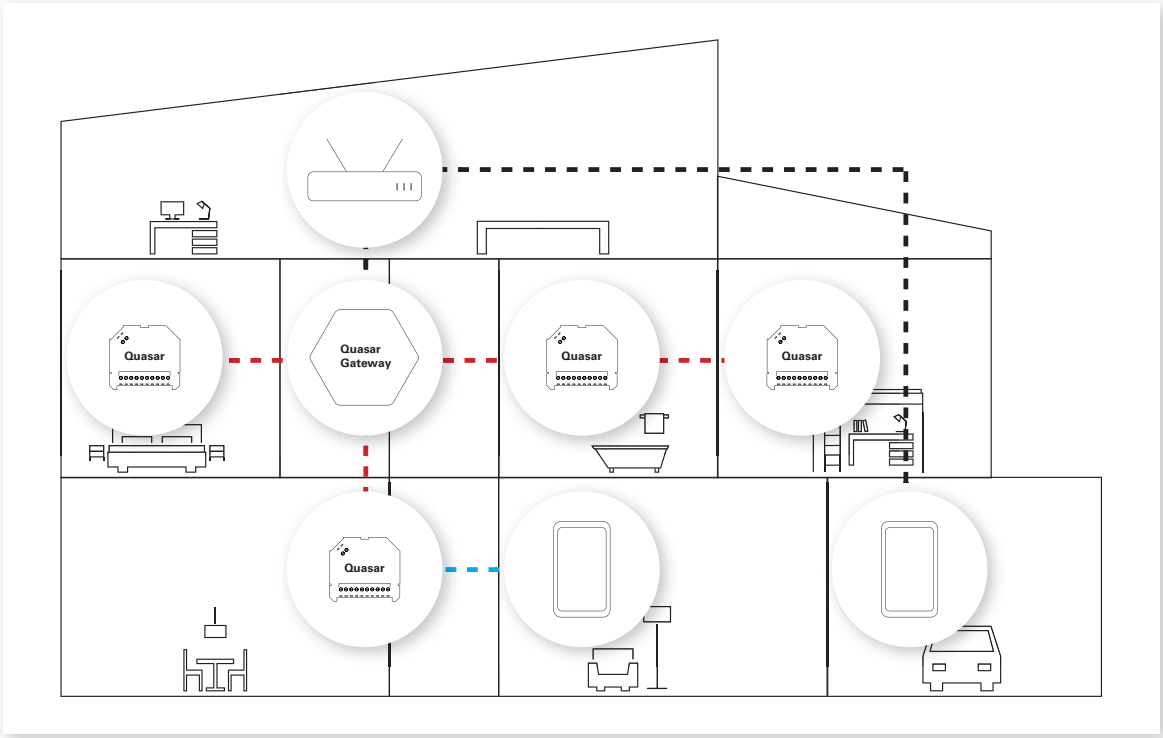

The router establishes the connection between the Internet and the home network / WLAN.

The smartphone can establish a direct connection if it is within range of a Quasar module. With the help of the gateway and a WLAN connection, modules that are out of range [e.g. in other floors or basements] can also be controlled. Quasar modules can thus be controlled worldwide via the smartphone's internet connection.

Quasar Gateway, the control centre

Quasar control module, e.g. HVM, WM-easy or RF-smart-Box

connection between smartphone and router

connection between smartphone and Quasar network

connection within the Quasar network

SMART HOME CAN BE SO SIMPLE

Install the Casambi module in the distribution box, suspended ceiling or similar – install the app from the Playstore/iTunes, connect the module to your mobile phone and the app, set it up and off you go!

CASAMBI BLUETOOTH CBU-TED | 230V SWITCHING/DIMMING

With this module 230V components can be directly dimmed or switched [configuration via mobile app].



- suitable for R-loads [light bulb, high-voltage halogen]
- suitable for C-loads [dimmable high-voltage LED, electrical power supplies]
- power in switching operation: light bulb, high-voltage halogen, high-voltage LED, electrical ballasts: max. 150W
- power in dimming mode: dimmable high-voltage LED, electrical ballasts: max. 50W / max. 2 components
- dimensions L x W x H: 40,4 x 36,3 x 14 mm

item	colour	price
843008	☐ white	**144,95 €**

220-240 Volt | IP20 | BT

CASAMBI BLUETOOTH CBU-ASD | DALI/0-10V | 1-10V

The module generates either a DALI, 0-10V or 1-10V control signal with which 1 ballast/power supply or similar can be operated [configuration via mobile app].



- dimensions L x W x H: 56,5 x 35,8 x 22,3 mm

item	colour	price
843011	☐ white	**149,95 €**

220-240 Volt | IP20 | BT

CASAMBI BLUETOOTH CBU-PWM4 | LED 1-4 CHANNEL DIMMER

With this module you can control 12V/24V LED stripes, lamps etc. with 1-4 channels [WW, CW, WW-CW, RGB, RGBW], which can be controlled by PWM [configuration via mobile app].

- dimensions L x W x H: 72,6 x 30 x 18 mm
- power 144W at 24V, 72W at 12V



item	colour	price
843037	white	**179,95 €**

12-24 Volt | CV | IP20 | BT





CASAMBI BLUETOOTH WAND-CONTROLLER XPRESS

- Bluetooth-wall controller compatible with Casambi-System
- mounting with screws or adhesive pad
- independent mounting, as battery operated [3V button cell] and no cabling necessary
- setup and programming via Casambi-App
- plastic
- L x W x H: 90 x 90 x 12 mm

item	colour	price
843050	white	**399,95 €**
843049	black	**399,95 €**

3 Volt

RF CONTROLLER

The respective receiving systems are controlled within a range of 20 m through remote control. The system can be expanded in a simple manner by connecting one single remote control to several controller boxes. Note: A 100% synchronous controlling [program sequence, colour change] of several control boxes with one single remote control can be implemented only with an available network cable connection [Master-Slave function]. The memory effect saves the most recent setting after a power failure.



DEKO-LIGHT CONTROLLER SET RF SINGLE

- for controlling 1-channel LED stripes
- set consists of: controller, remote control and wall bracket
- dimmable
- 4 effect programs
- adjustable programme speed
- max. 8 remote controls / 2 touch panels per system range
- memory function
- master/slave function
- dimensions controller L x W x H: 115 x 57 x 25 mm
- max. 7,5A each channel
- power: 2x 90W [180W] at 12V DC, 2x 180W [360W] at 24V DC, 2x 360W [720W] at 48V DC

item	colour	price
843056	black	**104,95 €**

12-48 Volt | CV | 2,4 GHz | 1 CH | RF

accessories for 843056

843064	controller	**89,95 €**
843014	remote control	**32,95 €**
843013	wall bracket	**10,95 €**
843018	touch panel	**96,95 €**



DEKO-LIGHT CONTROLLER SET RF WHITE


- for controlling WW/CW LED stripes
- set consists of: controller, remote control and wall bracket
- WW oder CW dimmable as single colour
- 9 effect programs
- adjustable programme speed
- max. 8 remote controls / 2 touch panels per system range
- memory function
- master/slave function
- dimensions controller L x W x H: 115 x 57 x 25 mm
- max. 7,5A each channel
- power: 2x 90W [180W] at 12V DC, 2x 180W [360W] at 24V DC, 2x 360W [720W] at 48V DC

item	colour	price
843057	black	**109,95 €**

12-48 Volt | CV | 2,4 GHz | 2 CH | RF

accessories for 843057

843065	controller	**89,95 €**
843015	remote control	**32,95 €**
843013	wall bracket	**10,95 €**
843019	touch panel	**96,95 €**

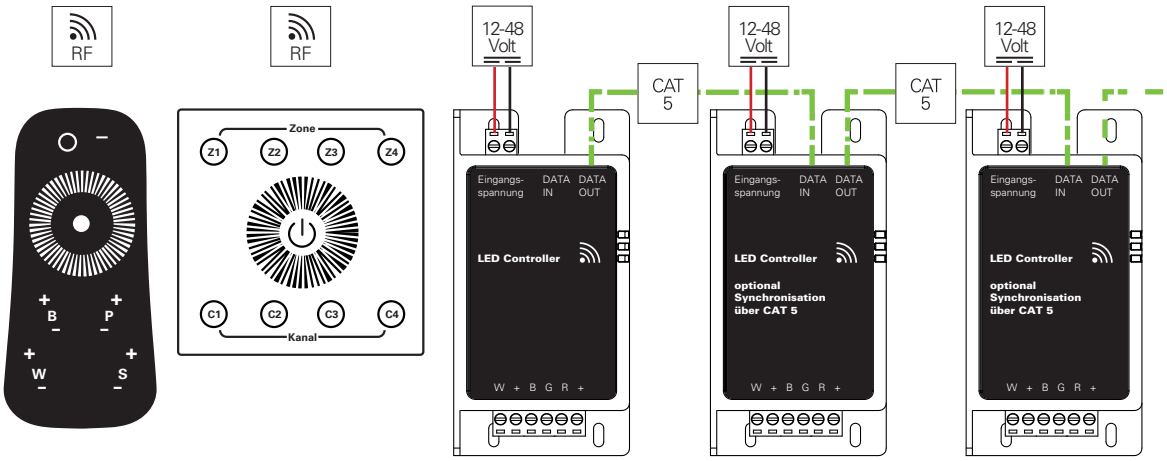

outputs for LED stripes/luminaires



DEKO-LIGHT CONTROLLER SET RF COLOR

- for controlling RGB LED stripes
- set consists of:
  controller, remote control and wall bracket
- R/G/B dimmable as single colour
- 13 effect programs
- adjustable programme speed
- max. 8 remote controls / 2 touch panels per system range
- memory function
- master/slave function
- dimensions controller L x W x H: 115 x 57 x 25 mm
- max. 5,0A each channel
- power: 3x 60W [180W] at 12V DC,
  3x 120W [360W] at 24V DC,
  3x 240W [720W] at 48V DC

item	colour	price
843058	black	**114,95 €**

12-48 Volt | CV | 2,4 GHz | 3 CH | RF

accessories for 843058

843066	controller	**96,95 €**
843016	remote control	**32,95 €**
843013	wall bracket	**10,95 €**
843020	touch panel	**96,95 €**



DEKO-LIGHT CONTROLLER SET RF COLOR & WHITE

- for controlling RGB + white LED stripes
- set consists of:
  controller, remote control and wall bracket
- R/G/B + white dimmable as single colour
- 12 effect programs
- adjustable programme speed
- max. 8 remote controls / 2 touch panels per system range
- memory function
- master/slave function
- dimensions controller L x W x H: 115 x 57 x 25 mm
- max. 5,0A each channel
- power: 4x 45W [180W] at 12V DC,
  4x 90W [360W] at 24V DC,
  4x 180W [720W] at 48V DC

item	colour	price
843059	black	**119,95 €**

12-48 Volt | CV | 2,4 GHz | 4 CH | RF

accessories for 843059

843067	controller	**96,95 €**
843017	remote control	**32,95 €**
843013	wall bracket	**10,95 €**
843021	touch panel	**96,95 €**

DEKO-LIGHT TOUCH PANEL RF WITH 4-SONE-FUNCTION | 4 AREAS SEPARATELY CONTROLLED

The respective receiving systems are controlled within a range of 20 m through the touch panel. The system can be expanded in a simple manner by connecting one single touch panel to several controller boxes. Note: A 100% synchronous controlling [program sequence, colour change] of several control boxes with one single remote control per zone can be implemented only with an available network cable connection [Master-Slave function]. The memory effect saves the most recent setting after a power failure. The unit is mounted in a 68mm single device box.





DEKO-LIGHT WALL TOUCH PANEL RF SINGLE

- control of the controller via radio, no additional control lines necessary
- for controlling 1-channel LED stripes / luminaires
- 4 zones
- independent dimming of individual zones
- all zones can be switched on/off together
- 4 effect programs
- adjustable programme speed
- memory function
- dimensions L x W x H: 86,5 x 86,5 x 31,1 mm

item	colour	price
843018	white	**96,95 €**

220-240 Volt | 2,4 GHz | 1 CH | 68 | RF

accessories for 843018

843064	controller	**89,95 €**

DEKO-LIGHT WALL TOUCH PANEL RF WHITE


- control of the controller via radio, no additional control lines necessary
- for controlling WW/CW LED stripes / luminaires
- 4 zones
- independent dimming of individual zones
- all zones can be switched on/off together
- 9 effect programs
- adjustable programme speed
- memory function
- dimensions L x W x H: 86,5 x 86,5 x 31,1 mm

item	colour	price
843019	white	**96,95 €**

220-240 Volt | 2,4 GHz | 2 CH | 68 | RF

accessories for 843019

843065	controller	**89,95 €**

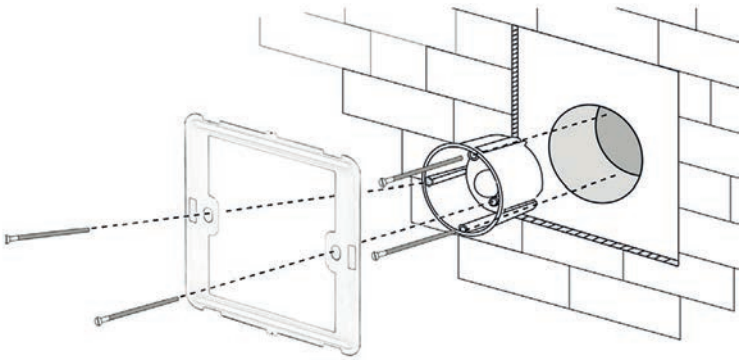





DEKO-LIGHT WALL TOUCH PANEL RF COLOR

- control of the controller via radio, no additional control lines necessary
- for controlling RGB LED stripes / luminaires
- 4 zones
- independent dimming of individual zones
- all zones can be switched on/off together
- 13 effect programs
- adjustable programme speed
- memory function
- dimensions L x W x H: 86,5 x 86,5 x 31,1 mm

item	colour	price
843020	☐ white	**96,95 €**

220-240 Volt | 2,4 GHz | 3 CH | 68 | RF

accessories for 843020

843066	controller	**96,95 €**

DEKO-LIGHT WALL TOUCH PANEL RF COLOR & WHITE

- control of the controller via radio, no additional control lines necessary
- for controlling RGB + white LED stripes / luminaires
- 4 zones
- independent dimming of individual zones
- all zones can be switched on/off together
- 12 effect programs
- adjustable programme speed
- memory function
- dimensions L x W x H: 86,5 x 86,5 x 31,1 mm

item	colour	price
843021	☐ white	**96,95 €**

220-240 Volt | 2,4 GHz | 4 CH | 68 | RF

accessories for 843021

843067	controller	**96,95 €**

DMX controller		max. number of zones	DMX channels per zone	1-channel-modus [single]	2-channel-modus [CW-WW]	3-channel-modus [RGB]	4-channel-modus [RGBW]	5-channel-modus [RGBW-A]	6-channel-modus [RGB-CW-WW-A]
843005 TC-2 	wall controller for dimming of 1-DMXchannel with 4 programmable keys	1	1	yes	-	-	-	-	-
843000 Art-4 RGB/RGBW 	controller can next to 4-channel RGBW also for 3-channel RGB components used become	1	3/4	-	-	yes	yes	-	-
843003 Art-9 RGB/RGBW 	controller can next to 4-channel RGBW also for 3-channel RGB components used become	1	3/4	-	-	yes	yes	-	-
843004 Touch 16CH Pro 	the 4 zones of the controller can be any be mixed [1- / 2- / 3- / 4-channel]	4	1-4	yes [zone-mix availa-ble]	yes [zonemix available]	yes [zonemix available]	yes [zonemix available]	-	-
861203 X-Fade-6 II 	simple wall controller for the simple and manual Dimming from up to 6 DMX channels	-	1-6	yes	manual regulati-on [max. 3x 2 CH]	manual regulati-on [max. 2x 3 CH]	manual regulati-on [max. 1x 4 CH]	-	-
843001 Touch 16C 	wall controller for controlling up to 16 DMX channels	4	1-4	yes [max. 16x 1 CH]	manual colour-setting [max. 8x 2 CH]	manual colour-setting [max. 4x 3 CH]	manual colour-setting [max. 4x 4 CH]	-	-
843046 LED EASY Operator 	comfotable controller with programmable keys, programs ideal for gastronomy, events and more comprehensive installations	4	1-6	yes [max. 4x 1 CH]	yes [max. 4x 2 CH]	yes [max. 4x 3 CH]	yes [max. 4x 4 CH]	yes [max. 4x 5 CH]	yes [max. 4x 6 CH]
843047 LED Color Chief 	top controller with programmable keys, programs and USB backup ideal for gastronomy, events and more comprehensive installations	8	1-6	yes [max. 8x 1 CH]	yes [max. 8x 2 CH]	yes [max. 8x 3 CH]	yes [max. 8x 4 CH]	yes [max. 8x 5 CH]	yes [max. 8x 6 CH]

DMX dimmer		available channel mode	compatible with 1-channel-controllers	compatible with 2-channel-controllers	compatible with 3-channel-controllers	compatible with 4-channel-controllers	compatible with 5-channel-controllers	compatible with 6-channel-controllers	flicker free
843336 LED Dimmer 2 	simple DMX dimmer with high PWM rate [deployment in areas, in those filmed will]	1/2	yes	yes	-	-	-	-	yes
843268 OLED Dimmer 3 	just about display, internal car programs or manual control system even without a controller, simple DMX installation through CAT5 cable	1/3	yes	-	yes	-	yes [required two times]	yes [required two times]	-
843335 LED Dimmer 3 	simple DMX dimmer with high PWM rate [deployment in areas, in those filmed will]	3	-	-	yes	-	yes [required two times]	yes [required two times]	yes
843269 OLED Dimmer 4 	just about display, internal car programs or manual control system even without a controller, simple DMX installation through CAT5 cable	1/2/4	yes	yes	-	yes	-	-	-
843337 LED Dimmer 4 	simple DMX dimmer with high PWM rate [deployment in areas, in which will be filmed]	4	-	-	yes	yes	-	-	yes
843273 Dimmer R-DMX 3+1 	DMX dimmer with remote configuration possibility [R-DMX] especially for the events sector	3/4	-	-	yes	yes	-	-	-
843060 LED-Dimmer DMX, R-DMX 	DMX dimmer 12-48V, addressing via DIP switches	1/3/4	yes	yes	yes	yes	yes [required two times]	yes [required two times]	yes
843054 LED-Dimmer DMX für [CC] stromstabile luminaires 	DMX dimmer 24-50V, 4x60W, programming via display	1/2/3/4	yes	yes	yes	yes	yes [required two times]	yes [required two times]	yes



DEKO-LIGHT CONTROLLER TC-2

The TC-2 controller is a touch panel, allowing the storage and retrieval of up to 4 storage locations. Scenes and atmospheres are created quickly in a user-friendly manner with the aid of the intuitive controller. It suits both hotels and auditoriums, as well as the home and living space.

- touch interface
- optional DMX512 or analogous 0-10V
- fade time setting from 0.01 to 10s
- dimming steps 0-100%
- LED Display
- 4 storage locations
- DMX out / DC in / 0-10V out: connection terminals
- dimensions L x W x H: 86 x 86 x 15,3 mm

item	colour	price
843005	black	**199,95 €**

12-24 Volt | 68 | DMX | 0-10 Volt | 1 Zone | 1 CH

accessories

872128 power supply Mini 24V/4W **13,95 €**



DEKO-LIGHT X-FADE-6

The X-Fade 6 is a modern wall controller on the DMX basis for LED dimmers. Up to 6 faders can be directly controlled and connected to RGB dimmers. For example, 2 RGB stripes are addressed and also 6 single one-colour stripes can be controlled in 6 different zones. The X-Fade 6 is further used as a standard 6 channel DMX Controller, which enables the control of DMX dimmers or devices with up to 6 channels. Additionally, up to 6 different programs can be retrieved. Each program can contain up to 100 steps. Programs can also be controlled automatically. [A mounting box is required for the assembly of the controller.]


- incl. IR-remote control
- 6 programmable scenes
- fade time setting
- DMX out / DC in: connection terminals
- dimensions L x W x H: 86 x 86 x 16,3 mm

item	colour	price
861203	black	**199,95 €**

12-24 Volt | 68 | DMX | 1 Zone | 1-6 CH

accessories

872128 power supply Mini 24V/4W **13,95 €**

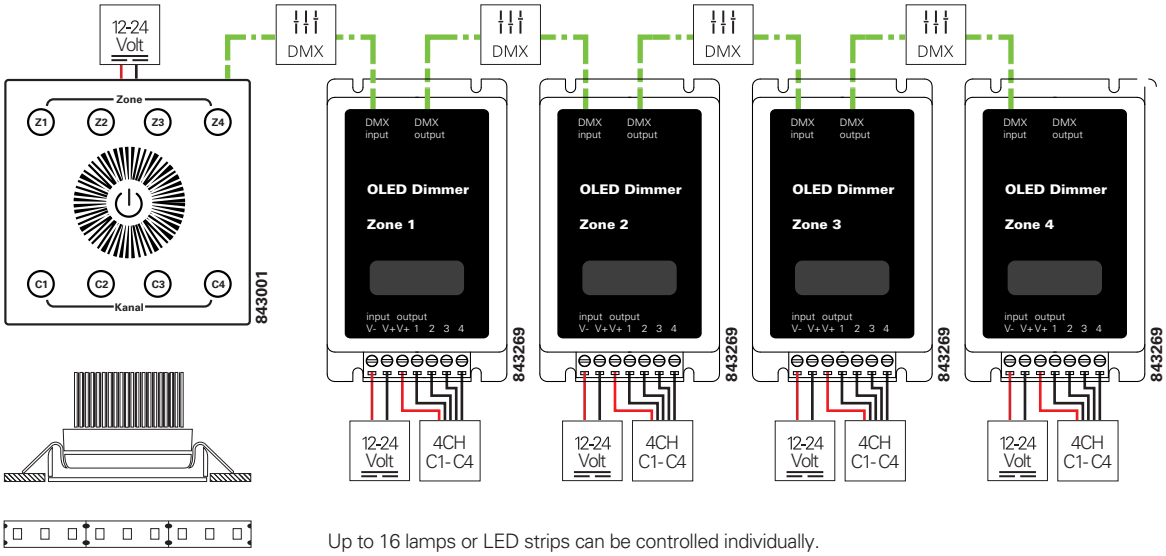

Up to 16 lamps or LED strips can be controlled individually.

DEKO-LIGHT LED DMX TOUCH 16C



The LED DMX TOUCH 16C is provided with 4 zones with 4 channels each. In total, 16 single channels are available. At the selection of one of the zones (Z1-Z4), the touchwheel controls all 4 channels of this zone. At the selection of one channel (C1-C4) in one zone, the touchwheel controls this selected channel. If neither a zone nor a channel is selected, the touchwheel controls all zones, including their channels. Please note that the controller was specifically designed for warm and/or cold white end devices. By its functions, it is only conditionally implemented for RGB or RGBW end devices.

- background illumination and touch signal tone optionally connectable
- memory function: the DMX Touch 16C memorizes the most recent brightness setting of all zones and channels
- DMX out: CAT5 [RJ45] opt. connection terminals
- dimensions L x W x H: 86 x 86 x 17,4 mm

item	colour	price
843001	black	**129,95 €**

12-24 Volt | 68 | DMX | CAT 5 | 4 zones | 4 x 1 CH

accessories

872128	power supply Mini 24V/4W	**13,95 €**





DEKO-LIGHT ART 4 | RGB/RGBW

The ART 4 controller is a touch panel for playing and editing colour programs, specifically for RGBW end devices. Up to 4 atmospheres and up to 4 scenes can be saved and retrieved. Thee ART-4 contains 4 function menus: Selection of integrated programs, colour, brightness, speed setting. Scenes and atmospheres are created in a quick and userfriendly manner. As a design element, the ART 4 controller is ideally suited in the environment and is an appropriate choice both for hotels and auditoriums and the home and living space.

- PWM out for the direct control of LED stripes
- control element and controller via touchwheel
- fade times of 0-4 seconds possible
- DMX out / DC in: connection terminals
- dimensions L x W x H: 86 x 86 x 15,3 mm
- integrated PWM dimmer 12/24V, 4 x 2A

item	colour	price
843000	black	**229,95 €**

12-24 Volt | 68 | DMX | 1 Zone | 3/4 CH

accessories

872128	power supply Mini 24V/4W	**13,95 €**

DEKO-LIGHT ART 9 | RGB/RGBW

The ART 9 controller is a touch panel for playing and editing colour programs, specifically for RGBW end devices. Up to 9 atmospheres and up to 9 scenes can be saved and retrieved. The ART-4 contains 4 function menus: Selection of integrated programs, colour, brightness, speed setting. Scenes and atmospheres are created in a quick and user-friendly manner. As a design element, the ART 9 controller is ideally suited in the environment and is an appropriate choice both for hotels and auditoriums and the home and living space.

- PWM out for the direct control of LED stripes
- control element and controller via touchwheel
- fade time setting for switch on/off and colour change
- function memory and power failure protection
- DMX out / DC in: connection terminals
- dimensions L x W x H: 172 x 86 x 15,3 mm
- integrated PWM dimmer 12/24V, 4 x 2A

item	colour	price
843003	black	**234,95 €**

12-24 Volt | 68 | DMX | 1 Zone | 3/4 CH

accessories

872128	power supply Mini 24V/4W	**13,95 €**



DEKO-LIGHT TOUCH 16CH PRO

The Touch 16CH Pro controller is a touch panel, allowing the storage and retrieval of up to 4 zones with 4 channels each. Scenes and atmospheres are created quickly in a userfriendly manner with the aid of the intuitive controller. It suits both hotels and auditoriums, as well as the home and living space. As a design element, the Touch 16Ch Pro is ideally implemnted in the living space.

- colour mode for setting the colours in each individual zone
- program mode for the colour change and fader setting for each zone
- time mode for setting the start and end time of the programs
- 14 pre-installed or 8 auto-created programs can be assigned to one scene
- internal clock to switch the zones time-dependently with the saved programs
- DMX out / DC in: connection terminals
- dimensions L x W x H: 86 x 86 x 15,3 mm

item	colour	price
843004	black	**359,95 €**

12-24 Volt	68	DMX	4 zones	1-4 CH

accessories

872128	power supply Mini 24V/4W	**13,95 €**



EUROLITE DMX-CONTROLLER LED COLOR CHIEF

The COLOR CHIEF is an innovative and easy to use DMX controller, which is optimally tailored to the needs and requirements of gastronomy, bars, event locations, event rooms, etc. . It is suitable for controlling e. g. LED stripes, lights, spotlights, light effects and all other components with 1-6 colours [WW, CW, WW-CW, RGB, RGBW, RGB-WAUV] or up to 30 channels, which can be controlled with DMX via corresponding controller/dimmer. 24 different and directly selectable scene buttons allow access to previously stored lighting scenes or program sequences. The USB interface can be used to save the created programming to a USB memory stick and, if necessary, to restore it.


- easy control of LED stripes, lights, headlights or similar with 1-6 colors or simple lighting effects with up to 30 channels
- for up to 8 different device groups/zones
- fast and easy programming
- extensive, already pre-installed device library with many common applications
- additional devices can be easily added manually
- 8 colour effects directly selectable
- three additional channels are freely assignable per device [e.g. for special functions, movements, etc.]
- colour wheel selection
- 24 memory slots for permanently stored lighting moods
- USB port for data storage / restoration of programming
- clock control with programmed chases via music signal
- total dimming, fade time between individual scenes comfortably adjustable
- 3-pin XLR connector
- firmware-Update via USB
- operation as rack installation [19 "/ 3 height units] or desktop unit
- control: DMX / max. 240 channels
- power supply: power cable with power adapter [included]
- weight: 2,2 kg
- protection class: IP20
- connection power: 10 W
- dimensions L x W x H: 483 x 132 x 85 mm

item	colour	price
843047	black	**419,95 €**

220-240 Volt | DMX | 8 zones | 1-6 CH

accessories

882271	adapter DMX plug to CAT5	**54,95 €**

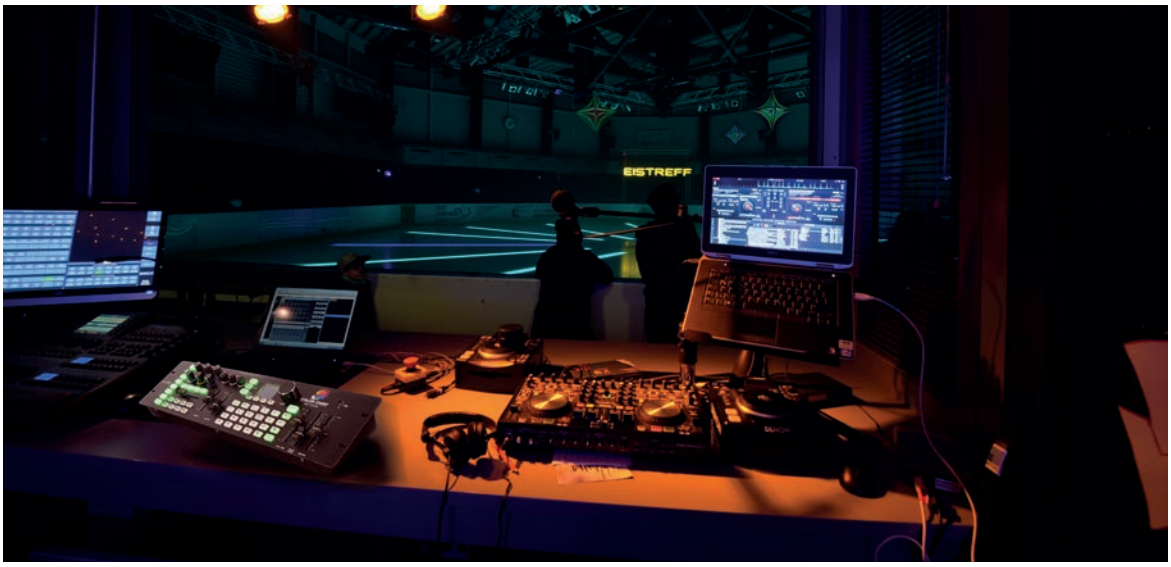



EUROLITE DMX-CONTROLLER LED EASY DELUXE

The LED EASY DELUXE is a very simple and intuitive DMX controller that can be used for a wide range of applications. No matter if commercial or private, wherever LED stripes, lights, spotlights with 1-6 colours [WW, CW, WW-CW, RGB, RGBW, RGBW-A-UV] and DMX are controlled via corresponding controller/dimmer, this new DXM controller finds its application. It is very easy to directly select 12 different stored light moods/scenes using a rotary control.

- easy control of LED stripes, lamps, spotlights etc. with 1-6 colours
- for up to 4 different device groups/zones
- quick and easy commissioning thanks to pre-installed programs
- single DMX channels for red, green, blue, white, amber and UV
- 12 memory slots for permanently stored lighting moods
- 4 colour controls with 12 colours each
- 4 brightness controls
- function buttons for blackout, auto, music control and strobe effect
- fader for overall brightness, sequence and fade time
- 3-pin XLR connector
- operation as a tabletop device or built-in device
- control: DMX / max. 24 channels
- power supply: power cable with power adapter [included]
- weight: 1,2 kg
- protection class: IP20
- connection power: 10 W
- dimensions L x W x H: 260 x 140 x 65 mm

item	colour	price
843046	black	**199,95 €**

100-240 Volt | DMX | 4 zones | 1-6 CH

accessories

882271	adapter DMX plug to CAT5	**54,95 €**

DEKO-LIGHT OLED DMX DIMMER 3

3 channel all-in-one PWM dimmer with 3 different operating modes:

- **DMX control**
- **standalone Programme mode**
- **standalone dimmer mode**
- to be used as a 1 or 3 channel dimmer
- a manual mode allows the single dimming of the 3 channels on the device [colour setting]
- incl. 27 colour change programs
- master/slave function
- all settings are retrieved via a simple menu on a LCD display
- DMX signal pluggable via CAT5 [2m patch cable included in delivery]
- dimensions L x W x H: 116 x 57 x 23,8 mm
- max. 6A each channel
- power: 3x 72W [216W] at 12V, 3x 144W [432W] at 24V



item	colour	price
843268	black	**109,95 €**

12-24 Volt | CV | DMX | CAT 5 | 1/3 CH

DEKO-LIGHT OLED DMX DIMMER 4

4 channel all-in-one PWM dimmer with 3 different operating modes:

- **DMX control**
- **standalone Programme mode**
- **standalone dimmer mode**
- to be used as a 1, 2 or 4 channel dimmer
- a manual mode allows the single dimming of the 4 channels on the device [colour setting]
- incl. 13 colour change programs
- master/slave function
- all settings are retrieved via a simple menu on a LCD display
- DMX signal pluggable via CAT5 [2m patch cable included in delivery]
- dimensions L x W x H: 116 x 57 x 23,8 mm
- max. 6A each channel
- power: 4x 60W [240W] at 12V, 4x 120W [480W] at 24V




item	colour	price
843269	black	**124,95 €**

12-24 Volt | CV | DMX | CAT 5 | 1/2/4 CH

DEKO-LIGHT LED DMX DIMMER 2

- simple and powerful 1-2 channel dimmer
- to be used as a single device or in connection with a control panel in an assembly
- flicker free
- connection: screw terminals
- control: DMX, 0-10V, manual, automatic
- dimensions L x W x H: 115 x 57 x 25 mm
- max. 6A each channel
- power: 2x 72W [144W] at 12V,
  2x 144W [288W] at 24V

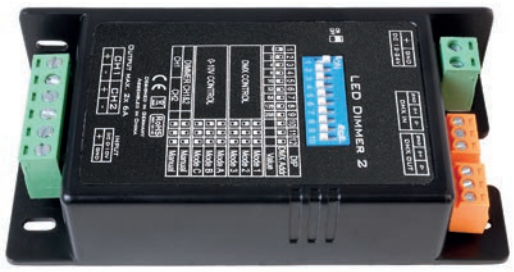

item	colour	price
843336	black	**79,95 €**




DEKO-LIGHT LED DMX DIMMER 3

- simple and powerful 3 channel dimmer
- to be used as a single device or in connection with a control panel in an assembly
- flicker free
- connection: screw terminals
- control: DMX, manual, automatic
- dimensions L x W x H: 115 x 57 x 25 mm
- max. 4A each channel
- power: 3x 48W [144W] at 12V,
  3x 96W [288W] at 24V



item	colour	price
843335	black	**82,95 €**




DEKO-LIGHT LED DMX DIMMER 4

- simple and powerful 4 channel dimmer
- to be used as a single device or in connection with a 4 channels DMX wall controller
- flicker free
- connection: screw terminals
- control: DMX, manual, automatic
- dimensions L x W x H: 115 x 57 x 25 mm
- max. 3A each channel
- power: 4x 36W [144W] at 12V,
  4x 72W [288W] at 24V



item	colour	price
843337	black	**86,95 €**



DEKO-LIGHT R-DMX 3+1

RDM means »Remote Device Management«. This remote device management enables the control of the RDMX 3+1 from the control panel. This provides a great advantage, specifically for inaccessible installations or sites that are difficult to reach. If RDM is not available, the DMX address assignment can also be set manually via the DIP switch.



- complies with the DMX 512/1990, RDM protocol/2009
- supports automatic DMX addressing
- incl. top-hat rail adapter
- incl. 2m CAT5 cable [RJ45]
- flicker free
- connection: screw terminals
- dimensions L x W x H: 120 x 43 x 23 mm
- max. 4A each channel
- power: 4x 48W [192W] at 12V,
  4x 96W [384W] at 24V

item	colour	price
843273	black	**89,95 €**

12-24 Volt | CV | DMX | CAT 5 | 3/4 CH

DEKO-LIGHT 4 CHANNEL LED DMX DIMMER 12-48V

- simple and powerful 4 channel dimmer
- RDM capable with compatible controllers [remote configuration, e.g. DMX address]
- use in conjunction with DMX wall controller or DMX512 PC software
- flicker free
- connection DMX in/out: CAT5 or screw terminals
- connection DC in/out: screw terminals
- dimensions L x W x H: 140 x 50 x 26 mm
- max. 4A each channel
- power: 4x 48W [192W] at 12V,
  4x 96W [384W] at 24V,
  4x 192W [768W] at 48V



item	colour	price
843060	black	**96,95 €**

12-48 Volt | CV | DMX | 4 CH

POWER SUPPLY WITH INTEGRATED 3-CHANNEL DMX DIMMER

- compact DMX combi device for simple and quick installation
- powerful 3 channel dimmer and power supply combined in one housing
- controlled with all 3 channels DMX control panels
- supports DMX512
- dimmable from 0 - 100%
- soft dimming without flickering
- dimensions L x W x H: 196 x 75 x 40 mm
- power: 3x 45W



item	colour		power	price
843274	black	12V	135 W	**194,95 €**
843275	black	24V	135 W	**194,95 €**




DEKO-LIGHT LED DMX/R-DMX DIMMER 4 CC

- controls 4 independent constant current [CC] LED-luminaires via all common DMX and RDM DMX controllers
- constant current for each channel individually adjustable from 200 - 1600 mAh in 50 mA steps
- output voltage for CC-compatible luminaires: 1 - 42V
- all settings via a simple menu via OLED display
- flicker free
- short-circuit proof and overload protection
- connection: screw terminals
- dimensions L x W x H: 135 x 69 x 36 mm
- power: max. 4x 60W



item	colour	price
843054	black	**119,95 €**



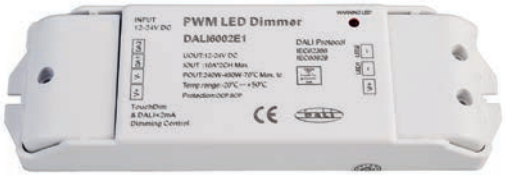


DALI LED PWM-DIMMER 1/2 CHANNEL

- for controlling 1-2 channel LED stripes [single, WW/CW components]
- dimmable via Dali Bus according to IEC 62386 / Device Type DT6
- overload / short circuit indication / switch-off
- dimensions L x W x H: 167 x 51 x 23 mm
- max. 5A each channel
- power: 2x 120W (240W) at 12 V, 2x 240W (480W) at 24 V

item	colour	price
843051	☐ white	**109,95 €**

12-24 Volt | CV | 1/2 CH

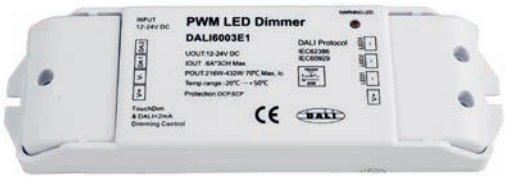


DALI LED PWM-DIMMER 3 CHANNEL

- for controlling 3 channel LED stripes [RGB components]
- dimmable via Dali Bus according to IEC 62386 / Device Type DT6
- overload / short circuit indication / switch-off
- dimensions L x W x H: 167 x 51 x 23 mm
- max. 6A each channel
- power: 3x 72W (216W) at 12 V, 3x 144W (432W) at 24 V

item	colour	price
843052	☐ white	**114,95 €**


12-24 Volt | CV | 3 CH

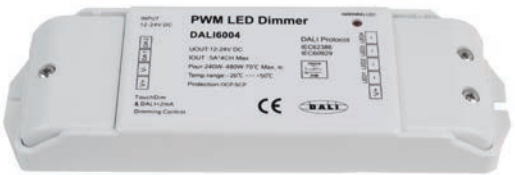

DALI LED PWM-DIMMER 4 CHANNEL

- for controlling 1-4 channel LED stripes
  [single, WW/CW, RGB, RGBW components]
- dimmable via Dali Bus according to IEC 62386 / Device Type DT6
- overload / short circuit indication / switch-off
- dimensions L x W x H: 167 x 51 x 23 mm
- max. 5A each channel
- power: 4x 60W (240W) at 12V,
  4x 120W (480W) at 24V

item	colour	price
843010	☐ white	**129,95 €**





With the kind support of SH-Lichttechnik, Pfullingen und Becks Reutlingen



ILLUMINANTS

764 G4
764 AR111
765 MR16/GU5,3
766 G9
767 GU10
768 GU10/ES111
769 E14
770 E27
774 R7s
774 GX53
775 neon tubes
776 metal vapour lamps



G4
page 764



G4
page 764



G53 QR111
page 764



MR16/GU5,3
page 765



MR16/GU5,3
page 765



G9
page 766



G9
page 766



GU10
page 767



GU10
page 767



GU10
page 767



GU10
page 768



GU10/ES111
page 768



E14
page 769



E14
page 769



E14
page 769



E27
page 770



E27
page 770



E27
page 770



E27
page 771



E27
page 771



E27
page 771



E27
page 772



E27
page 772



E27
page 773



E27
page 773



R7S
page 774



R7S
page 774

GX53
page 774



neon tubes
page 775



neon tubes
page 775



metal vapour lamps
page 776



metal vapour lamps
page 776



metal vapour lamps
page 776



metal vapour lamps
page 777

illuminants

OSRAM PARATHOM LED PIN G4



- plastic
- dimensions L x Ø: 36 x 13 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180213	colourless	ww 2700 K	200 lm	1,8 W	20 W	320°	F	2 kWh/1000h	**8,95 €**

12 Volt | G4 | LED | Ra>80 | 15000

PHILIPS COREPRO LEDCAPSULE G4



- plastic
- dimensions L x Ø: 40 x 15 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180193	silver	ww 2700 K	315 lm	2,7 W	28 W	300°	F	3 kWh/1000h	**18,95 €**

12 Volt | G4 | LED | Ra>80 | 15000

OSRAM PARATHOM PRO AR111 DIMMABLE



- plastic
- dimensions L x Ø: 55 x 111 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180207	grey	ww 2700 K	450 lm	7,4 W	35 W	24°	G	8 kWh/1000h	**36,95 €**
180206	grey	ww 3000 K	450 lm	7,4 W	35 W	24°	G	8 kWh/1000h	**36,95 €**

12 Volt | G53 QR111 | LED | Ra>90 | 40000 | + –



OSRAM PARATHOM MR16

- glass
- dimensions L x Ø: 46 x 51 mm

item	colour		colour temp.		light current	power	equivalent to	beam angle	EEI	energy consumption	price
180167		colourless	WW	3000 K	230 lm	2,6 W	20 W	36°	G	3 kWh/1000h	**7,95 €**
180183		colourless	NW	4000 K	230 lm	2,6 W	20 W	36°	G	3 kWh/1000h	**7,95 €**
180177		colourless	WW	3000 K	350 lm	3,8 W	35 W	36°	F	5 kWh/1000h	**8,95 €**
180175		colourless	NW	4000 K	350 lm	3,8 W	35 W	36°	F	5 kWh/1000h	**8,95 €**





OSRAM PARATHOM MR16 DIMMABLE

- glass
- dimensions L x Ø: 46 x 51 mm

item	colour		colour temp.		light current	power	equivalent to	beam angle	EEI	energy consumption	price
180176		colourless	WW	3000 K	230 lm	3,4 W	20 W	36°	G	4 kWh/1000h	**10,95 €**
180197		colourless	NW	4000 K	230 lm	3,4 W	20 W	36°	G	4 kWh/1000h	**10,95 €**
180168		colourless	WW	3000 K	350 lm	4,9 W	35 W	36°	G	6 kWh/1000h	**11,95 €**
180174		colourless	NW	4000 K	350 lm	4,9 W	35 W	36°	G	6 kWh/1000h	**11,95 €**
180219		colourless	WW	3000 K	621 lm	8,0 W	50 W	36°	G	9 kWh/1000h	**16,95 €**





OSRAM HALOPIN G9

- glass
- dimensions L x Ø: 43 x 14 mm

item	colour	colour temp.	light current	power	beam angle	EEI	energy consumption	price
666663	colourless	ww 3000 K	235 lm	20 W	360°	G	20 kWh/1000h	**3,95 €**
666662	colourless	nw 4000 K	460 lm	33 W	360°	G	33 kWh/1000h	**3,95 €**
666664	colourless	ww 3000 K	740 lm	48 W	360°	G	48 kWh/1000h	**3,95 €**





OSRAM P PIN G9

- plastic

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy cons.	dimensions L x Ø	price
180202	colourless	ww 2700 K	200 lm	1,9 W	20 W	360°	F	2 kWh/1000h	46 x 15 mm	**7,95 €**
180236	colourless	ww 2700 K	320 lm	2,6 W	30 W	360°	E	3 kWh/1000h	47 x 15 mm	**9,95 €**
180237	colourless	ww 2700 K	470 lm	4,2 W	40 W	360°	E	5 kWh/1000h	52 x 19 mm	**12,95 €**



OSRAM PARATHOM GU10



- glass
- dimensions L x Ø: 52 x 50 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180203	silver	WW 2700 K	350 lm	4,3 W	50 W	36°	F	5 kWh/1000h	**5,95 €**

220-240 Volt | GU10 | LED | 25000

PHILIPS MASTER VALUE GU10 DIMMABLE



- glass
- dimensions L x Ø: 54 x 50 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy cons.	price
180209	silver	WW 2700 K	270 lm	3,7 W	35 W	36°	F	4 kWh/1000h	**12,95 €**
180208	silver	WW 2700 K	355 lm	4,8 W	50 W	36°	F	5 kWh/1000h	**13,95 €**
180049	silver	WW 2700 K	355 lm	4,9 W	50 W	60°	F	5 kWh/1000h	**13,95 €**
180099	silver	WW 3000 K	365 lm	4,9 W	50 W	36°	F	5 kWh/1000h	**13,95 €**
180050	silver	WW 3000 K	365 lm	4,9 W	50 W	60°	F	5 kWh/1000h	**13,95 €**
180053	silver	NW 4000 K	380 lm	4,9 W	50 W	36°	F	5 kWh/1000h	**13,95 €**
180051	silver	NW 4000 K	380 lm	4,9 W	50 W	60°	F	5 kWh/1000h	**13,95 €**
180139	silver	WW 3000 K	575 lm	6,2 W	80 W	36°	F	7 kWh/1000h	**18,95 €**
180149	silver	NW 4000 K	575 lm	6,2 W	80 W	36°	F	7 kWh/1000h	**18,95 €**

220-240 Volt | GU10 | LED | Ra>80 | 25000 | + −

OSRAM PARATHOM GU10 DIMMABLE



- glass
- dimensions L x Ø: 52 x 50 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy cons.	price
180204	silver	WW 2700 K	575 lm	8,3 W	80 W	36°	G	9 kWh/1000h	**12,95 €**

220-240 Volt | GU10 | LED | Ra>90 | 25000 | + −



PHILIPS MASTER VALUE DT GU10 DIM-TO-WARM

- glass
- dimensions L x Ø: 54 x 50 mm
- dtw: dimming changes the colour temperature from 2700 to 2000 K

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180212	silver	WW 2000-2700 K	270 lm	3,7 W	35 W	36°	F	4 kWh/1000h	**17,95 €**
180113	silver	WW 2000-2700 K	355 lm	4,9 W	50 W	36°	F	5 kWh/1000h	**18,95 €**





ISOLED ES111 COB SPOT GU10 DIMMABLE

- glass
- dimensions L x Ø: 63,5 x 111 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180166	silver	WW 2700 K	1050 lm	13 W	75 W	75°	D	14 kWh/1000h	**79,95 €**
180163	silver	NW 4200 K	1400 lm	13 W	100 W	75°	E	14 kWh/1000h	**79,95 €**





PHILIPS COREPRO LEDCANDLE E14

- glass
- dimensions L x Ø: 97 x 35 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180238	milky	ww 2700 K	470 lm	4,3 W	40 W	360°	F	5 kWh/1000h	**8,45 €**

220-240 Volt | E14 | LED | Ra>90 | 15000



PHILIPS CLASSIC LEDCANDLE E14 DIM-TO-WARM

- glass
- dimensions L x Ø: 97 x 35 mm
- dtw: dimming changes the colour temperature from 2700 to 2000 K

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180199	colourless	ww 2200-2700 K	470 lm	3,4 W	40 W	270°	D	4 kWh/1000h	**12,95 €**

220-240 Volt | E14 | LED | Ra>90 | 15000 | dtw | + −



PHILIPS MASTER LEDLUSTRE E14 DIM-TO-WARM

- dimensions L x Ø: 95 x 50 mm
- dtw: dimming changes the colour temperature from 2700 to 2000 K

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180216	colourless	ww 2200-2700 K	470 lm	5,5 W	40 W	270°	F	6 kWh/1000h	**14,95 €**

220-240 Volt | E14 | LED | Ra>80 | 25000 | dtw | + −



PHILIPS MASTER LEDSPOT E27 PAR 30 DIMMABLE

- glass
- dimensions L x Ø: 88 x 96 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180179	colourless	WW 3000 K	760 lm	9,5 W	80 W	25°	F	10 kWh/1000h	**41,95 €**
180187	colourless	NW 4000 K	820 lm	9,5 W	80 W	25°	F	10 kWh/1000h	**41,95 €**

220-240 Volt | E27 | LED | Ra>80 | 25000 | + -



PHILIPS CLASSIC LEDLUSTER E27 P45 DIM-TO-WARM

- glass
- dimensions L x Ø: 78 x 45 mm
- dtw: dimming changes the colour temperature from 2700 to 2000 K

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180198	colourless	WW 2200-2700 K	340 lm	2,5 W	25 W	270°	D	3 kWh/1000h	**11,95 €**
180194	colourless	WW 2200-2700 K	470 lm	3,5 W	40 W	270°	D	4 kWh/1000h	**12,95 €**

220-240 Volt | E27 | LED | Ra>90 | 15000 | dtw | + -



DEKO-LIGHT LED FILAMENT E27 A60 DIMMABLE

- glass
- dimensions L x Ø: 105 x 60 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180055	milky	WW 2700 K	410 lm	4,4 W	40 W	300°	F	5 kWh/1000h	**6,95 €**

220-240 Volt | E27 | LED | Ra>80 | 15000 | + -



PHILIPS COREPRO LEDBULB E27 A60 DIMMABLE

- glass
- dimensions L x Ø: 104 x 60 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180214	milky	ww 2700 K	470 lm	3,4 W	40 W	150°	D	4 kWh/1000h	**11,95 €**

220-240 Volt | E27 | LED | Ra90 | 15000 | + −



OSRAM PARATHOM RETROFIT E27 A60 DIMMABLE

- glass
- dimensions L x Ø: 105 x 60 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180205	colourless	ww 2700 K	806 lm	6,5 W	60 W	360°	E	7 kWh/1000h	**8,45 €**

220-240 Volt | E27 | LED | Ra>80 | 15000 | + −



OSRAM PARATHOM CLASSIC E27 A75 DIMMABLE

- glass
- dimensions L x Ø: 105 x 60 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180239	milky	ww 2700 K	1055 lm	7,5 W	75 W	300°	D	8 kWh/1000h	**9,95 €**

220-240 Volt | E27 | LED | Ra>80 | 15000 | + −





DEKO-LIGHT LED FILAMENT E27 G95 DIMMABLE

- glass
- dimensions L x Ø: 140 x 95 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180058	colourless	ww 2700 K	450 lm	4,4 W	40 W	300°	F	5 kWh/1000h	**10,95 €**
180059	milky	ww 2700 K	410 lm	4,4 W	40 W	300°	F	5 kWh/1000h	**10,95 €**
180060	gold optics	ww 2200 K	380 lm	4,4 W	40 W	300°	F	5 kWh/1000h	**11,95 €**
180061	colourless	ww 2700 K	1010 lm	8,5 W	100 W	300°	F	9 kWh/1000h	**13,95 €**
180062	milky	ww 2700 K	930 lm	8,5 W	100 W	300°	F	9 kWh/1000h	**13,95 €**
180063	gold optics	ww 2200 K	860 lm	8,5 W	100 W	300°	F	9 kWh/1000h	**14,95 €**







DEKO-LIGHT LED FILAMENT E27 G125 DIMMABLE

- glass
- dimensions L x Ø: 173 x 125 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180064	colourless	ww 2700 K	450 lm	4,4 W	40 W	300°	F	5 kWh/1000h	**11,95 €**
180065	milky	ww 2700 K	410 lm	4,4 W	40 W	300°	F	5 kWh/1000h	**11,95 €**
180066	gold optics	ww 2200 K	380 lm	4,4 W	40 W	300°	F	5 kWh/1000h	**12,95 €**
180067	colourless	ww 2700 K	1010 lm	8,5 W	100 W	300°	E	9 kWh/1000h	**15,95 €**
180068	milky	ww 2700 K	930 lm	8,5 W	100 W	300°	F	9 kWh/1000h	**15,95 €**
180069	gold optics	ww 2200 K	860 lm	8,5 W	100 W	300°	F	9 kWh/1000h	**16,95 €**





DEKO-LIGHT LED FILAMENT E27 ST64 DIMMABLE

- glass
- dimensions L x Ø: 145 x 64 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI energy consumption	price
180070	gold optics	WW 2200 K	380 lm	4,4 W	40 W	300°	F 5 kWh/1000h	**10,95 €**
180071	gold optics	WW 2200 K	860 lm	8,5 W	100 W	300°	F 9 kWh/1000h	**14,95 €**





DEKO-LIGHT LED E27 RF RGBW MIT REMOTE CONTROL

- aluminium diecast
- dimensions L x Ø: 120 x 60 mm
- dimmable / colours adjustable via radio remote control

item	colour	colour temp.	light current	power	equivalent to	EEI energy consumption	price
180136	silver	RGB WW 3000 K	520 lm	8 W	60 W	A 8 kWh/1000h	**54,95 €**





OSRAM HALOLINE R7S 78MM DIMMABLE

- glass
- dimensions L x Ø: 74,9 x 12 mm

item	colour	colour temp.	light current	power	beam angle	EEI	energy consumption	price
332269	colourless	WW 2800 K	750 lm	48W	360°	C	48 kWh/1000h	**7,95 €**
332270	colourless	WW 2950 K	1400 lm	80W	360°	D	80 kWh/1000h	**7,95 €**
332271	colourless	WW 2950 K	2250 lm	120W	360°	C	120 kWh/1000h	**7,95 €**

220-240 Volt | R7S 78MM | Ra100 | 2000



PHILIPS COREPRO LED R7S 118MM DIMMABLE

- plastic
- dimensions L x Ø: 118 x 29 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180097	silver	WW 3000 K	1600 lm	14W	100 W	360°	E	14 kWh/1000h	**43,95 €**

220-240 Volt | R7S 118MM | LED | Ra>80 | 15000



ISOLED LED GX53

- plastic
- dimensions L x Ø: 28 x 75 mm

item	colour	colour temp.	light current	power	equivalent to	beam angle	EEI	energy consumption	price
180196	white	WW 3000 K	500 lm	6W	35 W	120°	D	6 kWh/1000h	**19,95 €**
180195	white	NW 4000 K	525 lm	6W	35 W	120°	D	6 kWh/1000h	**19,95 €**

220-240 Volt | GX53 | Ra >80 | 25000

OSRAM NEON TUBES T5



- glass
- acceptance only in whole unit of 20 pcs. per wattage
- electronical ballast required!

item	colour	colour temp.	light current	power	beam angle	EEI	energy consumption	dimensions L	price
162054	☐ milky	NW 4000 K	1200 lm	14W	360°	G	16 kWh/1000h	549 mm	**4,45 €**
162055	☐ milky	NW 4000 K	4450 lm	54W	360°	F	60 kWh/1000h	1149 mm	**5,45 €**

G5 T5 | Ra>80 | 24000

OSRAM NEON TUBES T8 PLUS



- glass
- acceptance only in whole unit of 25 pcs. per wattage
- electronical ballast required!

item	colour	colour temp.	light current	power	beam angle	EEI	energy consumption	dimensions	price
162047	☐ milky	NW 4000 K	1350 lm	18W	360°	G	20 kWh/1000h	590 mm	**3,95 €**
162044	☐ milky	CW 8000 K	1350 lm	18W	360°	G	20 kWh/1000h	590 mm	**9,95 €**
162048	☐ milky	NW 4000 K	5200 lm	58W	360°	G	64 kWh/1000h	1500 mm	**4,95 €**
162046	☐ milky	CW 8000 K	4900 lm	58W	360°	G	64 kWh/1000h	1500 mm	**12,95 €**

G13 T8 | Ra>80 | 20000

OSRAM HQI-TS POWERSTAR



- glass
- electronical ballast required!

item	colour	colour temp.	light current	power	beam angle	EEI	energy consumption	dimensions L x Ø	price
071WDL	colourless	WW 3300 K	5925 lm	70 W	360°	G	70 kWh/1000h	117 x 19 mm	**19,95 €**
071NDL	colourless	NW 4200 K	6500 lm	70 W	360°	G	70 kWh/1000h	117 x 19 mm	**19,95 €**
071DDL	colourless	CW 5600 K	6200 lm	70 W	360°	G	70 kWh/1000h	117 x 19 mm	**19,95 €**
151WDL	colourless	WW 3200 K	12000 lm	150 W	360°	G	150 kWh/1000h	135 x 23 mm	**19,95 €**
151NDL	colourless	NW 4200 K	12500 lm	150 W	360°	G	150 kWh/1000h	135 x 23 mm	**19,95 €**
151DDL	colourless	CW 5450 K	13000 lm	150 W	360°	G	150 kWh/1000h	135 x 23 mm	**19,95 €**

RX7S | 12000

PHILIPS CDM-TD MASTERCOLOUR



- glass
- electronical ballast required!

item	colour	colour temp.	light current	power	beam angle	EEI	energy consumption	dimensions L x Ø	price
501011	colourless	NW 4200 K	5600 lm	70 W	360°	G	70 kWh/1000h	119,5 x 22 mm	**44,95 €**
501012	colourless	WW 3000 K	13250 lm	150 W	360°	G	150 kWh/1000h	137,4 x 25 mm	**44,95 €**
501013	colourless	NW 4200 K	14200 lm	150 W	360°	G	150 kWh/1000h	137,4 x 25 mm	**44,95 €**

RX7S | 16000

PHILIPS CDM-T MASTERCOLOUR



- glass
- electronical ballast required!

item	colour	colour temp.	light current	power	beam angle	EEI	energy consumption	dimensions L x Ø	price
501000	colourless	WW 3000 K	3150 lm	35 W	360°	G	35 kWh/1000h	103 x 20 mm	**39,95 €**
501008	colourless	NW 4200 K	3300 lm	35 W	360°	G	35 kWh/1000h	103 x 20 mm	**39,95 €**
501001	colourless	WW 3000 K	6600 lm	70 W	360°	G	70 kWh/1000h	103 x 20 mm	**39,95 €**
501002	colourless	NW 4200 K	6600 lm	70 W	360°	G	70 kWh/1000h	103 x 20 mm	**39,95 €**
501003	colourless	WW 3000 K	14000 lm	150 W	360°	G	150 kWh/1000h	103 x 20 mm	**41,95 €**
501004	colourless	NW 4200 K	12700 lm	150 W	360°	G	150 kWh/1000h	103 x 20 mm	**41,95 €**

G12 | 12000



VENTURE HIT HALOGEN-METAL VAPOUR LAMP 250 W

- glass
- dimensions L x Ø: 245 x 46 mm
- electronical ballast required!

item	colour	colour temp.	light current	power	beam angle	EEI	energy consumption	price
501033	colourless	NW 4500 K	18300 lm	250 W	360°	G	264 kWh/1000h	**54,95 €**

E40 | 10000



VENTURE HIT HALOGEN-METAL VAPOUR LAMP 400 W

- glass
- dimensions L x Ø: 296 x 46 mm
- electronical ballast required!

item	colour	colour temp.	light current	power	beam angle	EEI	energy consumption	price
501032	colourless	NW 4000 K	41000 lm	400 W	360°	F	420 kWh/1000h	**59,95 €**

E40 | 10000



ACCESSORIES

782 indoor | dimming
784 indoor | dimming and switching
785 indoor | other
787 indoor | low voltage
788 indoor | low voltage | plug-in connector
791 outdoor | low voltage DC | WEIPU HQ plug-in connector
794 indoor / outdoor | DMX cable
796 indoor | high voltage
798 indoor | high voltage | plug systems
799 outdoor | high voltage | plug systems
801 outdoor | cable connectors
804 indoor / outdoor | mounting material for LED stripes and profiles
805 outdoor | mounting accessories
806 indoor / outdoor | chemical products



indoor
dimming
from page 782



indoor
dimming and switching
page 784



indoor
other
page 785



indoor
low voltage
page 787



indoor
low voltage
plug-in connector
from page 788



outdoor
low voltage DC
WEIPU HQ plug-in connector
from page 791



indoor / outdoor
DMX cable
page 794



indoor
high voltage
cable connectors
from page 796




indoor
high voltage
plug systems
page 798



outdoor
high voltage
plug systems
page 799



outdoor
cable connectors
from page 801



indoor / outdoor
mounting material for LED
stripes and profiles
page 804



outdoor
mounting accessories
page 805



indoor / outdoor
chemical products
from page 806

accessories

DIMMER | PHASE CONTROL



suitable for dimming of:

- R loads [light sources] 20 - 500 W
- L loads [konventionell wound transformers] 20 - 500 W
- max. 5 electronical ballast
- suitable for 68 mm flush-mounted / cavity wall sockets

item	colour	price
100484	☐ white	**79,95 €**

220-240 Volt | 20 - 500 Watt

DIMMER | PHASE CUT-OFF



suitable for dimming of:

- R loads [light sources] 10 - 350 W
- C loads [electrical electronical ballasts] 10 - 350 W
- max. 5 electronical ballast
- adjustable minimum load / brightness
- perfectly matched to DEKO-LIGHT power supplies
- suitable for 68 mm flush-mounted / cavity wall sockets

item	colour	price
930060	☐ white	**66,95 €**

220-240 Volt | 10 - 350 Watt

DIMMING VIA PHASE CONTROL/CUT-OFF

Please always ensure that the dimmer used is suitable for new installations and especially when retrofitting existing systems. You will find information on the housing as well as in the technical data sheets for which type of load, power and quantity of ballasts they are suitable.

types of electrical loads:
[R] = Ohmic load = light bulb, high-voltage halogen etc.
[L] = Inductive load* = wound transformers
[C] = Capacitive load* = high voltage LED, all electrical transformers

*Unless otherwise stated, max. 5 [C-load] or 2 [L-load] ballasts/lamps per dimmer.

You would like to dim and switch 230V components from several locations, but do not have the required number of cores in the existing installation? Then the following universal dimmer switches are ideally suited for simple and problem-free integration for both existing and new installations.

ELTAKO DIMMER UNIVERSAL 400W EUD12NPN-UC

- control via standard pushbutton [control voltage 10V-230V AC+DC]
- short keys [on / off], long keys [dimming 0-100-0%]
- suitable for R-L-C loads up to 400W, high voltage LEDs up to 100W, automatic load detection, memory-function, adjustable minimum load and dimming speed
- dimensions L x W x H: 20 x 90 x 70 mm



item	colour	price
843042	blue	**109,95 €**

220-240 Volt | max 400 Watt | + −

ELTAKO DIMMER UNIVERSAL 400W EUD61NPN-UC

- control via standard pushbutton [control voltage 10V-230V AC+DC]
- short keys [on / off], long keys [dimming 0-100-0%]
- suitable for R-L-C loads up to 400W, high voltage LEDs up to 100W, automatic load detection, memory-function, adjustable minimum load and dimming speed
- installation in junction box possible
- dimensions L x W x H: 45 x 45 x 18 mm



item	colour	price
843043	blue	**104,95 €**

220-240 Volt | max100/ 400W | + −

ELTAKO LED-DIMMER SWITCH ELD61/12-36V

- control via standard pushbutton [control voltage 10V-230V AC+DC]
- short keys [on / off], long keys [dimming 0-100-0%]
- suitable for 12V/24V/36V LED stripes and dimmable LED lamps
- power 48W at 12V, 96W at 24V
- soft-off for lamp protection
- memory-function, adjustable minimum brightness dimming speed
- dimensions L x W x H: 45 x 45 x 18 mm



item	colour	price
843033	blue	**99,95 €**

12-36 Volt | max 96W | + −

ELTAKO STEUERDIMMSCHALTER SDS61/1-10V

- control via standard pushbutton [control voltage 230V], that generates a 1-10V control signal [max. 40 mA] at the output
- short keys [on / off], long keys [dimming 0-100-0%]
- suitable for dimmbare power supply mit 1-10V control input
- switching output [ECG on / off] memory-function and adjustable dimming speed
- dimensions L x W x H: 45 x 45 x 33 mm

item	colour	price
843044	blue	**99,95 €**

220-240 Volt | 1-10 Volt | IP20



HIGH FREQUENCY MOTION SENSOR | MD1200

- angle of coverage 360°
- detection range 1 - 10 m
- switching time 5 sec - 30 min
- daylight threshold 5 - 2000 Lux
- suitable for switching all common illuminants / electronical ballast [R- / L- / C-loads]
- max. 5 electronical ballast
- dimensions L x W x H: 75 x 42 x 28 mm

item	colour	price
930036	white	**44,95 €**

220-240 Volt | 1 - 1200 Watt | IP20



MAGIC SWITCH

The MAGIC SWITCH is the invisible switch for a variety of applications. Mounted on a plate back or incorporated into a blind hole, it detects the movement taking place on the front of the plate and switches. The MAGIC SWITCH works only in connection with non-metallic surfaces and materials such as wood, glass, ceramics up to a material thickness of 19 mm.

item	colour	price
920132	black	**74,95 €**

220-240 Volt | 250 Watt | 35 | IP20





ELTAKO RC ELEMENT THREE-WAY RC12-230V

By inductive interference voltages on control and power lines, there is an increasing number of undesirable effects that linear LED lights, which have a very low power consumption, permanently glow or flash due to the design. By installing the RC extinguishing element in the electrical distributor [connection N, L1, L2, L3] inductive interference voltages are compensated / suppressed.

- dimensions L x W x H: 20 x 90 x 70 mm

item	colour	price
843045	blue	**64,95 €**

220-240 Volt | IP20



OVERVOLTAGE PROTECTION WITH CONTROL DISPLAY


Compact overvoltage protection that effectively prevents the premature failure of LED lights due to problems in power grids. For protection of 1-phase operated, non-dimmable LED lighting systems. Control LED to indicate correct operation. Depending on the connection there is the possibility of load circuit disconnection in case of a fault. IP67 design for direct installation in luminaires or upstream in junction boxes.

- plastic
- dimensions L x W x H: 37 x 30 x 20 mm

item	colour	price
843055	black	**21,95 €**

230-277 Volt | 10 A | IP67




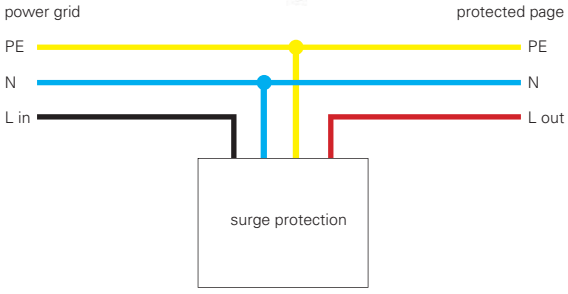

SAFETY SPACER

- for ceiling mounting rings from Ø 62 to 90 mm
- height 80 mm

item	colour	price
829063	black	**6,95 €**

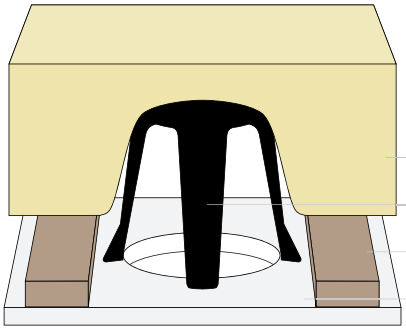




B

GU5,3 SOCKET

- ceramics
- thermo resistant connection cable



item	colour	connection cable	price
100200	white	15 cm	**1,25 €**
100250	white	50 cm	**2,25 €**

CV | 12 Volt | max 50 Watt | G4-GY6,35 | III

LOW VOLT SCREW DISTRIBUTOR SIX-WAY

- for fast cabling of up to 6 voltage-stable [CV] components on one power supply
- dimensions L x W: 63,5 x 26,0 mm
- 25 cm connection cable



item	colour	price
930006	white	**9,95 €**

CV | 12 Volt | max 250 Watt | III

CONNECTION DISTRIBUTOR FOR CURRENT-STABLE [CC] LUMINAIRES

- for fast cabling of up to 2 constant-stable [CC] components on one power supply for series connecting
- 3x 2 connectings 0,34 - 0,5 mm^2
- dimensions H x Ø: 11 x 35 mm



item	colour	price
930001	white	**3,95 €**

CC | max 6A | III

AMP-PLUG-IN DISTRIBUTOR SIX-WAY

- 2-pole version
- with quick connector / lock
- cable H03 VVH2-F 2x 0,75 mm²
- 10 cm connection cable




item	colour	price
053001	white	**5,95 €**

CV | 12 Volt | max 120 Watt | IP20 | III

AMP-EXTENSION LINE

- 2-pole version
- with quick connector / lock
- cable H03 VVH2-F 2x 0,75 mm²



item	colour	dimensions L	price
050100	white	100 cm	**4,95 €**
050200	white	200 cm	**5,95 €**

CV | 12 Volt | max 20 Watt | IP20 | III

AMP-PLUG WITH GU5,3 SOCKET

- 2-pole version
- with quick connector / lock
- 13 cm connection cable



item	colour	price
050222	white	**4,95 €**

CV | 12 Volt | max 20 Watt | G4 | MR16 GU5,3 | IP20 | III

MINI-AMP CONNECTION CABLE | EXTENSION CABLE





- 2-pole version
- ready-to-plug-in installation of pre-assembled component
- simple and reverse polarity protected installation

item	colour	version	dimensions L	price
940032	☐ white	connection cable - plug	30 cm	**2,95 €**
940036	☐ white	connection cable - plug	100 cm	**3,95 €**
940040	☐ white	connection cable - plug	200 cm	**4,95 €**
940044	☐ white	extension - plug/socket	50 cm	**5,95 €**
940048	☐ white	extension - plug/socket	100 cm	**6,95 €**
940052	☐ white	extension - plug/socket	200 cm	**7,95 €**

CV | 12/24 Volt | max 3A | IP20 | III

MINI-AMP MULTIPLE DISTRIBUTOR | PLUG - SOCKET



- 2-pole version
- ready-to-plug-in installation of pre-assembled component
- simple and reverse polarity protected installation

item	colour	version	connectings	price
940064	☐ white	three-way / 20 cm	1x plug, 3x socket	**6,95 €**
940065	☐ white	six-way / 20 cm	1x plug, 6x socket	**7,95 €**

CV | 12/24 Volt | max 3A | IP20 | III

MINI-AMP INSERT SWITCH | PLUG - SOCKET



- 2-pole version
- ready-to-plug-in installation of pre-assembled component
- simple and reverse polarity protected installation

item	colour	dimensions L	price
940066	☐ white	2x 100 cm	**12,95 €**

CV | 12/24 Volt | max 3A | IP20 | III

MINI-AMP ADAPTER MR16/GU5,3 | SOCKET - PLUG



- 2-pole version
- ready-to-plug-in installation of pre-assembled component
- easy mounting

item	colour	dimensions L	price
940067	☐ white	50 cm	**4,95 €**

CV | 12/24 Volt | max 3A | IP20 | III


SOURCE
PORT1
Junction Box
IP68
B3–2
PORT2



WEIPU HQ SOCKET / PLUG | 2-POLE

item	colour	version	price
940059	black	socket with screw cap	**13,95 €**
940060	black	plug	**13,95 €**
940058	black	socket special design	**13,95 €**

CV | 12/24/48 Volt | IP67 | III



WEIPU HQ SOCKET / PLUG | 4-POLE

item	colour	version	price
940063	black	socket with screw cap	**14,95 €**
940062	black	plug	**14,95 €**
940061	black	socket special design	**14,95 €**

CV | 12/24/48 Volt | IP67 | III



WEIPU HQ SOCKET / PLUG | 5-POLE

item	colour	version	price
940056	black	socket with screw cap	**15,95 €**
940057	black	plug	**15,95 €**

CV | 12/24/48 Volt | IP67 | III

WEIPU CABLE

When planning and installing low-voltage DC systems, always pay attention to the cable lengths. A total length of 10 metres must not be exceeded. Excessive lengths can lead to voltage losses within the cables, e.g. to different colour renditions of RGB spotlights or visible brightness differences. Malfunctions such as flashing, flickering or flashing of the lamps can also occur. Furthermore, each radiator should be supplied with a separate connection cable if possible. Avoid installations with more than 3 radiators within one cable harness.

WEIPU HQ

Our new Weipu HQ cable series provides the highest quality cables and connectors, as well as higher cable crosssections for even more reliability and durability for the power supply and operation of the corresponding spotlights.

WEIPU HQ SUPPLY CABLE | SOCKET 2-POLE

item	colour	dimensions L	price
940037	black	1 m	**22,95 €**
940038	black	3 m	**29,95 €**
940039	black	5 m	**37,95 €**

CV | 12/24/48 Volt | IP67 | III



WEIPU HQ SUPPLY CABLE | SOCKET 4-POLE

item	colour	dimensions L	price
940033	black	1 m	**27,95 €**
940034	black	3 m	**42,95 €**
940035	black	5 m	**55,95 €**

CV | 12/24/48 Volt | IP67 | III



WEIPU HQ SUPPLY CABLE | SOCKET | 5-POLE

item	colour	dimensions L	price
940029	black	1 m	**31,95 €**
940030	black	3 m	**47,95 €**
940031	black	5 m	**59,95 €**

CV | 12/24/48 Volt | IP67 | III



WEIPU HQ CONNECTION CABLE | 2-POLE

item	colour	dimensions L	price
940049	black	1 m	**34,95 €**
940050	black	3 m	**42,95 €**
940051	black	5 m	**49,95 €**

CV | 12/24/48 Volt | IP67 | III



WEIPU HQ CONNECTION CABLE | 4-POLE

item	colour	dimensions L	price
940045	black	1 m	**42,95 €**
940046	black	3 m	**56,95 €**
940047	black	5 m	**68,95 €**

CV | 12/24/48 Volt | IP67 | III



WEIPU HQ CONNECTION CABLE | 5-POLE

item	colour	dimensions L	price
940041	black	1 m	**47,95 €**
940042	black	3 m	**60,95 €**
940043	black	5 m	**72,95 €**

CV | 12/24/48 Volt | IP67 | III



WEIPU JUNCTION BOX

- 2 outgoing plug sockets
- dimensions L x W x H: 57 x 57 x 38 mm

item	colour	Pole	connection cable	price
730300	black	2	30 cm	**64,95 €**
730301	black	4	30 cm	**68,95 €**
940010	black	5	100 cm	**78,95 €**

CV | 12/24/48 Volt | IP67 | III



DMX-CONNECTION CABLE

- XLR-cable
- 3-pole plug / socket

item	colour	dimensions L	price
819066	black	1 m	**19,95 €**
819067	black	2 m	**22,95 €**
819070	black	5 m	**24,95 €**
819072	black	10 m	**29,95 €**
819071	black	20 m	**39,95 €**

DMX | IP20



DMX-CONNECTION CABLE OUTDOOR

- XLR-cable
- 3-pole plug / socket

item	colour	dimensions L	price
180704	black	2 m	**16,95 €**
180705	black	5 m	**26,95 €**
180706	black	10 m	**46,95 €**

DMX | IP65




DMX-CABLE ADAPTER | CAT5 AUF DMX XLR

item	colour	version	price
882271		DMX-plug to CAT5	**54,95 €**
882272		DMX-socket to CAT5	**54,95 €**

DMX | CAT 5 | IP20



illustr. shows DMX-plug

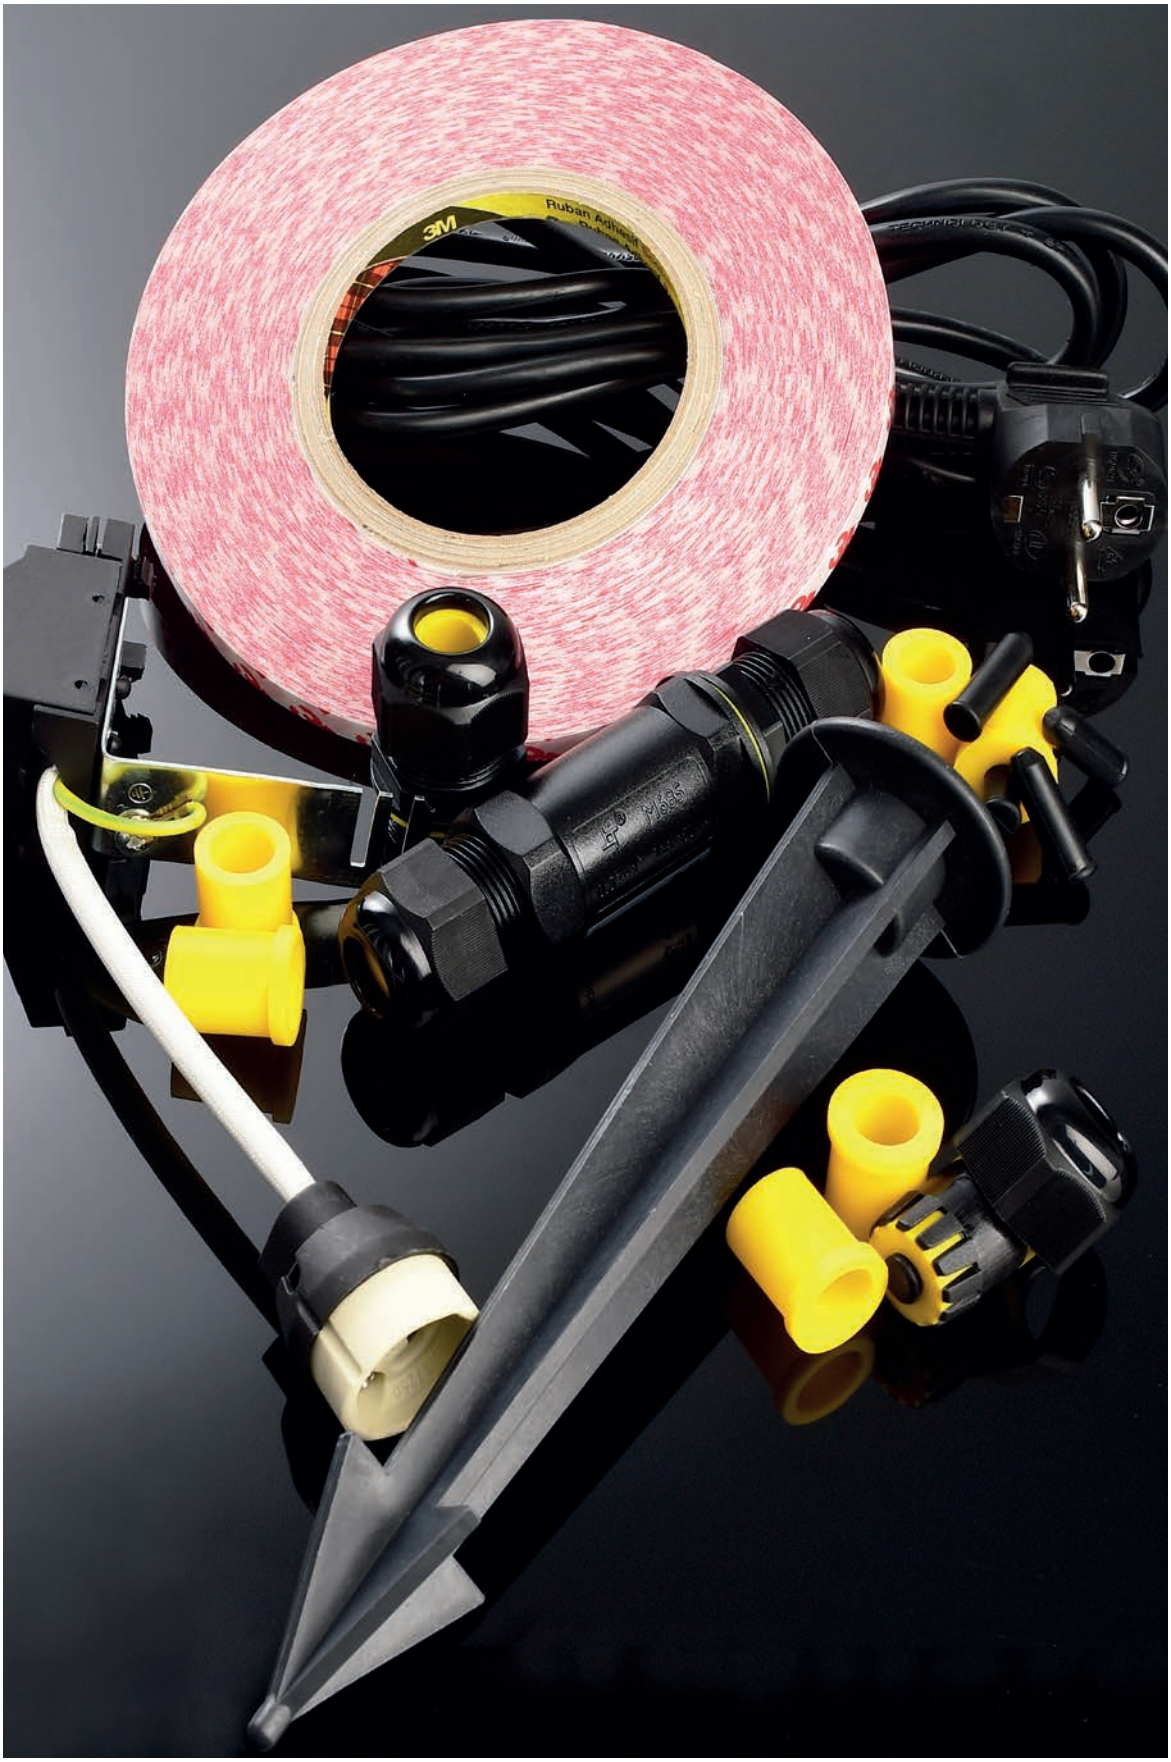
3M

CERAMIC CLAMPS



- 2-pole, with fixing hole
- cable bis max. 2,5mm²
- dimensions L x W x H: 21 x 18 x 10 mm

item	colour	price
100301	☐ white	**1,15 €**

220-240 Volt | max. 10 A | IP20

GU10 SOCKET



- ceramics
- 15 cm connection cable

item	colour	price
100202	☐ white	**3,45 €**

220-240 Volt | max 100 Watt | GU10 | IP20

GU10 SOCKET



- spacer combined with junction box
- separate connection for protective conductor
- 10 cm cable

Essential: screw fitting mandatory for using with assembling frame between spacer VDE.

item	colour	price
100204	☐ white	**4,45 €**

220-240 Volt | max 100 Watt | GU10 | IP20

CONNECTION CABLE WITH 230V MAINS PLUG

- plastic
- universally usable
- cable H07RN-F, 3x 1,5mm²
- open cable ends



item	colour	dimensions L	price
930587	black	2950 mm	**21,95 €**

220-240 Volt | max. 16 A | IP44





quick terminal



through-wiring

DEKOLIGHT QUICK CONNECT BOX 2-WAY 230V

- plastic
- universally applicable for quick connection or wiring of power supply units or luminaires
- 3-pole plug-in terminals for rigid or flexible cables [e.g. NYM] from 0.5 to 1.5mm²
- 15cm pre-installed 3-core cable for connection to SKI/SKII power supplies/luminaires
- open cable ends
- quick release fastener secured with additional screw
- for insertion into ceilings with min. 68mm round cut-out and starting from a ceiling gap of 25mm

item	colour	dimensions L x W x H	price	
930694	black	80 x 40 x 25 mm	**7,95 €**	NEW

220-240 Volt | max. 16 A | IP20

WIELAND GST18i3 PLUG | SOCKET | DISTRIBUTOR BLOCK







· high voltage, 3-pole, for wire cross section 0,75 - 2,5 mm²

item	colour	version	price
800105	black	plug	**7,95 €**
800100	black	socket	**7,95 €**
800115	black	distributor block, 1 input, 5 outputs	**26,95 €**

220-240 Volt | max. 16 A | IP20

WIELAND GST18i3 SUPPLY CABLE WITH SCHUKO PLUG



· high voltage, 3-pole, for wire cross section 3 x 1,5 mm²

item	colour	dimensions L	price
800116	black	200 cm	**19,95 €**

220-240 Volt | max. 16 A | IP20

WIELAND GST18i3 SUPPLY CABLE WITH SOCKET | PLUG





· high voltage, 3-pole, for wire cross section 3 x 1,5 mm²

item	colour	version	dimensions L	price
800109	black	socket	100 cm	**10,95 €**
800111	black	socket	300 cm	**16,95 €**
800112	black	plug	100 cm	**11,95 €**
800114	black	plug	300 cm	**16,95 €**

220-240 Volt | max. 16 A | IP20

WIELAND GST18i3 EXTENSION LINE



· high voltage, 3-pole, for wire cross section 3 x 1,5 mm²

item	colour	dimensions L	price
800106	black	100 cm	**16,95 €**
800107	black	200 cm	**18,95 €**
800108	black	300 cm	**22,95 €**

220-240 Volt | max. 16 A | IP20

WIELAND RST20i3 PLUG | SOCKET DISTRIBUTOR BLOCK | PROTECTIVE CAP



• high voltage, 3-pole, for wire cross section 1,5 mm² - 4,0 mm²

item	colour	version	price
800024	black	plug	**15,95 €**
800023	black	socket	**15,95 €**
800025	black	distributor block, 1 input, 3 outputs	**25,95 €**
800026	black	protective cap for plug	**3,95 €**
800027	black	protective cap for socket	**3,95 €**

220-240 Volt | max. 16 A | IP68

WIELAND RST20i3 SUPPLY CABLE WITH SCHUKO PLUG

• high voltage, 3-pole, for wire cross section 3 x 1,5 mm²
• mains plug IP44 / socket IP68



item	colour	dimensions L	price
800028	black	400 cm	**69,95 €**

220-240 Volt | max. 16 A | IP68

WIELAND RST20i3 SUPPLY CABLE

• high voltage, 3-pole
• with socket and open end
• cable type H07RN-F3
• G1/5 1,5 mm²



item	colour	dimensions L	price
800033	black	200 cm	**29,95 €**

220 Volt | max. 16 A | IP68

WIELAND RST20i3 CONNECTION CABLE SOCKET | PLUG

• high voltage, 3-pole
• cable type H07RN-F3
• G1/5 1,5 mm²



item	colour	dimensions L	price
800029	black	200 cm	**34,95 €**
800036	black	400 cm	**48,95 €**

220 Volt | max. 16 A | IP68

MULTI OUTDOOR CABLE DISTRIBUTORS

The more luminaires and accompanying lighting solutions are planned and project, the more complex the cable management becomes. A wide variety of cable and wire cross-sections come together and have to be connected as efficiently as possible. In outdoor areas, there are requirements are added to protect cables against external influences. With the new, multifunctional cable connectors and distributors, you are perfectly equipped for these tasks.

All multi-outdoor cable distributors are supplied with the appropriate adapter sleeves in order to be able to insert different cable cross-sections, depending on the model.

waterproof cable glands

supplied blind plugs for unused cable entries
cable entries

access to cables via screwed, waterproof cover



OUTDOOR CABLE CONNECTORS GELBOX IPX8

- set consisting of 2 gel boxes
- silicone
- dimensions L x W x H: 38 x 30 x 26 mm
- suitable for 3 x 2,5mm² / 5 x 2,5mm²



item	colour	price
930402	colourless	**28,95 €**

IP68

MULTI OUTDOOR CABLE CONNECTORS | CONNECTION SLEEVE

- waterproof cable glands M25
- for 2 cable 4-14 mm [adapter grommets included]
- for 2-5 cores 0,5-4 mm²
- L x W x H: 112,53 x 29,50 x 32,56 mm
- observe installation instructions



item	colour	price
930571	black/yellow	**17,95 €**

12-230 Volt | max. 24 A | IP68 [2 m]

MULTI OUTDOOR Y-CABLE CONNECTORS | CONNECTION SLEEVE

- waterproof cable glands M25
- for 3 cable 4-14 mm [adapter grommets included]
- for 2-3 cores 0,5-4 mm²
- L x W x H: 139,71 x 71,88 x 32,56 mm
- observe installation instructions



item	colour	price
930573	black/yellow	**19,95 €**

12-230 Volt | max. 24 A | IP68 [2 m]

MULTI OUTDOOR CABLE DISTRIBUTOR 2-FOLD

- waterproof cable glands M20
- for 2 cable 5-12 mm [adapter grommets included]
- for cores 0,5-2,5 mm²
- Ø x H: 65,33 x 46,31 mm
- cover: quick screw connection [screwless]
- observe installation instructions

item	colour	price
930578	black	**9,95 €**

12-230 Volt | max. 24 A | IP66



MULTI OUTDOOR CABLE DISTRIBUTOR 2-FOLD

- waterproof cable glands M20
- for 2 cable 5-12 mm [adapter grommets included]
- for cores 0,5-2,5 mm²
- L x W x H: 138,20 x 42,77 x 35,70 mm
- cover verschraubt [screws included in delivery]
- observe installation instructions

item	colour	price
930576	black/yellow	**12,95 €**

12-230 Volt | max. 24 A | IP68 [2 m]



MULTI OUTDOOR CABLE DISTRIBUTOR 4-FOLD

- waterproof cable glands M25
- for 2-4 cable 4-14 mm [adapter grommets included]
- for cores 0,5-4,0 mm²
- L x W x H: 112,54 x 93,30 x 35,30 mm
- cover verschraubt [screws included in delivery]
- observe installation instructions

item	colour	price
930575	black/yellow	**19,95 €**

12-230 Volt | max. 24 A | IP68 [2 m]



MULTI OUTDOOR STRAIGHT JOINT CAPSULE 4-FOLD

- spacious socket
- for 2-4 cable 6-14 mm
- for cores bis 2,5 mm²
- Ø x L: 70 x 190 mm
- FDM1: humic acid and corrosion resistant
- quick screw connection [screwless]
- incl. 8 cable ties 150,00 x 2,20 mm
- observe installation instructions



item	colour	price
730275	black/yellow	**48,95 €**

12-230 Volt | max. 24 A | IP68 [1 m]





MULTI OUTDOOR CABLE DISTRIBUTOR 10-FOLD

- waterproof cable glands M25
- for 2-10 cable 4-14 mm [adapter grommets included]
- for cores 0,5-4,0 mm²
- L x W x H: 182,95 x 135,30 x 49,10 mm
- cover verschraubt [screws included in delivery]
- observe installation instructions

item	colour	price
930574	black/yellow	**42,95 €**

12-230 Volt | max. 24 A | IP68 [2 m]

ASSEMBLY SET FOR IP65/IP67 LED-STRIPES

- set consists of:
  15 silicone retaining clips
  30 stainless steel screws
  5 end caps
- delivery without silicone/adhesive




item	colour	for stripes with outer dimension	price
840293	colourless	11-12 mm	**4,95 €**
840294	colourless	13-15 mm	**4,95 €**
840295	colourless	17-19 mm	**4,95 €**

end cap seal

930104	natural stone sealant	**39,95 €**

3M™ DOUBLE-SIDED TAPE

- for mounting aluminium profiles or LED strips [not IP65/67 silicone strips] on smooth surfaces

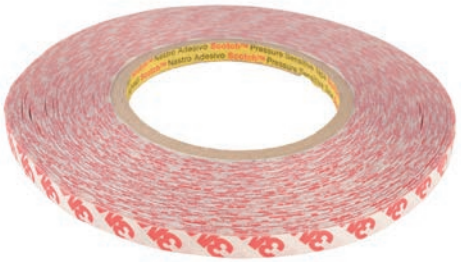

item	colour	dimensions L x W x H	price
930345	white	50000 x 08 x 0,20 mm	**19,95 €**
930346	white	50000 x 10 x 0,20 mm	**21,95 €**
930347	white	50000 x 12 x 0,20 mm	**23,95 €**
930348	white	50000 x 15 x 0,20 mm	**26,95 €**
930349	white	50000 x 20 x 0,20 mm	**34,95 €**
930350	white	50000 x 25 x 0,20 mm	**42,95 €**

3M™ DOUBLE-SIDED TAPE FOR SILICONE SURFACES

- special adhesive tape for use on LED stripes in silicone hoses and silicone casting
- high solvent resistance
- high temperature resistance
- high initial liability
- high bond strength on most silicone surfaces and hard-to-stick substrate



item	colour	dimensions L x W x H	price
930405	white	55000 x 10 x 0,127 mm	**174,95 €**
930406	white	55000 x 12 x 0,127 mm	**204,95 €**



PRESSURE / MOISTURE COMPENSATING VALVE WITH MEMBRAN



- plastic
- set of 5
- minimisation of condensation due to integrated liquid-tight and breathable membrane
- for retrofitting luminaires that are used in warm and humid areas / environments
- pressure rang: P=7Kpa
- incl. plastic flat nut

item	colour	Ø	max. air exchange	price
930583	■ black	M5	380 ml/min.	**14,95 €**
930584	■ black	M8	800 ml/min.	**15,95 €**
930585	□ white	M10	1200 ml/min.	**16,95 €**
930586	□ white	M16	2200 ml/min.	**18,95 €**

IP67

GROUND SPIKE IN CONNECTION WITH INSERT NUT



design example

- plastic / metal
- for ground anchoring of surface-mounted luminaires in the ground

item	colour	Ø	dimensions L x Ø	price
700230	■ black	M5	200 x 50 mm	**5,95 €**
930426	■ black	M5	170 x 40 mm	**9,95 €**
700229	■ black	M6	160 x 43 mm	**5,95 €**
730349	■ black	M6	210 x 45 mm	**7,95 €**
930427	■ black	M10	219 x 45 mm	**12,95 €**

WALL BRACKET / DISPLAYARM

- metal
- dimensions L: 80 cm
- carrying capacity max. 4,5 kg
- for mounting surface-mounted luminaires at a distance to the object / advertising sign
- optimal for the illumination of advertising signs on facades
- due to different applications delivery without mounting material



item	colour	price	
930659	■ black	**72,95 €**	NEW

ISOLATING SPRAY

- spray can, 400 ml
- spray forms a flexible, UV-resistant protective coating for LED strips, connecting leads, electronic components and electrical connections

item	colour	price	
930663	colourless	**45,95 €**	NEW



GEL ADHESIVE FOR GLUING END CAPS

- cyanoacrylate instant adhesive
- tube 3g
- high initial adhesion
- very good adhesion to almost all substrates such as metals, steel, stainless steel, galvanised steel, aluminium, plastics [e.g. ABS, GRP, hard PC] or ceramic materials
- curing time: 8-12 Stunden
- observe safety and processing instructions

item	colour	price
930593	colourless	**5,95 €**





MOUNTING GLUE

- bond+seal power
- cartridge, 310 ml
- highly resilient, elastic 1-component construction adhesive
- very good adhesion on almost all surfaces like e.g. metals, steel, stainless steel, galvanised steel, aluminium, plastics [e.g. ABS, GFK, rigid PVC] or ceramic materials
- UV-resistant
- approved according to NSF food law [NSF, P1 registered: 136996]
- high initial strength
- overpaintable with all commercial paint systems [except alkyd resin varnishes]

item	colour	price
930105	☐ white	**35,95 €**



NATURAL STONE SEALANT

- cartridge, 310 ml
- suitable for gluing profile covers and for use in wet rooms
- does not attack the surface of LEDs/stripes
- permanently elastic
- high resistance to weathering, UV, ageing and colour
- excellently suited for heavy outdoor use

item	colour	price
930104	☒ colourless	**39,95 €**



SEALANT SMOOTHING AGENT

- spray can, 400 ml
- universally suitable for clean stripping for all types of sealants [e.g. silicones, polyurethane sealants etc.]
- easy processing from the aerosol can
- through uniform cross-linking of the surface the sealant joint hardens faster and the surface is improved

item	colour	price
930103	☒ colourless	**39,95 €**



LIGHT COLOUR SELECTABLE

Luminaires with the designation "CCT Dip" allow you to change the light colour via a small dip switch [usually in the steps 3000K / 4000K / 5000K]. With their high application flexibility, CCT Dip luminaires offer customers who are still unsure about the light colour an enormous decision-making aid - and incidentally reduce your stock requirements.



The colour temperature [light colour] is specified in Kelvin [K] and determines how the respective light is perceived.

WW = warm white light	2.300 K to 3.300 K [high red component]
NW = neutral white light	3.300 K to 5.300 K
CW = cool white / daylight white light	5.300 K to 8.000 K [high blue content]

The following guide values apply as orientation for different rooms following guide values apply:

living and sleeping are	WW
kitchen and bathroom	WW | NW
offices	NW
industry	NW | CW
photo studio / architectural lighting	CW

COLOUR RENDERING INDEX RA

The colour rendering index Ra is the measure of the correspondence of the perceived light colour between an existing lighting situation and a reference light source. The smaller the deviation, the better the colour rendition.
A light source with Ra 100 reproduces all colours exactly. The lower the Ra value, the less precisely the colours are reproduced.

Standard values:

Incandescent bulb, halogen lamps	up to Ra 100
LED lamps	Ra 75-95
Compact fluorescent and energy-saving lamps	Ra 80-89
Fluorescent lamps	Ra 70-85



RA 70-80 medium colour rendition




RA 80-90 good colour rendition



RA 90-100 very good colour rendition

HCL

HCL stands for "Human Centric Lighting" and means the simulation of lighting situations according to the biological day-night rhythm of humans. HCL matches artificial light indoors to natural daylight and promotes well-being, mood and health. Numerous DEKO-LIGHT luminaires can already be integrated into an HCL control system to adjust the light colours to the biorhythm. In addition, several LED stripes in different light colours can be combined in one profile and thus integrated into the HCL lighting design.

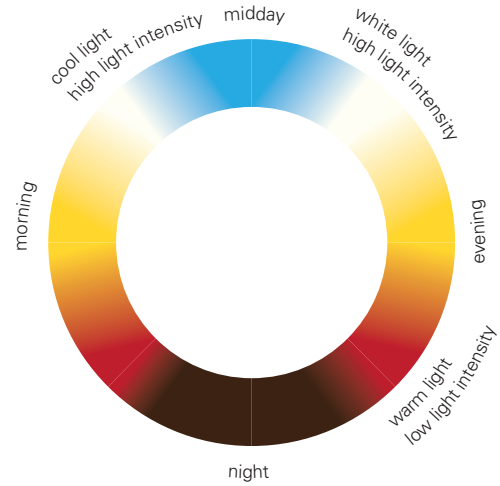

UGR VALUE

The smaller the UGR value, the more glare-free a luminaire emits its light. Especially in office areas, luminaires with a UGR value of less than 19 should be used to avoid disturbing reflections. When determining the UGR value of a complete room, additional factors such as wall colour[s] and surface finishes play a role.

DIM TO WARM

With the dim-to-warm function, you not only adjust the luminous intensity downwards, but by simultaneously changing the light colour [e.g. from 3000 to 2000 K], you obtain a room mood adapted to the new situation. LED luminaires with dim-to-warm technology can therefore be used particularly flexibly.



DALI DIMMABLE

Luminaires that can be dimmed via DALI can be perfectly integrated into lighting/property management systems. The great advantage lies in the wiring: via DALI, all luminaires in a line can be individually addressed and controlled. But this variant is also suitable for individual luminaires: DALI dimmers without an address exist for this purpose, which address the power supply unit directly. The good news: most systems on the market already have DALI interfaces.



HIGH LUMEN PACKAGE

Luminaires with high lumen values are ideal for illuminating rooms or corridors. With the right wall luminaires, you can achieve the prescribed lux values for corridors [100 lux] in many cases without additional ceiling lighting.

WHAT IS HOW BRIGHT?

How many lumens do different lamps shine with?

candle	~ 12 lm
100W incandescent bulb	~ 1.340 lm
40W fluorescent lamp	~ 3.000 lm

HOW MANY LUMENS CORRESPOND HOW MANY WATT?

Luminous efficacy is measured in lumens per watt [lm/W] and indicates how efficiently a lamp shines and how nergy is converted into light.

guide values:

incandescent bulb	approx 10 lm/W
halogen lamp	approx 20 lm/W
fluorescent lamp	approx 70-90 lm/W
LED lamp	approx 60-170 lm/W

WHERE DO I NEED HOW MANY LUMENS?

You should plan for these lumens per square metre, so that your home is optimally and comfortably illuminated:

guide values:

living room	approx 140 lm/m²
bedroom	approx 140 lm/m²
children's room	approx 140 lm/m²
hallway	approx 140 lm/m²
study	approx 280 lm/m²
kitchen	approx 280 lm/m²
bathroom	approx 280 lm/m²

WHAT DOES »LUX« MEAN?

Lux [lx] is the physical unit of the illuminance of a light source. This photometric quantity indicates how much luminous flux from a light source falls on a given surface.

Of course, the following values do not have to be achieved in the entire room.

guide values:

bedroom	45 Lux
living room	77 Lux
bathroom	110 Lux
hallway	207 Lux
study/office	300 Lux [at desk: 500 Lux]



IK VALUE

In addition to the IP protection class, you should also keep an eye on the IK value of a luminaire, which is increasingly required within the scope of tenders and for installations in public spaces. The IK value [or IK impact resistance level] indicates how impact-resistant a luminaire or certain components are. IK00 offers no protection against external mechanical stress, IK10 or IK10+ means that the luminaire can withstand a 5 or 10 kg test weight from a distance of 40 or 50 cm.

There are eleven codes, corresponding to the impact energy that a enclosure can withstand. [source: wikipedia.org]

Code	impact energy in joules	corresponds to drop height in mass
IK00	no protection	
IK01	0,14	7 cm - 200 g
IK02	0,20	8 cm - 250 g
IK03	0,35	14 cm - 250 g
IK04	0,50	20 cm - 250 g
IK05	0,70	28 cm - 250 g
IK06	1,0	40 cm - 250 g
IK07	2,0	40 cm - 500 g
IK08	5,0	25 cm - 2000 g
IK09	10,0	20 cm - 5000 g
IK10	20,0	40 cm - 5000 g
IK10+	50,0	50 cm - 10000 g

CHANGEABLE LED CHIPS

We want to leave our children a world worth living in. With the advent of LED technology, many luminaires could no longer be repaired and became disposable products. Thanks to a high recycling rate, a large part of the raw materials can already be returned to the system - nevertheless, we want to do even better: Ideally, the LED or the POWER SUPPLY of every DEKO-LIGHT luminaire can be replaced in the event of a malfunction. With the new Green Label »LED chip replaceable«, the DEKO-LIGHT brand is sending an unmistakable signal: Luminaires with this label enable environmentally friendly replacement of LED chips. In combination with low power consumption and a long service life, DEKO-LIGHT luminaires are already helping to reduce the burden on the environment. Support us in this and look out for the Green Label at DEKO-LIGHT.



WHAT IS THE »AVERAGE RATED LIFE« OF AN LED?


The average rated service life of LEDs covers the period from the first time they are switched on until the time when only 50 percent of the LEDs tested are still functioning properly.

A specified service life of 30,000 hours for an LED stripe therefore means that after this period, on average, half of all stripes will have failed.


WHAT DOES »BINNING« MEAN?

Binning guarantees a constant quality of light with the same brightness level and uniform light colour. For this purpose the LEDs of a production batch are sorted and divided into so-called »bins«.

NORM TABLE



BINNINGS



WHITE LEDS



With the kind support of Licht von Klein / www.licht-von-klein.de

IP PROTECTION ZONES

ZONE 3 | IP23

Outside zones 0 to 2, no special IP protection is necessary, provided no cleaning with direct water irradiation takes place.

ZONE 2 | IP44


In the areas 60 cm from zone 1, IP X4 protection applies.


ZONE 1 | IP65

In the wall area of the shower as well as in the tile area exposed to IP X5 is specified for the wall area of the shower and in the tile area exposed to splash water [max. 50 V].

ZONE 0 | IP67

In bathtubs and shower trays, low-voltage [max. 12 V] is absolutely required. The minimum IP protection is IP X7 [protected against water penetration].

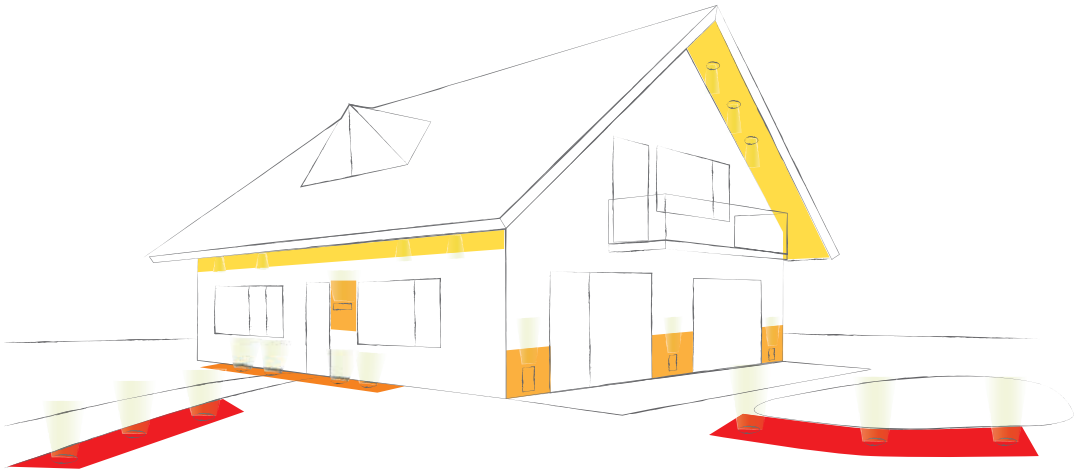


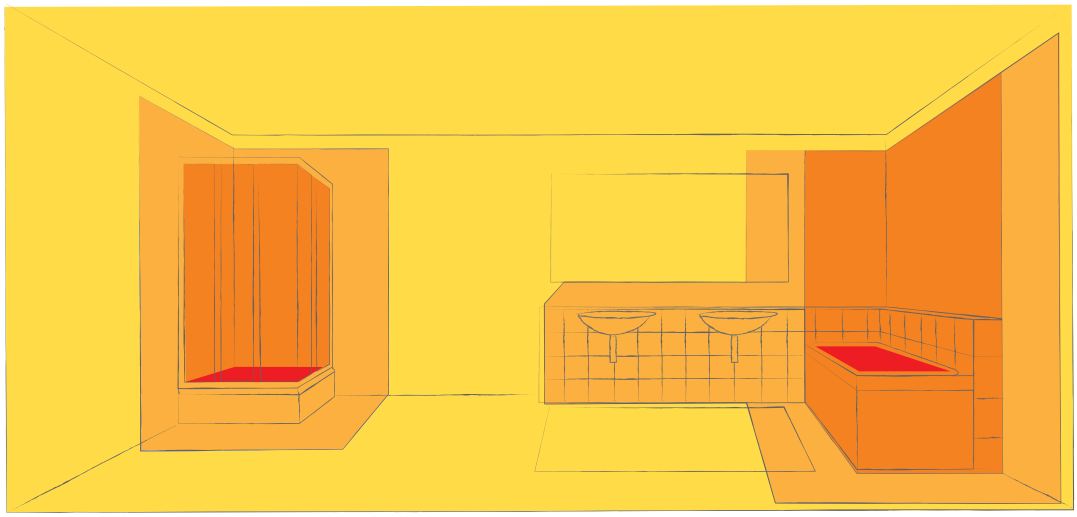

PROTECTION TYPES AND INSULATION CLASSES

Luminaires and other electrical appliances have a housing that protects live parts from contact, moisture or other environmental influences. This protection depends on the respective area of application. In order to have an overview of the suitable application, all devices are assigned to a classified protection type and an insulation class.

IP67

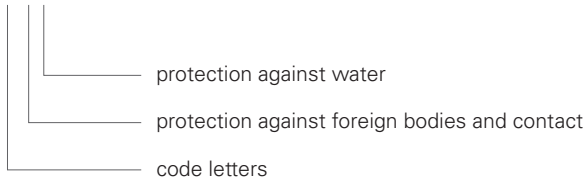

1. digit	protection against foreign bodies and contact	2. digit	protection against water
0	no protection	0	no protection
1	arge foreign bodies [Ø > 50 mm] large body parts [e.g. back of the hand]	1	protection against vertically falling dripping water
2	medium-sized foreign bodies [Ø > 12 mm] finger	2	protection against dripping water falling at an angle [up to 15°]
3	small foreign bodies [Ø > 2,5 mm] tools and wires [Ø > 2,5 mm]	3	protection against water spray up to 60° from vertical
4	granular foreign bodies [Ø > 1 mm] tools and wires [Ø > 1 mm]	4	protection against splashing water on all sides
5	dust deposit complete protection against accidental contact	5	protection against jet water
6	dust entry complete protection against accidental contact	6	protection against jet water
		7	protection against temporary immersion
		8	protection against permanent immersion

ELECTRIC CHARACTERISTICS



operating voltage range of product
alternative current [AC] / direct current [DC]



constant voltage + operating voltage



constant current + amperage


flicker free



power consumption


solar panel


USB charging socket


battery operation

LAMP



LED technology:
chip on board + surface mounted device



[Number] LED exchangeable


changeable LED chips



[Number] LED not exchangeable



LED type and design



base of lamp + halogen and LED applicable
[not included in delivery scope]



base of lamp + halogen and LED applicable
[included in delivery scope]



base of lamp + LED applicable
[included in delivery scope]



average service life in hours



power consumption



light colour [colour temperature]




colour display

FUNCTIONALITY



beam angle



swivel-mounted +
double swivel-mounted +
rotatable and swivel-mounted + rotatable



max. inclination angle


radiation direction

MOUNTING



cutout dimension in mm



mounting depth in mm

SURFACE


NANO coating IP XX [see product description]
lotus effect: Water rolls off and takes all dirty surface particles with it.


surface paintable /
individual design

CONTROL



dim to warm function



radio frequency control



Bluetooth control



WiFi control


movement sensor [IR / HF]




DMX control



signal cable



dimmable



number of channels

SAFETY



IP protection class



IK value


walkable


passable


safety lamp control gear



components may be installed on fixtures of materials,
the fire behavior of which is not always known.



max. surface temperature
of lamp control gear


protection class I


protection class II
[protective isolation]



protection class III
[protective low voltage]



no cool beam
In lamps identified as such,
no cold light mirror lamps may be installed.

0
000097 726
000099 726
000103 726
000104 726
000106 726
000107 726
000109 726
000140 726
000141 726
000142 726
001621 337
001623 337
050100 788
050200 788
050222 788
053001 788
071DDL 776
071NDL 776
071WDL 776

1
100028 432
100032 166
100078 164
100079 164
100084 159
100088 159
100089 159
100108 498
100109 498
100111 483
100112 483
100114 484
100116 484
100122 159
100123 162
100124 163
100125 162
100133 485
100138 163
100139 162
100140 156
100141 156
100142 157
100143 156
100144 156
100145 157
100146 158
100147 158
100148 159
100149 156
100150 156
100151 158
100152 167
100153 167
100200 787
100202 796
100204 796
100238 432
100250 787
100301 796
100484 782
110000 98
110001 98
110002 98
110003 99
110004 99
110007 99
110010 100
110011 101
110014 102
110015 102
110016 102
110017 103
110018 103
110019 103
110020 103
110021 103
110022 103
110027 97
110028 97
110029 97
110030 97
110032 94
110033 94
110034 94
110035 94
110036 94
110037 94
110100 104
110101 104
110222 95
110421 105
110427 105
110500 106
110501 106
110503 106
111821 105
122416 80
122417 80
122420 107
126070 107
126073 107
126074 107
131005 458
131006 458
150921 727
151DDL 776
151NDL 776
151WDL 776
162044 775
162046 775
162047 775
162048 775
162054 775
162055 775
180049 767
180050 767
180051 767
180053 767
180055 770
180058 772
180059 772
180060 772
180061 772
180062 772
180063 772
180064 772
180065 772
180066 772
180067 772
180068 772
180069 772
180070 773
180071 773
180097 774
180099 767
180113 768
180136 773
180139 767
180149 767
180163 768
180166 768
180167 765
180168 765
180174 765
180175 765
180176 765
180177 765
180179 770
180183 765
180187 770
180193 764
180194 770
180195 774
180196 774
180197 765
180198 770
180199 769
180202 766
180203 767
180204 767
180205 771
180206 764
180207 764
180208 767
180209 767
180212 768
180213 764
180214 771
180216 769
180219 765
180236 766
180237 766
180238 769
180239 771
180512 713
180513 713
180514 713
180515 725
180529 725
180704 794
180705 794
180706 794

3
332269 774
332270 774
332271 774
341010 192
341033 192
341035 193
341057 194
341062 193
341065 194
341105 193
341176 189
341177 189
341178 188
341180 184
341183 182
341184 182
341185 182
341187 188
341188 174
341189 174
341190 174
341194 174
341195 174
341196 174
341197 176
341198 176
341200 180
341201 180
341202 180
341203 180
341205 191
341206 191
341207 178

341208 178
341209 179
341210 179
341215 173
341216 172
341217 172
341222 190
341223 194
341224 190
341225 192
341228 207
341229 207
341232 173
341236 205
341237 205
341242 205
341243 205
341244 396
341245 396
341248 196
342024 17
342025 24
342026 24
342027 25
342028 25
342029 24
342030 24
342031 25
342032 25
342049 34
342050 34
342051 34
342052 34
342053 34
342054 34
342089 253
342090 253
342091 253
342092 253
342093 253
342094 253
342095 16
342096 16
342101 18
342102 18
342103 18
342104 18
342109 30
342114 28
342115 28
342116 26
342117 26
342118 32
342119 32
342120 32
342121 32
342128 17
342129 11
342130 11
342131 11
342132 11
342133 11
342134 11
342135 11
342136 11
342137 36
342138 36
342142 20
342143 20
342144 22
342145 22
342146 251
342147 251
342148 45
342149 45
342150 45
342151 45
342158 252
342159 170
342160 170
342169 46
342170 9
342171 9
342172 9
342173 9
342174 9
342175 9
342176 9
342177 13
342178 13
342179 13
342180 13
342181 13
342182 13
342183 43
342184 43
342185 43
342186 43
342187 43
342188 43
342189 41
342190 41
342191 41
342192 41
342193 41
342194 41
342195 41
342196 41
342197 41
342198 41
342199 41
342200 41
342201 39
342202 39
342203 39
342204 39
342205 39
342206 39
342207 39
342208 39
342209 39
342210 39
342211 39
342212 39
342213 14
342214 14
342215 15
342216 15
342217 15
342218 15
342219 255
342220 255
342221 255
343016 261
343017 218
343020 216
343021 216
343022 259
343023 263
343024 263
343025 210
343026 210
343028 213
343029 213
343030 257
343031 220
343032 257
343033 263
343034 257
343035 257
343036 265
346003 216
346004 216
346009 352
346010 218
346011 351
346012 351
346013 351
346014 351
346015 210
346016 210
346017 212
346018 212
346025 344
346026 215
346027 215
346028 215
346029 215
346030 215
346031 215
346032 344
346033 344
346034 344
346035 344
346036 344
346037 344
346038 348
346039 348
346040 348
346041 346
346043 346
346044 220
348001 81
348002 81
348004 81
348005 81
348007 428
348009 428
348011 428
348013 82
348022 80
348023 80
348024 80
348025 80
348045 426
348046 426
348048 82
348049 82
348051 64
348052 64
348069 428
348070 428
348071 429
348072 429
348073 70
348074 70
348075 71
348076 72
348077 72
348078 73
348085 74
348086 74
348087 75
348099 83
348107 77
348120 427
348121 427
348122 78
348123 78
348124 76

348125 ... 76
348127 ... 79
348128 ... 83
348138 ... 275
348139 ... 275
348140 ... 282
348141 ... 67
348142 ... 67
348143 ... 67
348144 ... 67
348145 ... 67
348146 ... 67
348147 ... 89
348151 ... 283
348152 ... 282
348153 ... 84
348154 ... 84
348155 ... 85
348156 ... 85
348157 ... 85
348158 ... 85
348159 ... 85
348160 ... 85
348161 ... 86
348162 ... 86
348163 ... 87
348164 ... 87
348165 ... 87
348166 ... 87
348167 ... 87
348168 ... 87
348169 ... 70
348170 ... 70
348171 ... 71
348172 ... 72
348173 ... 72
348174 ... 73
348175 ... 76
348176 ... 79
348177 ... 78
348178 ... 78
348179 ... 76
348180 ... 63
348181 ... 63
348182 ... 63
348183 ... 63
348184 ... 63
348185 ... 63
348186 ... 61
348187 ... 61
348188 ... 61
348189 ... 61
348190 ... 61
348191 ... 61
348192 ... 61
348193 ... 61
348194 ... 61
348195 ... 61
348196 ... 61
348197 ... 61
348198 ... 59
348199 ... 59
348200 ... 59
348201 ... 59
348202 ... 59
348203 ... 59
348204 ... 59
348205 ... 59
348206 ... 59
348207 ... 59
348208 ... 59
348209 ... 59
348210 ... 77

4

401003 ... 69
401004 ... 69
401005 ... 69
401006 ... 69
401007 ... 69
401008 ... 69
401009 ... 52
401010 ... 52
401011 ... 279
401012 ... 279
401013 ... 279
401014 ... 279
401015 ... 279
401016 ... 279
449200 ... 95
449201 ... 95
449202 ... 95
449210 ... 96
449211 ... 96
449212 ... 96

5

501000 ... 776
501001 ... 776
501002 ... 776
501003 ... 776
501004 ... 776
501008 ... 776
501011 ... 776
501012 ... 776
501013 ... 776
501032 ... 777
501033 ... 777
561201 ... 723
561202 ... 723
563009 ... 200
565007 ... 136
565010 ... 136
565067 ... 108
565068 ... 108
565070 ... 108
565071 ... 108
565082 ... 116
565083 ... 116
565084 ... 116
565085 ... 116
565088 ... 116
565089 ... 116
565090 ... 116
565091 ... 116
565094 ... 116
565095 ... 116
565096 ... 116
565097 ... 116
565102 ... 117
565103 ... 117
565108 ... 120
565109 ... 120
565110 ... 120
565111 ... 120
565152 ... 139
565153 ... 139
565154 ... 139
565155 ... 139
565156 ... 139
565157 ... 139
565158 ... 139
565159 ... 139
565160 ... 139
565161 ... 139
565162 ... 139
565163 ... 139
565172 ... 120
565173 ... 120
565180 ... 136
565181 ... 136
565182 ... 137
565183 ... 137
565184 ... 137
565185 ... 137
565192 ... 133
565193 ... 121
565194 ... 121
565195 ... 123
565198 ... 121
565200 ... 124
565201 ... 124
565202 ... 124
565203 ... 124
565220 ... 153
565221 ... 153
565224 ... 134
565229 ... 118
565230 ... 118
565231 ... 118
565232 ... 118
565233 ... 119
565234 ... 119
565235 ... 119
565236 ... 119
565237 ... 126
565240 ... 126
565241 ... 126
565244 ... 126
565245 ... 127
565246 ... 127
565247 ... 123
565248 ... 117
565250 ... 144
565251 ... 144
565252 ... 145
565253 ... 146
565254 ... 146
565255 ... 147
565256 ... 148
565257 ... 148
565258 ... 149
565261 ... 135
565262 ... 128
565263 ... 128
565264 ... 128
565265 ... 128
565278 ... 129
565279 ... 129
565280 ... 129
565281 ... 129
565282 ... 129
565283 ... 129
565284 ... 129
565285 ... 129
565299 ... 130
565300 ... 130
565301 ... 130
565302 ... 130
565303 ... 130
565304 ... 130
565305 ... 130
565306 ... 130
565307 ... 131
565308 ... 131
565309 ... 131
565310 ... 131
565315 ... 111
565316 ... 112
565317 ... 112

565318 113
565320 138
565321 138
565322 138
565323 138
565325 287
565326 286
565327 114
565328 115
565329 115
565332 113
565335 131
565336 131
565337 132
565338 132
565339 132
565342 141
565343 140
565344 141
565351 141
565352 142
565353 142
565354 141
565355 125
565356 125
565357 125
565358 125
565359 125
565360 125
565361 140
565362 111
565363 112
565364 112
565365 113
565366 113
565367 138
565368 138
565369 138
565370 138

6

620006 227
620007 227
620012 228
620013 228
620014 229
620015 229
620016 230
620017 230
620018 231
620019 231
620020 232
620021 233
620031 252
620032 252
620033 55
620034 55
620035 55
620036 55
620037 55
620038 55
620039 55
620040 55
620041 56
620042 56
620043 56
620044 56
620045 56
620046 56
620047 56
620048 56
620049 57
620050 57
620051 57
620052 57
620053 57
620054 57
620055 57
620056 57
620057 247
620102 247
620103 247
620104 249
620105 247
620106 247
620107 247
620108 247
620109 247
620110 247
620111 249
620112 249
620113 249
620114 249
620115 249
620116 249
620117 249
620118 249
620119 322
620120 322
620123 399
620124 399
620125 399
620126 399
620127 399
620128 399
620129 399
620130 399
620132 186
620133 186
620134 186
620135 186
620136 182
620137 182
620138 182
620139 182
620140 182
666662 766
666663 766
666664 766
686864 94
686867 94
686868 94
686869 94
686871 94
686880 94
686940 234
687034 228
687035 229
687062 224
687063 233
687064 224
687065 232
687070 224
687071 224
687072 224
687073 224
687074 225
687075 225
687076 225
687077 225
687078 225
687079 225
687095 235
687096 226
687117 224
687118 224
687130 230
687131 231
688003 234
688008 519
688019 519
688020 518
688021 518
688024 519
688025 239
688026 239
688027 239
688028 239
688029 240
688030 240
688031 240
688033 240
688034 240
688035 240
688036 240
688037 240
688038 242
688039 242
688040 242
688041 242
688042 242
688043 242
688044 242
688045 242

7

700229 805
700230 805
707015 324
707034 324
707036 328
707037 328
707038 328
707039 328
707040 329
707041 329
707042 329
707043 329
707044 336
707045 324
707046 324
707047 324
707048 324
707054 328
707055 328
707056 329
707057 329
707067 331
707068 331
707069 330
707070 330
707079 325
707080 325
707081 325
707082 337
707083 337
707084 324
707085 324
707086 324
707087 324
707088 324
707089 324
707090 327
707091 327
707092 327
707093 327
707094 326
707095 326
707096 326
707097 326

707098....326
707099....326
707100....326
707101....326
707102....326
707103....326
707104....326
707105....326
707106....326
707107....326
707108....326
707109....326
707110....323
707111....323
707112....323
707113....323
707114....323
707115....323
707116....332
707117....332
707118....333
707119....333
707120....333
707121....333
707122....333
707123....333
707124....334
707125....334
707126....334
707127....334
707128....334
707129....334
707130....321
707131....336
707132....335
707133....335
707134....321
707135....321
707136....321
707137....321
707138....321
707139....321
707140....321
710000....299
710001....299
710002....299
710003....299
710004....299
710005....299
710006....299
710007....299
710008....299
710009....301
710010....301
710011....301
710012....301
710013....301
710014....301
710015....303
710016....303
710017....303
710018....303
710019....303
710020....303
710024....316
710026....316
710027....305
710028....305
710029....305
710030....305
710031....305
710032....305
710033....306
710034....306
710035....306
710036....304
710037....304
710038....304
710039....302
710040....302
710041....302
710042....302
710043....302
710044....302
710045....300
710046....300
710047....300
710048....310
710049....310
710050....310
710051....313
710052....313
710053....313
710054....316
710055....316
710056....316
710057....308
710058....308
710059....308
710060....317
710061....317
710062....317
710063....308
710064....308
710065....308
710066....307
710067....307
710068....307
710069....299
710070....299
710071....299
710077....307
710078....309
710079....307
710082....311
710083....311
710084....309
710085....309
710086....309
710087....309
710088....309
710089....301
710090....302
710091....304
710092....306
710093....305
710094....310
710095....310
710096....310
710097....314
710098....314
710099....314
730007....365
730008....500
730009....364
730032....365
730034....392
730199....493
730209....492
730211....486
730238....458
730244....494
730248....492
730249....487
730250....487
730255....485
730262....499
730263....500
730266....491
730267....491
730275....803
730276....494
730289....488
730292....499
730296....488
730300....793
730301....793
730328....408
730329....408
730330....415
730331....415
730332....369
730333....369
730336....483
730339....478
730340....478
730349....805
730354....377
730355....414
730364....375
730365....375
730380....408
730381....412
730382....412
730395....405
730407....426
730408....426
730409....426
730410....426
730419....277
730420....490
730421....490
730424....277
730425....277
730432....499
730434....499
730436....501
730437....501
730438....481
730439....481
730447....480
730449....495
730450....278
730454....495
730455....278
730459....482
730464....511
730465....511
730466....511
730468....481
730469....481
730470....478
730474....476
730475....476
730476....476
730477....476
730478....477
730479....477
731005....390
731006....390
731007....390
731008....391
731009....391
731010....391
731011....391
731014....412
731015....409
731016....400
731019....409
731020....409

731021 407
731024 409
731025 409
731026 409
731029 409
731030 409
731031 393
731033 416
731052 427
731053 427
731059 392
731060 415
731068 405
731071 407
731072 407
731087 414
731088 414
731098 459
731099 411
731100 411
731102 420
731109 421
731112 400
731113 419
731116 357
731118 417
731119 423
731122 355
731124 418
731127 408
731128 408
731129 416
731130 406
731131 406
731132 394
731133 404
731134 416
731135 416
731136 416
731137 395
731138 403
731139 403
731140 403
731141 403
731142 284
731143 285
731144 404
732014 466
732016 466
732036 458
732037 458
732041 514
732043 514
732045 514
732049 496
732050 497
732064 512
732071 470
732072 471
732074 467
732075 467
732076 467
732079 470
732080 471
732084 271
732085 271
732093 459
732094 459
732095 459
732096 514
732097 514
732098 514
732099 514
732100 514
732101 514
732102 514
732103 514
732104 461
732105 512
732108 462
732109 463
732110 464
732123 462
732124 463
732125 464
732126 457
732127 462
732128 463
732129 464
732134 461
732136 465
732137 465
732138 269
732139 269
732140 269
732141 269
732142 269
732143 496
732147 510
732148 510
732149 510
732150 510
732151 510
732152 510
732153 510
732154 510
732155 510
733004 376
733006 375
733007 377
733008 375
733012 364
733018 369
733027 443
733028 364
733032 443
733033 374
733034 374
733035 374
733037 379
733038 379
733039 379
733040 370
733041 370
733042 370
733043 372
733044 372
733045 372
733046 357
733047 374
733048 374
733049 355
733050 355
733051 358
733054 449
733055 449
733056 382
733057 385
733058 385
733059 456
733060 456
733061 367
733062 366
733063 366
733064 453
733065 453
733066 450
733067 451
733068 380
733069 380
740005 506
740006 507
740007 504
763004 434
763005 434
763006 434
763007 434
763011 434
763012 434
763025 436
763026 438
785016 505
785017 505

8

800023 799
800024 799
800025 799
800026 799
800027 799
800028 799
800029 799
800030 727
800033 799
800036 799
800100 798
800105 798
800106 798
800107 798
800108 798
800109 798
800111 798
800112 798
800114 798
800115 798
800116 798
819066 794
819067 794
819070 794
819071 794
819072 794
829063 ..... 100, 101, 102, 103, 104, 105, 106, 107, 108, 120, 121, 123, 124, 126, 127, 128, 129, 130, 131, 785, 94, 95, 96, 97, 98, 99
836011 442
836012 443
836013 443
836014 442
836015 443
836016 443
836018 444
836019 444
836020 445
836930 442
836931 442
836934 443
836935 443
836958 442
836960 443
836961 443
836962 443
836963 443
840097 657
840122 652
840124 652
840142 657
840144 667

840147 664
840158 649
840159 649
840164 647
840165 647
840166 647
840167 647
840172 647
840175 650
840178 650
840179 650
840180 650
840186 653
840187 653
840192 651
840193 651
840194 651
840210 650
840236 667
840239 669
840254 663
840256 665
840267 650
840276 663
840283 680
840285 671
840286 675
840287 681
840288 673
840289 677
840290 683
840291 649
840293 804
840294 804
840295 804
840296 639
840304 639
840308 668
840309 668
840317 655
840318 655
840319 655
840320 655
840321 640
840322 640
840323 639
840324 639
840331 652
840332 652
840333 653
840334 653
840337 655
840338 655
840339 655
840340 655
840349 660
840350 659
840351 665
840352 664
840353 668
840373 669
840374 643
840375 645
840376 679
840378 659
840379 660
840386 685
840387 685
840388 685
840389 685
840390 685
840391 685
843000 750
843001 749
843003 750
843004 751
843005 748
843007 734
843008 740
843010 759
843011 740
843018 744
843019 744
843020 745
843021 745
843033 783
843037 741
843042 783
843043 783
843044 784
843045 785
843046 753
843047 752
843049 741
843050 741
843051 758
843052 758
843053 735
843054 757
843055 785
843056 742
843057 742
843058 743
843059 743
843060 756
843061 737
843069 738
843268 754
843269 754
843273 756
843274 ..... 707, 757
843275 ..... 707, 757
843335 755
843336 755
843337 755
861203 748
862037 ..... 224, 225
862038 ..... 224, 225
862048 712
862049 712
862050 712
862074 ..... 224, 225
862093 697
862094 697
862121 697
862122 697
862123 697
862124 697
862125 697
862126 697
862127 698
862128 711
862129 711
862130 712
862132 712
862133 713
862136 715
862138 715
862141 717
862142 717
862157 713
862160 ..... 703, 704
862161 ..... 703, 704
862162 698
862163 698
862164 698
862165 698
862166 698
862167 698
862168 698
862172 697
862173 697
862174 721
862175 721
862176 721
862180 315
862181 315
862182 315
862183 315
862184 315
862185 315
862187 725
862188 725
862189 725
862190 719
862191 719
862192 719
862193 719
862194 719
862196 713
862197 713
862198 713
862199 713
862201 713
862202 715
862203 715
862204 715
862205 715
862207 715
862208 715
862209 715
862210 715
862211 715
862212 711
862220 701
862221 701
862222 701
862223 712
862225 712
862229 696
862230 696
862232 697
862233 697
862234 697
862235 715
862236 715
862237 715
862238 712
862239 712
862240 701
862241 701
862242 701
862243 722
862244 722
862245 722
862246 720
862247 720
862248 720
862249 706
862250 706
862251 706
862252 706
862253 704
862254 704
862255 704
862256 704
862257 716
862258 716
862259 716
872011 702

872014 714
872026 711
872045 700
872046 700
872065 711
872082 698
872083 698
872084 698
872085 698
872086 698
872087 698
872088 698
872089 698
872091 698
872093 698
872094 698
872097 699
872098 699
872099 699
872100 699
872101 699
872102 699
872103 699
872104 699
872105 699
872106 699
872107 699
872108 699
872109 706
872110 706
872111 706
872112 706
872113 706
872114 706
872115 706
872116 699
872117 703
872118 705
872119 699
872120 703
872121 705
872122 699
872123 703
872124 705
872125 699
872126 703
872127 696
872128 696
872131 711
872132 714
872134 714
872135 701
872136 701
872137 701
872138 701
872628 712
872629 697
872630 697
872632 697
872634 712
872647 715
872817 702
882271 ..... 752, 753, 794
882272 794

9

920132 784
930001 787
930006 787
930007 511
930036 784
930060 782
930071 ..... 277, 278
930072 ..... 277, 278
930074 ..... 101, 133
930075 ..... 101, 133
930076 ..... 101, 133
930077 ..... 101, 133
930078 ..... 101, 133
930079 ..... 101, 133
930084 142
930085 142
930087 142
930088 142
930089 143
930090 143
930091 143
930092 143
930093 143
930094 143
930095 143
930096 143
930097 143
930099 ..... 101, 133
930100 ..... 101, 133
930103 807
930104 807
930105 807
930160 224
930167 153
930191 224
930209 224
930212 224
930213 224
930214 ..... 224, 225
930215 ..... 144, 146, 148
930216 ..... 144, 146, 148
930217 ..... 145, 147, 149
930218 ..... 144, 146, 148
930219 ..... 144, 146, 148
930220 ..... 145, 147, 149
930230 153
930242 ..... 224, 225
930243 224
930244 225
930245 225
930246 225
930247 225
930248 225
930249 225
930250 225
930251 225
930252 135
930253 135
930254 135
930255 135
930256 135
930257 135
930270 123
930271 123
930293 271
930295 271
930297 328
930298 328
930299 328
930300 328
930301 ..... 325, 328
930302 ..... 325, 328
930303 ..... 325, 328
930306 ..... 140, 173, 328, 336, 77
930307 ..... 140, 173, 328, 336, 77
930308 ..... 140, 173, 328, 336, 77
930309 ..... 140, 173, 328, 336, 77
930310 ..... 140, 173, 328, 336, 77
930311 329
930312 329
930313 329
930314 329
930315 329
930316 329
930317 329
930318 329
930320 329
930321 329
930322 329
930323 329
930324 329
930327 78
930329 ..... 141, 78
930331 ..... 141, 78
930332 ..... 141, 78
930333 ..... 141, 78
930335 ..... 173, 336, 77
930337 ..... 140, 173, 336, 77
930339 ..... 140, 173, 336, 77
930340 ..... 140, 173, 336, 77
930341 ..... 140, 173, 336, 77
930345 804
930346 804
930347 804
930348 804
930349 804
930350 804
930363 329
930364 328
930365 329
930366 ..... 325, 328
930371 ..... 140, 173, 336, 77
930381 ..... 141, 78
930382 ..... 141, 79
930386 323
930387 323
930388 323
930390 ..... 141, 79
930392 ..... 141, 79
930394 79
930396 ..... 141, 79
930398 ..... 141, 79
930399 ..... 141, 79
930402 801
930405 804
930406 804
930410 514
930411 514
930413 437
930414 437
930415 437
930416 437
930417 437
930418 437
930419 437
930420 437
930421 437
930422 437
930423 437
930424 437
930426 ..... 461, 462, 805
930427 ..... 463, 464, 465, 805
930428 461

930430....461
930431....462
930432....462
930434....463
930435....463
930437....464
930438....464
930441....462
930442....463, 464
930443....679, 680
930444....679, 680
930445....671, 675
930446....671, 675
930447....681, 683
930448....673, 677
930449....673, 677
930451....681, 683
930460....738
930461....439
930468....439
930469....439
930470....439
930471....439
930472....439
930473....439
930474....439
930475....439
930476....439
930477....439
930478....439
930480....200
930481....201
930482....200
930483....200
930484....200
930485....200
930486....200
930487....200
930488....200
930489....200
930490....200
930491....200
930492....200
930493....200
930494....201
930495....201
930496....201
930497....201
930498....201
930499....201
930500....201
930501....201
930502....201
930503....201
930504....201
930505....201
930512....650
930513....650
930514....651
930515....651
930516....664
930517....667
930530....679, 680
930531....671, 675
930532....681, 683
930533....673, 677
930544....322, 83
930545....322, 83
930546....322, 83
930558....465
930567....465
930568....465
930569....465
930571....801
930573....801
930574....803
930575....802
930576....802
930577....322, 83
930578....802
930583....805
930584....805
930585....805
930586....805
930587....462, 463, 464, 465, 797
930590....269
930593....671, 673, 675, 677, 679, 680, 681, 683, 685, 806
930611....344
930612....344
930613....344
930614....344
930615....344
930616....344
930617....344
930618....345
930619....345
930620....345
930621....345
930622....345
930623....345
930624....345
930625....345
930626....345
930627....345
930628....345
930629....345
930630....345
930631....345
930632....282, 283
930633....282, 283
930634....282, 283
930641....269
930642....269
930647....52
930652....111
930653....112
930654....112
930655....113
930656....113
930659....805
930663....806
930664....156, 158, 159
930665....156, 157, 158, 159, 162, 163, 164, 166, 167
930666....156, 157, 158, 159, 162, 163, 164
930667....156, 158, 159
930668....156, 157, 158, 159
930669....156, 157, 158, 159
930670....162, 163, 164, 166, 167
930671....162, 163, 164
930672....162, 163
930673....162
930674....156, 157, 158, 159, 162, 163
930675....162
930676....156, 157, 158, 159
930677....333
930678....333
930679....13, 332, 334, 84, 86
930680....13, 333, 334, 85, 87
930681....13, 333, 334, 85, 87
930682....333, 85, 87
930684....333, 85, 87
930685....269
930686....269
930687....269
930688....162
930689....685
930690....685
930691....685
930692....685
930693....685
930694....797
940010....793
940029....792
940030....792
940031....792
940032....789
940033....792
940034....792
940035....792
940036....789
940037....792
940038....792
940039....792
940040....789
940041....793
940042....793
940043....793
940044....789
940045....793
940046....793
940047....793
940048....789
940049....793
940050....793
940051....793
940052....789
940056....791
940057....791
940058....791
940059....791
940060....791
940061....791
940062....791
940063....791
940064....789
940065....789
940066....789
940067....789
970000....534
970001....534
970003....534
970005....534
970007....534
970008....534
970020....536
970021....536
970023....536
970025....536
970027....536
970028....536
970029....536
970040....538
970041....538
970043....538
970045....538
970047....538

970048 538
970060 540
970061 540
970063 540
970065 540
970068 540
970080 532
970081 532
970083 532
970085 532
970100 534
970101 534
970103 534
970105 534
970108 534
970120 536
970121 536
970123 536
970125 536
970128 536
970129 536
970140 538
970141 538
970143 538
970145 538
970147 538
970148 538
970160 540
970161 540
970163 540
970165 540
970168 540
970180 532
970181 532
970183 532
970185 532
970201 542
970202 542
970231 558
970261 556
970262 556
970280 562
970281 562
970284 562
970285 562
970301 576
970303 576
970305 576
970308 576
970401 580
970403 580
970404 580
970431 578
970433 578
970434 578
970437 578
970438 578
970460 570
970470 572
970502 566
970503 566
970520 568
970522 568
970523 568
970550 584
970551 584
970560 586
970561 586
970570 588
970571 588
970600 574
970601 574
970602 574
970723 618
970724 618
970741 622
970762 ..... 595, 597, 627
970764 ..... 623, 625
970770 557
975001 546
975003 546
975005 546
975008 546
975021 548
975023 548
975025 548
975028 548
975029 548
975041 550
975043 550
975045 550
975061 552
975063 552
975065 552
975081 544
975083 544
975085 544
975101 546
975103 546
975105 546
975108 546
975121 548
975123 548
975125 548
975128 548
975129 548
975141 550
975143 550
975145 550
975148 550
975161 552
975163 552
975165 552
975168 552
975181 544
975183 544
975185 544
975231 560
975331 602
975334 602
975341 608
975344 608
975351 612
975353 612
975360 604
975361 604
975365 604
975371 610
975375 610
975381 614
975385 614
975390 606
975391 606
975394 606
975395 606
975411 582
975412 582
975471 594
975475 594
975476 594
975483 596
975485 596
975486 596
975491 592
975495 592
975496 592
975501 598
975723 620
975724 620
975741 624
975781 626
978000 535
978001 535
978002 535
978010 537
978011 537
978012 537
978020 539
978021 539
978022 539
978030 541
978031 541
978032 541
978040 535
978041 535
978042 535
978050 537
978051 537
978052 537
978060 539
978061 539
978062 539
978070 541
978071 541
978072 541
978080 547
978081 547
978082 547
978090 549
978091 549
978092 549
978100 551
978101 551
978102 551
978110 553
978111 553
978112 553
978120 547
978121 547
978122 547
978130 549
978131 549
978132 549
978140 551
978141 551
978142 551
978150 553
978151 553
978152 553
978161 543
978170 581
978171 581
978175 599
978191 567
978201 569
978211 603
978221 609
978231 613
978241 575
978242 575
978250 593
978251 593
978252 593
978260 595
978261 595
978270 597
978271 597
978291 559
978301 561
978311 557

978341....583
978351....543
978361....543
978370....585
978380....587
978390....589
978500....535
978501....535
978502....535
978510....537
978511....537
978512....537
978520....539
978521....539
978522....539
978530....541
978531....541
978532....541
978540....535
978541....535
978542....535
978550....537
978551....537
978552....537
978560....539
978561....539
978562....539
978570....541
978571....541
978572....541
978580....547
978581....547
978582....547
978590....549
978591....549
978592....549
978600....551
978601....551
978602....551
978610....553
978611....553
978612....553
978620....547
978621....547
978622....547
978630....549
978631....549
978632....549
978640....551
978641....551
978642....551
978650....553
978651....553
978652....553
978660....533
978661....533
978662....533
978670....533
978671....533
978672....533
978680....545
978681....545
978682....545
978690....545
978691....545
978692....545
978700....577
978701....577
978702....577
978711....559
978721....561
979000....537
979001....537
979002....537
979010....539
979011....539
979012....539
979020....537
979021....537
979022....537
979030....539
979031....539
979032....539
979040....549
979041....549
979042....549
979050....551
979051....551
979052....551
979060....549
979061....549
979062....549
979070....551
979071....551
979072....551
979080....535
979081....535
979082....535
979090....541
979091....541
979092....541
979100....535
979101....535
979102....535
979110....541
979111....541
979112....541
979120....547
979121....547
979122....547
979130....553
979131....553
979132....553
979140....547
979141....547
979142....547
979150....553
979151....553
979152....553
979160....533
979161....533
979162....533
979170....533
979171....533
979172....533
979180....545
979181....545
979182....545
979190....545
979191....545
979192....545
979200....595
979201....595
979210....597
979211....597
979221....559
979231....561
979241....557
979500....537
979501....537
979502....537
979510....539
979511....539
979512....539
979520....537
979521....537
979522....537
979530....539
979531....539
979532....539
979540....549
979541....549
979542....549
979550....551
979551....551
979552....551
979560....549
979561....549
979562....549
979570....551
979571....551
979572....551
979580....535
979581....535
979582....535
979590....541
979591....541
979592....541
979600....535
979601....535
979602....535
979610....541
979611....541
979612....541
979620....547
979621....547
979622....547
979630....553
979631....553
979632....553
979640....547
979641....547
979642....547
979650....553
979651....553
979652....553
979660....533
979661....533
979662....533
979670....533
979671....533
979672....533
979680....545
979681....545
979682....545
979690....545
979691....545
979692....545
979700....595
979701....595
979710....597
979711....597
979721....559
979731....561
979741....557
979751....579
979760....585
979770....587
979780....589
980000....537
980001....537
980002....537
980010....537
980011....537
980012....537
980020....563
980021....563
980023....563
980040....549
980041....549

980042 549
980060 549
980061 549
980062 549
980501 609
980511 613
980541 577
980550 585
980560 587
980570 589
981001 619
981011 621
981021 627
981031 623
981041 625
983000 ..... 535, 547, 603, 607, 609, 613
983001 ..... 535, 547, 603, 607, 609, 613
983002 ..... 535, 547, 603, 607, 609, 613
983003 ..... 535, 547, 603, 607, 609, 613
983004 ..... 535, 547, 603, 607, 609, 613
983005 ..... 535, 547, 603, 607, 609, 613
983006 ..... 535, 547, 603, 607, 609, 613
983007 ..... 535, 547, 603, 607, 609, 613
983008 ..... 535, 547, 603, 607, 609, 613
983010 ..... 537, 549, 567, 569, 575, 577, 581, 595, 597
983011 ..... 537, 549, 567, 569, 575, 577, 581, 595, 597
983012 ..... 537, 549, 567, 569, 575, 577, 581, 595, 597
983013 ..... 537, 549, 567, 569, 575, 577, 581, 595, 597
983014 ..... 537, 549, 567, 569, 575, 577, 581, 595, 597
983015 ..... 537, 549, 567, 569, 575, 577, 581, 595, 597
983016 ..... 537, 549, 567, 569, 575, 577, 581, 595, 597
983017 ..... 537, 549, 567, 569, 575, 577, 581, 595, 597
983018 ..... 537, 549, 567, 569, 575, 577, 581, 595, 597
983020 ..... 539, 551, 559, 561, 583, 593, 605, 611, 615
983021 ..... 539, 551, 559, 561, 583, 593, 605, 611, 615
983022 ..... 539, 551, 559, 561, 583, 593, 605, 611, 615
983023 ..... 539, 551, 559, 561, 583, 593, 605, 611, 615
983024 ..... 539, 551, 559, 561, 583, 593, 605, 611, 615
983025 ..... 539, 551, 559, 561, 583, 593, 605, 611, 615
983026 ..... 539, 551, 559, 561, 583, 593, 605, 611, 615
983027 ..... 539, 551, 559, 561, 583, 593, 605, 611, 615
983028 ..... 539, 551, 559, 561, 583, 593, 605, 611, 615
983030 ..... 541, 553, 573
983031 ..... 541, 553, 573
983032 ..... 541, 553, 573
983033 ..... 541, 553, 573
983034 ..... 541, 553, 573
983035 ..... 541, 553, 573
983036 ..... 541, 553, 573
983037 ..... 541, 553, 573
983038 ..... 541, 553, 573
983040 ..... 543, 557, 571, 573
983041 ..... 543, 557, 571, 573
983044 ..... 543, 557, 571, 573
983045 ..... 543, 557, 571, 573
983046 ..... 543, 557, 571, 573
983060 ..... 537, 549, 567, 569, 575, 577, 581, 595, 597
983061 ..... 537, 549, 567, 569, 575, 577, 581, 595, 597
983062 ..... 537, 549, 567, 569, 575, 577, 581, 595, 597
983080 567
983081 567
983082 567
983090 563
983091 563
983100 585
983101 585
983110 587
983111 587
983120 589
983121 589
983500 ..... 535, 547
983501 ..... 535, 547
983502 ..... 535, 547
983503 ..... 535, 547
983504 ..... 535, 547
983505 ..... 535, 547
983506 ..... 535, 547
983510 ..... 537, 549, 575, 577, 581
983511 ..... 537, 549, 575, 577, 581
983512 ..... 537, 549, 575, 577, 581
983513 ..... 537, 549, 575, 577, 581
983514 ..... 537, 549, 575, 577, 581
983515 ..... 537, 549, 575, 577, 581
983516 ..... 537, 549, 575, 577, 581
983517 ..... 537, 549, 575, 577, 581
983518 ..... 537, 549, 575, 577, 581
983520 ..... 539, 551, 559, 561, 583
983521 ..... 539, 551, 559, 561, 583
983522 ..... 539, 551, 559, 561, 583
983523 ..... 539, 551, 559, 561, 583
983524 ..... 539, 551, 559, 561, 583
983525 ..... 539, 551, 559, 561, 583
983526 ..... 539, 551, 559, 561, 583
983527 ..... 539, 551, 559, 561, 583
983530 ..... 541, 553, 573
983531 ..... 541, 553, 573
983532 ..... 541, 553, 573
983533 ..... 541, 553, 573
983534 ..... 541, 553, 573
983535 ..... 541, 553, 573
983536 ..... 541, 553, 573
983539 ..... 541, 553, 573
983550 ..... 533, 545
983551 ..... 533, 545
983554 ..... 533, 545
983555 ..... 533, 545
983556 ..... 533, 545
983560 ..... 537, 549, 575, 577, 581
983561 ..... 537, 549, 575, 577, 581
983562 ..... 537, 549, 575, 577, 581
984002 ..... 535, 547, 607
984003 ..... 535, 547, 607
984004 ..... 535, 547, 607
984005 ..... 535, 547, 607
984010 ..... 537, 549, 575, 581, 595, 597
984011 ..... 537, 549, 575, 581, 595, 597
984012 ..... 537, 549, 575, 581, 595, 597
984013 ..... 537, 549, 575, 581, 595, 597
984014 ..... 537, 549, 575, 581, 595, 597
984015 ..... 537, 549, 575, 581, 595, 597
984017 ..... 537, 549, 575, 581, 595, 597
984018 ..... 537, 549, 575, 581, 595, 597
984022 ..... 539, 551, 559, 561, 583, 605
984023 ..... 539, 551, 559, 561, 583, 605
984024 ..... 539, 551, 559, 561, 583, 605
984025 ..... 539, 551, 559, 561, 583, 605
984026 ..... 539, 551, 559, 561, 583, 605
984032 ..... 541, 553, 573
984033 ..... 541, 553, 573
984034 ..... 541, 553, 573
984035 ..... 541, 553, 573

984036.....541, 553, 573
984044.....543, 557, 571, 573
984045.....543, 557, 571, 573
984054.....533, 545
984055.....533, 545
984502.....535, 547
984503.....535, 547
984504.....535, 547
984505.....535, 547
984510.....537, 549, 581, 595, 597
984511.....537, 549, 581, 595, 597
984512.....537, 549, 581, 595, 597
984513.....537, 549, 581, 595, 597
984514.....537, 549, 581, 595, 597
984515.....537, 549, 581, 595, 597
984517.....537, 549, 581, 595, 597
984518.....537, 549, 581, 595, 597
984522.....539, 551, 559, 561, 583
984523.....539, 551, 559, 561, 583
984524.....539, 551, 559, 561, 583
984525.....539, 551, 559, 561, 583
984526.....539, 551, 559, 561, 583
984532.....541, 553, 573
984533.....541, 553, 573
984534.....541, 553, 573
984535.....541, 553, 573
984544.....543, 557, 571, 573
984545.....543, 557, 571, 573
984554.....533, 545
984555.....533, 545
984565.....579
984568.....579
984570.....585
984571.....585
984580.....587
984581.....587
984590.....589
984591.....589
985010.....537, 549, 581
985011.....537, 549, 581
985016.....537, 549, 581
985504.....609, 613
985505.....609, 613
985508.....609, 613
985570.....585
985571.....585
985580.....587
985581.....587
985590.....589
985591.....589
985601.....599
985605.....599
987002.....535, 547
987004.....537, 549
987006.....539, 551, 583
987008.....541, 553
987010.....543
987020.....559, 561, 589, 593, 595
987025.....563
987026.....563
987027.....563
987040.....561, 593, 595
987060.....559, 589
987080.....535, 537, 539, 541, 543, 547, 549, 551, 553, 583
988021.....561
988025.....619, 621
988028.....619, 621
988054.....627
988055.....627
988084.....623, 625
988085.....623, 625
990109.....627

AT HOME EVERYWHERE – OUR LIGHTING SOLUTIONS ARE AT HOME IN EVERY APPLICATION. LET YOURSELF BE INSPIRED BY SELECTED PROJECT REFERENCES FROM A WIDE VARIETY OF AREAS.





With the kind support of Licht und Klein, Bergisch Gladbach

EXTERIOR

Whether free-standing luminaires, surface-mounted luminaires, underwater luminaires, recessed wall luminaires or wall washers - the outdoor area of a property, store or hotel should leave a lasting impression on visitors. Our example project shows a private house with an extensive outdoor area, which was staged with a great sense of noble elegance and lots of outdoor luminaires.

LIVING ROOM

Atmospheric lighting in the living room area is indispensable for creating a harmonious ambience. A prime example of the seamless integration of linear light into the building structure is shown in the project of a private residence. In order not to interrupt the area-wide effect of the 3D wallpaper along the open concrete staircase, the profiles and LED strips were integrated into the wall along the steps.





Foto: Daniel Vieser . Architekturfotografie, Karlsruhe

LINEAR LIGHT

In order to emphasize and highlight design elements in architecture or even to deliberately arouse emotions through the interplay of light and shadow, linear light is increasingly becoming the focus of attention. The office building of an architectural firm is impressive proof of this. A modern, open building – stylishly illuminated with linear lighting solutions from DEKO-LIGHT.



Foto: Daniel Vieser . Architekturfotografie, Karlsruhe

HOTEL AND GASTRONOMY

Bars, restaurants and hotels only become a cozy place where guests like to come again and again with the right lighting. For this reason, the versatile lighting and profile portfolio of DEKO-LIGHT was used for the lighting design of the extensive restaurant areas.





Mit freundlicher Unterstützung von SH-Lichttechnik / Becks Reutlingen




STORE AND TRADE FAIR CONSTRUCTION

An individual and well thought-out lighting design not only enhances the visual value of a retail environment, but also has a sales-promoting effect. Flexibility is the key here, because the layout and displays of a store can change again and again. With our D LINE track systems and matching store fitting and display luminaires, you are ideally equipped to set the lighting stage for your sales areas.



OFFICE AND BUSINESS PREMISES

A pleasant atmosphere at work not only boosts the mood of employees, but also their motivation and productivity. For an ultra-modern new company building in Karlsruhe, only luminaires and lighting technology from DEKO-LIGHT are used in an area of over 16,000 m^2 – from recessed ceiling luminaires in the corridors to custom solutions in the foyer area.

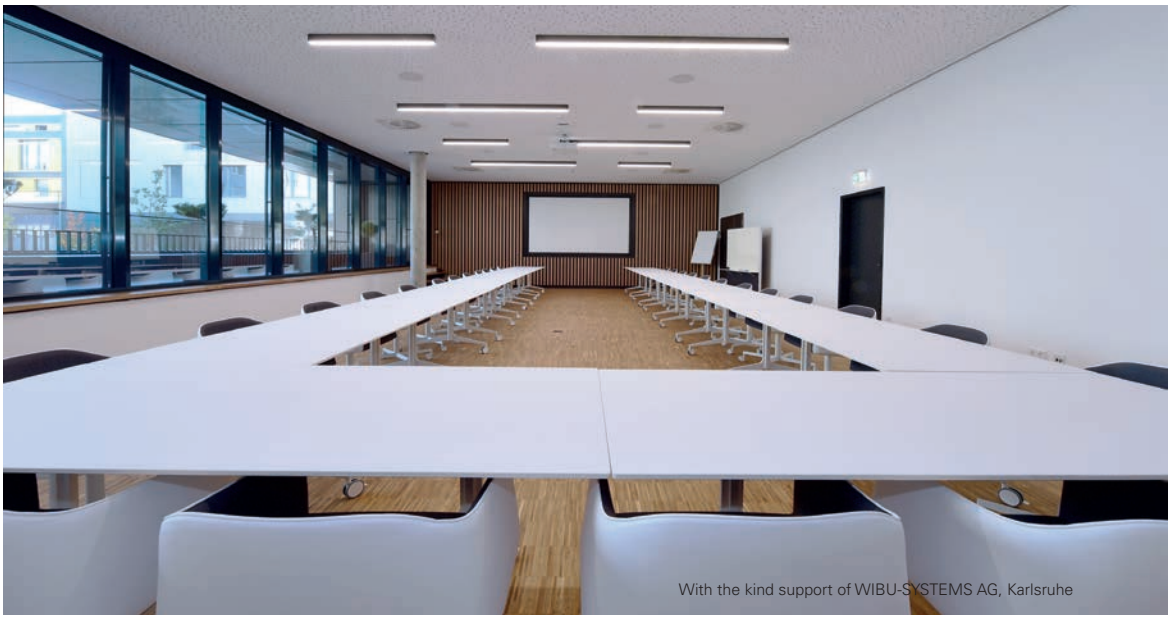

With the kind support of WIBU-SYSTEMS AG, Karlsruhe



With the kind support of WIBU-SYSTEMS AG, Karlsruhe





Christ





COMMERCIAL

Commercial spaces are highly functional and place the highest demands on lighting efficiency. In our example project, the hall lighting for a BOSCH car service provider was implemented with TriProof LED surface-mounted ceiling luminaires, which with their IP65 protection class are convincing even in the adjacent car wash.

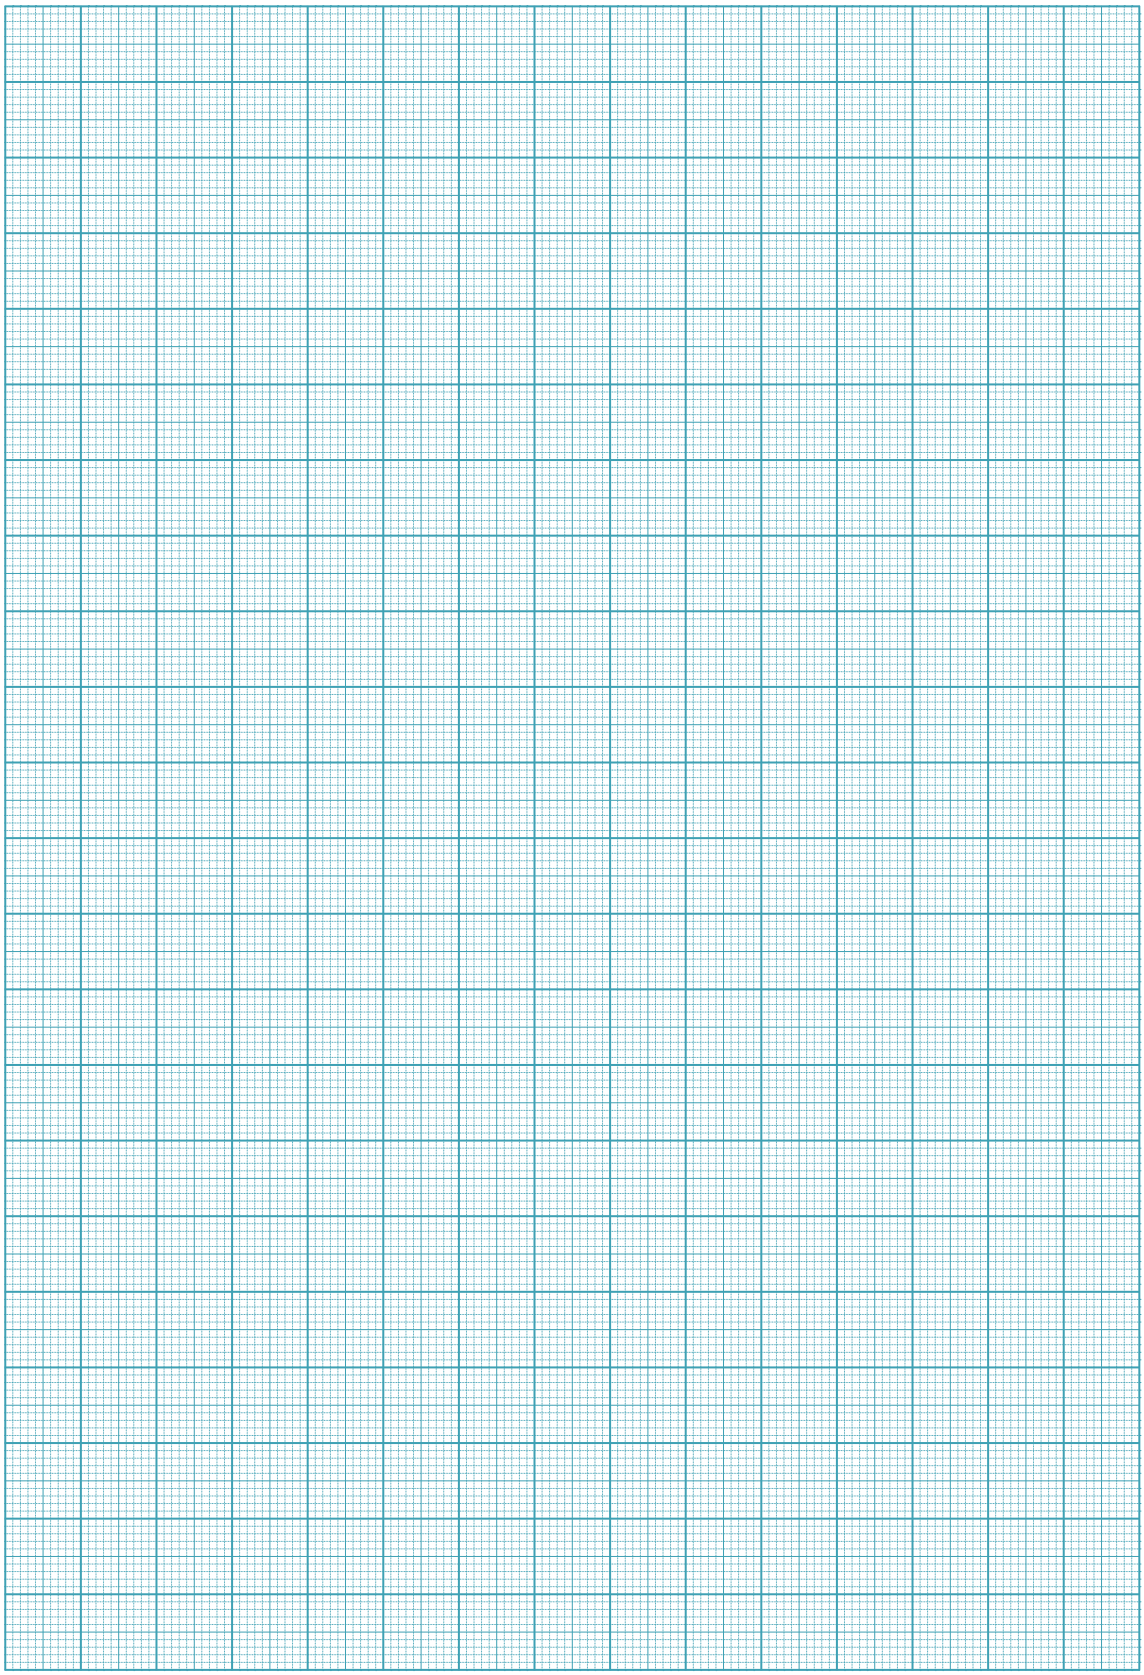

EVERYTHING ABOUT DEKO-LIGHT

In addition to the main catalogue, there are now also our application-specific segment catalogues or our SPOT ON! magazine, which provides plenty of inspiration as well as several products.





ALSO AVAILABLE ONLINE

Would you prefer to »leaf through« our publications online or on your tablet? You can find every catalogue, every brochure and all issues of the SPOT ON! Magazine on our homepage for browser viewing and as a PDF download.

DEKOLIGHT